3 Dec Fure
1.Q
X

TM 11-5821-244-34P

mk 12-1-71
20.00
311
M

TECHNICAL MANUAL

DS, GS, AND DEPOT MAINTENANCE REPAIR PARTS AND SPECIAL TOOLS LISTS

RADIO SET AN/ARC-54

5821-082-3598

MAINT. SUPPORT
CENTER LIBRARY

HEADQUARTERS, DEPARTMENT OF THE ARMY
SEPTEMBER 1971

205/42

TECHNICAL MANUAL
No. 11–5821–244–34P

HEADQUARTERS
DEPARTMENT OF THE ARMY
WASHINGTON, D.C., *28 September 1971*

DIRECT SUPPORT, GENERAL SUPPORT AND DEPOT MAINTENANCE REPAIR PARTS AND SPECIAL TOOLS LISTS

RADIO SET AN/ARC–54 (5821–082–3598)

		Paragraph	Page
SECTION I.	INTRODUCTION		
	Scope	1	2.1
	General	2	2.1
	Explanation of columns	3	2.1
	Special information	4	2.2
	Location of repair parts	5	2.3
	Federal supply codes for manufacturers	6	2.3
	Recommendations for maintenance publications improvements	7	2.4
II.	REPAIR PARTS (DS, GS, AND DEPOT)		4
	Control, Radio Set C3835ARC54 (Group 01)		4
	Mounting MT1535ARC54 (Group 02)		7
	Receiver-Transmitter, Radio RT348ARC54 (Group 03)		8
	Connector Assembly SMD550134 (Group 04)		84
	Coupler, Antenna CU–942/ARC–54 (Group 05)		85
	Coupler, Antenna CU–943/ARC–54 (Group 05)		85
	Coupler, Antenna CU–942/ARC–54 (Group 05)		85
III.	SPECIAL TOOLS, TEST AND SUPPORT EQUIPMENT		98
IV.	INDEX-FEDERAL STOCK NUMBER AND REFERENCE NUMBER CROSS-REFERENCE TO FIGURE AND ITEM NUMBER		91
V.	INDEX-REFERENCE DESIGNATION CROSS-REFERENCE TO PAGE NUMBER		134

*This manual supersedes TM 11–5821–244–35P, 22 January 1965.

SECTION I

INTRODUCTION

1. Scope

This manual lists repair parts required for the performance of direct support, general support, and depot maintenance of the AN/ARC–54.

2. General

This Repair Parts List is divided into the following sections:

a. Repair Parts—Section II. A list of repair parts authorized for the performance of maintenance at the direct support, general support, and depot level.

b. Special Tools, Test and Support Equipment—Section III. A list of special tools, test and support equipment authorized for the performance of maintenance at the direct support, general support, and depot level.

c. Federal Stock Number and Reference Number Index—Section IV. A list of Federal Stock Numbers in ascending numerical sequence, followed by a list of reference numbers appearing in all listings, in ascending alpha-numerical sequence, cross-referenced to the illustration figure number and item number.

d. Reference Designation Cross-Reference to Page Number Index—Section V. A list of reference designations used is ascending alpha-numerical sequence, cross-referenced to the page number of the Repair Parts List.

3. Explanation of Columns

The following provides an explanation of columns in tabular list, section II.

a. Source, Maintenance and Recoverability Codes (SMR)—Column 1.

(1) Source code indicates the selection status and source for the list item. Source codes are—

Code	*Explanation*
P	Repair parts which are stocked in or supplied from the GSA/DSA, or Army supply system and authorized for use at indicated maintenance categories.
P2	Repair parts which are procured and stocked for insurance purposes because the combat or military essentiality of the end item dictates that a minimum quantity be available in the supply system.
P9	Assigned to items which are NSA design controlled: Unique repair parts, special tools, test, measuring diagnostic equipment, which are stocked and supplied by the Army COMSEC logistic system, and which are not subject to the provisions of AR 380–41.
P10	Assigned to items which are NSA design controlled: Special tools, test, measuring and diagnostic equipment for COMSEC support, which are accountable under the provision of AR380–41, and which are stocked and supplied by the Army CONSEC logistic system.
M	Repair parts which are not procured or stocked, but are to be manufactured in indicated maintenance levels.
A	Assemblies which are not procured or stocked as such, but are made up of two or more units. Such component units carry individual stock numbers and descriptions, are procured and stocked separately and can be assembled to form the required assembly at indicated maintenance categories.
X	Parts and assemblies which are not procured or stocked and the mortality of which normally is below that of the applicable end item or component. The failure of such part or assembly should result in retirement of the end item from the supply system.
X1	Repair parts which are not procured or stocked. The requirement for such items will be filled by use of the next higher assembly or component.
X2	Repair parts which are not stocked. The indicated maintenance category requiring such repair parts will attempt to obtain same through cannibalization. Where such repair parts are not obtainable through cannibalization, requirements will be requisitioned, with accompanying justification, through normal supply channels.
G	Major assemblies that are procured with PEMA funds for initial issue only as exchange assemblies at DSU and GSU level. These assemblies will not be stocked above DS and GS level or returned to depot supply level.

(2) Maintenance code indicates the lowest category of maintenance authorized to install the listed item. The maintenance level codes are—

Code	*Explanation*
O	Organizational Maintenance
F	Direct Support Maintenance
H	General Support Maintenance
D	Depot Maintenance

(3) Recoverability code indicates whether

unserviceable items should be returned for recovery or salvage. Items not coded are expendable.

Code	*Explanation*
R	Repair parts and assemblies which are economically reparable at DSU and GSU activities and are normally furnished by supply on an exchange basis.
S	Repair parts and assemblies which are economically reparable at DSU and GSU activities and which normally are furnished by supply on an exchange basis. When items are determined by a GSU to be uneconomically reparable, they will be evacuated to a depot for evaluation and analysis before final disposition.
T	High dollar value recoverable repair parts which are subject to special handling and are issued on an exchange basis. Such repair parts normally are repaired or overhauled at depot maintenance activities.
U	Repair parts specifically selected for salvage by reclamation units because of precious metal content, critical materials, or high dollar value reusable casings or castings.

(4) SMR coding of selected common hardware items has been excluded. These items are authorized "as required".

b. Federal Stock Number, Column 2. Indicates the Federal Stock Number assigned to the item and will be used for requisitioning purposes.

c. Description, Column 3. Indicates the Federal item name and any additional description of the item required. A part number or other reference number is followed by the applicable five-digit Federal supply code for manufacturers in parentheses.

d. Unit of Measure (U/M), Column 4. A two character alphabetic abbreviation indicating the amount or quantity of the item upon which allowances are based, e.g., ft, ea, pr, etc.

e. Quantity Incorporated in Unit, Column 5. Indicates the quantity of the item used in the assembly group. A "V" appearing in this column in lieu of a quantity indicates that a definite quantity cannot be indicated (e.g., shims, spacers, etc.).

f. 30-Day DS/GS Maintenance Allowances, Columns 6 and 7.

NOTE

Allowances in GS column are for GS maintenance only.

(1) The allowance columns are divided into three sub-columns. Indicated in each subcolumn, opposite the first appearance of each item, is the total quantity of items authorized for the number of equipments supported. Subsequent appearances of the same item will have the letters "REF" in the applicable allowance columns. Items authorized for use as required, but not for stockage, are identified with an asterisk in the allowance column.

(2) The quantitative allowances for DS/GS levels of maintenance will represent initial stockage for a 30-day period for the numbers of equipments supported.

(3) Determination of the total quantity of parts required for maintenance of more than 100 of these equipments can be accomplished by converting the equipment quantity to a decimal factor by placing a decimal point before the next to last digit of the number to indicate hundredths and multiplying the decimal factor by the parts quantity authorized in the 51–100 allowance column. Example, authorized allowance for 51–100 equipments is 40; for 150 equipments multiply 40 by 1.50 or 60 parts authorized.

g. 1-Year Allowance Per 100 Equipments/Contingency Planning Purposes, Column 8. This column indicates opposite the first appearance of each item the total quantity required for distribution and contingency planning purposes. The range of items indicates total quantities of all authorized items required to provide for adequate support of 100 equipments for one year.

h. Depot Maintenance Allowance Per 100 Equipments, Column 9. This column indicates opposite the first appearance of each item, the total quantity authorized for depot maintenance of 100 equipments. Subsequent appearances of the same items will have the letters "REF" in the allowance column. Items authorized for use as required, but not for initial stockage are identified with an asterisk in the allowance column.

i. Illustration, Column 10. This column is divided as follows:

(1) *Figure number, column 10a.* Indicates the figure number of the illustration in which the item is shown.

(2) *Item number, column 10b.* Indicates the callout number used to reference the item in the illustration.

4. Special Information

a. Usable on Codes used in this publication pertain only to the Coupler Assemblies. When no codes are used within the Coupler Assemblies the items will be considered to apply to all models, identification of usable on codes are—

Code	*Used on*
A	CU–942/ARC–54
B	CU–943/ARC–54
C	CU–942A/ARC–54

b. Repair parts mortality is computed from failure rates derived from experience factors with

the individual parts in a variety of equipments. Variations in the specific application and periods of use of electronic equipment, the fragility of electronic piece parts, plus intangible material and quality factors intrinsic to the manufacture of electronic parts, do not permit mortality to be based on hours of end item use. However, long periods of continuous use under adverse conditions are likely to increase repair parts mortality.

c. Split Coding such as AF, MD, PH, etc., found in the source column indicate parts which require manufacture, assembly, or stockage at a category higher than that authorized to install the item. For example, an item coded MD–O denotes the source of the item to be manufactured (M) at the Depot level (D) and authorized for installation at the Organizational level (O).

d. The following publications pertain to the AN/ARC–54 and its components.

TM 11–5821–244–12	Operator and Organizational Maintenance Manual: Radio Set AN/ARC–54 and Control Indicator C–8157/ARC. Changes 1–4
TM 11–5821–244–20P	Organizational Maintenance Repair Parts and Special Tool Lists: Radio Set AN/ARC–54
TM 11–5821–244–35	Direct Support, General Support, and Depot Maintenance Manual: Radio Set AN/ARC–54 and Control Indicator C–8157/ARC. Changes 1–3
TM 11–6625–601–12	Organizational Maintenance Manual Including Repair Parts List: Maintenance Kit Electronic Equipment MK–733/ARC–54
TM 11–6625–601–45	General Support, and Depot Maintenance Manual Including Repair Parts and Special Tools List: Maintenance Kit Electronic Equipment MK–733/ARC–54

5. How to Locate Repair Parts

a. When Federal stock number or reference number is unknown:

(1) *First.* Using the table of contents (sec I) determine the functional group within which the repair part belongs (i.e. Group 01, Control, Radio, Set, Group 02, Mounting, etc.). Note the page number listed opposite the particular group.

(2) *Second.* Find the group in the Repair Parts List (Sec II) through page number noted. Using the listing and illustrations noted (Column 10) locate the repair part within the functional group.

b. When Federal Stock Number or reference number is known:

(1) *First.* Using the Index of Federal Stock Numbers and Reference Numbers find the pertinent Federal Stock Number or reference number and note the figure and item number (reference designation). This index is in ascending FSN sequence followed by a list of reference numbers in ascending alpha-numeric sequence, cross-referenced to the illustration figure number and item number (reference designation).

(2) *Second.* Using the Reference Designation Cross-Reference to Page Number Index (sec V) find the item number (reference designation) and note the page number listed. Locate the item in the Repair Parts List.

6. Federal Supply Codes for Manufacturers

Code	*Manufacturer*
00213	Sage Electronics Corp., Rochester, N.Y.
01121	Allen-Bradley Co., Milwaukee, Wis. 53204
01281	TRW Semiconductors Inc., Lawndale, Calif.
01295	Texas Instruments Inc., Dallas, Texas, 75231
01526	General Electric Co., Waynesboro, Va.
02114	Ferroxcube Corp., Saugerties, N.Y.
03550	Vanguard Electronics Co., Inglewood, Calif.
04222	Aerovox Corp., Myrtle Beach, S.C.
05010	Gulton Industries Inc., Metuchen, N.J.
06090	Raychem Corp., Menlo Park, Calif.
06743	Clevite Corp., Cleveland, Ohio
07047	The Ross Milton Co., South Hampton, Pa.
07294	Genisco Technology Corp., Compton, Calif.
08108	General Electric Co., Schenectady, N.Y.
08742	ACDC Electronics Inc., Burbank, Calif.
09143	Record Mfg. Co., Pasadena, Calif.
09922	Burndy Corp., Norwalk, Conn.
12014	Chicago Rivet and Machine Co., Bellwood, Ill.
13499	Collins Radio Co., Cedar Rapids, Iowa
14101	Sprague Electric Co., Vandalia, Ohio
14433	ITT Semiconductors, West Palm Beach, Fla.
16636	Indiana General Corp., Oglesby, Ill.
19070	Eastern Air Devices Inc., Dover, N.H.
23651	Systems Engineering Electronics Inc., Wewoka, Okla.
24446	General Electric Co., Schenectady, N.Y.
33173	General Electric Co., Owensboro, Ky.
37942	Mallory P.R. and Co., Inc., Indianapolis, Ind.
53021	Sangamo Electric Co., Springfield, Ill.
56289	Sprague Electric Co., North Adams, Mass., 01247
61957	USM Corp., Boston, Mass.
70117	Admiral Systems Corp., Chicago, Ill.
70309	Allied Control Co., Inc., New York, N.Y.
71279	Cambridge Thermionic Corp., Cambridge, Mass., 02138
71286	Camloc Div., Rex Chainbelt Inc., Paramus, N.J.
71400	McGraw and Edison Co., St. Louis, Mo.
71468	ITT Cannon Electric Inc., Los Angeles, Calif.
71590	Globe-Union Inc., Milwaukee, Wis.
71785	Cinch Mfg. Co., and Howard B. Jones Division, Chicago, Ill.
72619	Dialight Corp., Brooklyn, N.Y.

Code	Manufacturer
72962	Elastic Stop Nut Corp. of America, Union, N.J.
72982	Erie Technological Products Inc., Erie, Pa.
73680	Garlock, Inc., Palmyra, N.Y.
73899	J.F.D. Electronics Corp., Brooklyn, N.Y.
75042	I.R.C. Division of TRW Inc., Philadelphia, Pa.
75543	Lavelle Rubber Co., Chicago, Ill.
76854	Oak Mfg Co., Crystal Lake, Ill.
77147	Patton-MacGuyer Co., Div. of Avid Corp, Providence, R.I.
77820	The Bendix Corp., Sidney, N.Y.
78189	Illinois Tool Works, Inc., Elgin, Ill., 60126
79136	Waldes Kohinoor Inc., Long Island City, N.Y.
79807	Wrought Washer Mfg. Co., Milwaukee, Wis.
80058	Joint Electronic Type Designation System
80368	Sylvania Electric Products Inc., New York, N.Y.
81312	Litton Industries Inc., Oakville, Conn.
81349	Military Specifications, Promulgated by Standardization Div., Directorate of Logistic Services, DSA
81541	Airpax Electronics Inc., Cambridge, Md.
81860	Barry Wright Corp., Watertown, Mass.
82577	Hughes Aircraft Co., Culver City, Calif.
83086	New Hampshire Ball Bearing Inc., Peterborough, N.H.
84171	Arco Electronics Inc., Great Neck, N.Y.
88044	Aeronautical Standards Group, Dept. of Navy and Air Force
89462	Waldes Kohinoor Inc., Cambridge, Mass.
90030	USM Corp., Beverly, Mass.
90484	ITT Wire & Cable Div., Clinton, Mass.
91146	ITT Cannon Electric Inc., Salem, Mass.
91506	Augat Inc., Attleboro, Mass.
92825	Whitso, Inc., Schiller Park, Ill.
94375	Automatic Metal Products Corp., Brooklyn, N.Y.
94875	Electro & Tec Corp., West Caldwell, N.J.
95104	Collins Radio Co., Richardson, Tex.
95238	Continental Connector Corp., Woodside, N.Y.
95275	Vitramon Inc., Bridgeport, Conn.
96906	Military Standards, Promulgated by Standardization Div., Directorate of Logistic Services, DSA
98278	Microdot, Inc., Pasadena, Calif., 91030
98291	Sealectro Corp., Mamaroneck, N.Y.
99800	Delevan Electronics Corp., Aurora, N.Y.

7. Recommendations for Maintenance Publication Improvements

The reporting of errors, omissions and rceommendations for improving this publication by the individual user is encouraged. Reports should be submitted on DA Form 2028 (Recommended Changes to Publications) and forwarded direct to Commanding General, U.S. Army Electronics Command, ATTN: AMSEL–ME–NMP–EM, Fort Monmouth, N.J. 07703.

Next numbered page is 4.

(1) SMR CODE	(2) FEDERAL STOCK NUMBER	(3) DESCRIPTION REFERENCE NUMBER & MFR. CODE / USABLE ON CODE	(4) UNIT OF MEAS	(5) QTY INC IN UNIT	(6) 30-DAY DS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(7) 30-DAY GS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(8) 1 YR ALW PER 100 EQUIP CNTGCY	(9) DEPOT MAINT ALW PER 100 EQUIP	(10) ILLUSTRATIONS (a) FIG NO.	(b) ITEM NO. OR REFERENCE DESIGNATION
		GROUP 01 CONTROL, RADIO SET												
		COUNTER ASSEMBLY:	EA	1									2	A1A1
	5310-281-9845	..NUT, PLAIN, HEXAGON: MS20365D440A (96906)	EA	2	*	*	*	*	*	*	*	*	2	A1A1H2
	5310-275-0889	..NUT, PLAIN, HEXAGON: 313-0132-00 (13499)	EA	6	*	*	*	*	*	*	*	*	2	A1A1H6
	5305-770-2579	..SCREW, MACHINE: MS51959-15 (96906)	EA	4	*	*	*	*	*	*	*	*	2	A1A1H4
P-F-S	5821-757-2804	...COUNTER, FREQUENCY: SMD550118 (70117)	EA	1	*	*	*	*	*	*	*	*	2	A1A1MP1
P--F	3020-763-2351	...GEAR, SPUR: SMC549762 (70117)	EA	1	*	*	2	*	*	2	10	4	2	A1A1MP2
	5305-206-2994	...SETSCREW: SMB550151-1 (70117)	EA	2	*	*	*	*	*	*	*	*	2	A1A1MP2H2
P--F	5821-757-2803	...GEARSHAFT, SPUR: SMB549750 (70117)	EA	1	*	*	2	*	*	2	10	4	2	A1A1MP3
X1		...GEARSHAFT, SPUR: SMC549799 (70117)	EA	1									2	A1A1MP4
MD-F		...INSULATOR, PLATE: SMB549741 (70117)	EA	2									2	A1A1E1
MD-F		...INSULATOR, PLATE: SMB549741 (70117)	EA	REF									2	A1A1E2
MD-F		...SPACER, SLEEVE: SMB549725-1 (70117)	EA	4									2	A1A1MP5
MD-F		...SPACER, SLEEVE: SMB549725-2 (70117)	EA	6									2	A1A1MP6
MD-F		...SPACER, SLEEVE: SMB549725-3 (70117)	EA	2									2	A1A1MP7
MD-F		...SPACER, SLEEVE: SMB549725-4 (70117)	EA	4									2	A1A1MP8
P--F	5930-786-3525	...SWITCH SECTION, ROTARY: SMC549981 (70117)	EA	1	*	2	2	*	2	2	19	10	2	A1A1S103C
P--F	5930-786-3511	...SWITCH SECTION, ROTARY: SMC550004 (70117)	EA	3	2	2	3	2	2	2	40	25	2	A1A1S103A
P--F	5930-786-3511	...SWITCH SECTION, ROTARY: SMC550004 (70117)	EA	REF	REF	REF	REF	REF	REF	REF	REF	REF	2	A1A1S103B
P--F	5930-786-3511	...SWITCH SECTION, ROTARY: SMC550004 (70117)	EA	REF	REF	REF	REF	REF	REF	REF	REF	REF	2	A1A1S104
P--F	5305-281-2628	...SCREW MACHINE:	EA	2	*	2	2	*	2	2	27	15	2	A1A1S104H2
P--F		...WASHER, FLAT:	EA	1	2	3	6	2	2	2	71	50	2	A1A1S104H1
P--F	5930-786-3526	...SWITCH SECTION, ROTARY: SMC550027 (70117)	EA	1	*	2	2	*	2	2	19	10	2	A1A1S103D
P--F	5930-757-2812	...SWITCH SECTION, ROTARY: SMC550032 (70117)	EA	1	*	2	2	*	2	2	19	10	2	A1A1S103E

(1) SMR CODE	(2) FEDERAL STOCK NUMBER	(3) DESCRIPTION REFERENCE NUMBER & MFR. CODE USABLE ON CODE	(4) UNIT OF MEAS	(5) QTY INC IN UNIT	(6) 30-DAY DS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(7) 30-DAY GS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(8) 1 YR ALW PER 100 EQUIP CNTGCY	(9) DEPOT MAINT ALW PER 100 EQUIP	(10) ILLUSTRATIONS (a) FIG NO.	(b) ITEM NO. OR REFERENCE DESIGNATION
	5310-281-9845	...NUT, PLAIN, HEXAGON: MS20365D440A (96906)	EA	2	REF	REF	REF	REF	REF	REF	REF	REF	2	A1A1S103EH2
P--F	5985-226-3402	...STUD, CONTINUOUS THREAD: SMB550059 (70117)	EA	2	*	2	2	*	2	2	12	5	2	A1A1S103EH2
P--F	5940-682-2477	...TERMINAL, LUG: 2104-04-01-2520 (78189)	EA	1	*	2	2	*	2	2	19	10	2	A1A1E3
P--F	5340-833-4234	..CLAMP, LOOP: HP2N (09922)	EA	1	*	2	2	*	2	2	12	5	2	A1MP1
P--F	5340-598-0383	..CLAMP, LOOP: HP4N (09922)	EA	1	*	2	2	*	2	2	12	5	2	A1MP2
P--F	5340-802-4706	..CLAMP, LOOP: HP5N (09922)	EA	1	*	2	2	*	2	2	12	5	2	A1MP3
P--F		..CLIP, SPRING TENSION: SMC549794 (70117)	EA	1	*	2	2	*	2	2	12	5	2	A1MP4
P--F	5935-984-2069	..CONNECTOR, RECEPTACLE: PT02A24-61P (77820)	EA	1	*	2	2	*	2	2	19	10	2	A1J101
	5310-271-4642	..NUT, PLAIN, HEXAGON: MS35649-44 (96906)	EA	3	*	*	*	*	*	*	*	*	2	A1J101H3
	5310-631-1302	..NUT, PLAIN, HEXAGON: MS35650-44 (96906)	EA	1	*	*	*	*	*	*	*	*	2	A1J101H1
	5305-054-5650	..SCREW, MACHINE: MS51957-16 (96906)	EA	3	*	*	*	*	*	*	*	*	2	A1J101H3
P--F		..SCREW, MACHINE: SMB550159-2 (70117)	EA	1	*	2	2	*	2	2	16	8	2	A1J101H1
P--F		..WASHER, FLAT: SMB550172-2 (70117)	EA	3	REF	REF	REF	REF	REF	REF	REF	REF	2	A1J101H3
	5310-559-7792	..WASHER, LOCK: AN936B4B (88044)	EA	4	*	*	*	*	*	*	*	*	2	A1J101H4
P--F	5330-580-1726	..GASKET: AN6227-8 (88044)	EA	4	2	4	8	2	2	2	101	75	2	A1MP5
P--O	5355-728-3157	..KNOB: SMB549800 (70117)	EA	1	*	2	2	*	2	2	12	5	2	A1MP6
	5305-079-6349	..SETSCREW: MS51053-413 (96906)	EA	2	*	*	*	*	*	*	*	*	2	A1MP6H2
P--O	5355-758-0115	..KNOB: SMB549801 (70117)	EA	2	*	2	2	*	2	2	27	15	2	A1MP7
	5305-079-6349	..SETSCREW: MS51053-413 (96906)	EA	1	REF	REF	REF	REF	REF	REF	REF	REF	2	A1MP7H1
P--O	5355-758-0115	..KNOB: SMB549801 (70117)	EA	REF	REF	REF	REF	REF	REF	REF	REF	REF	2	A1MP8
	5305-079-6349	..SETSCREW: MS51053-413 (96906)	EA	1	REF	REF	REF	REF	REF	REF	REF	REF	2	A1MP8H1
P--O	5355-965-4900	..KNOB: SMC549843 (70117)	EA	2	*	2	2	*	2	2	27	15	2	A1MP9
P--O	5305-206-5957	..SETSCREW: SMB550150 (70117)	EA	2	2	2	3	2	2	2	40	25	2	A1MP9H2
P--O	5355-965-4900	..KNOB: SMC549843 (70117)	EA	REF	REF	REF	REF	REF	REF	REF	REF	REF	2	A1MP10
P--O	5305-206-5957	..SETSCREW: SMB550150 (70117)	EA	2	REF	REF	REF	REF	REF	REF	REF	REF	2	A1MP10H2

(1) SMR CODE	(2) FEDERAL STOCK NUMBER	(3) DESCRIPTION REFERENCE NUMBER & MFR. CODE / USABLE ON CODE	(4) UNIT OF MEAS	(5) QTY INC IN UNIT	(6) 30-DAY DS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(7) 30-DAY GS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(8) 1 YR ALW PER 100 EQUIP CNTGCY	(9) DEPOT MAINT ALW PER 100 EQUIP	(10) ILLUSTRATIONS (a) FIG NO.	(b) ITEM NO. OR REFERENCE DESIGNATION
P--F	6210-824-5595	..LAMP BASE: 48327 (72619)	EA	2	*	2	2	*	2	2	19	10	2	A1XDS101
P--F	6210-824-5595	..LAMP BASE: 48327 (72619)	EA	REF	REF	REF	REF	REF	REF	REF	REF	REF	2	A1XDS102
P--O	6240-155-7836	..LAMP, INCANDESCENT: MS25237-327 (96906)	EA	4	4	11	20	2	3	5	242	200	2	A1DS101
P--O	6240-155-7836	..LAMP, INCANDESCENT: MS25237-327 (96906)	EA	REF	REF	REF	REF	REF	REF	REF	REF	REF	2	A1DS102
P--F	6210-691-5422	..LAMPHOLDER: 60327-13 (72619)	EA	2	*	2	2	*	2	2	19	10	2	A1E101
P--D		..LAMPHOLDER: 1614-13 (83564)	EA	2								*	2	A1E102
P--F		..NUT, SLEEVE: SMC549764-2 (70117)	EA	1	*	2	2	*	2	2	12	5	2	A1MP11
	5305-054-5648	..SCREW, MACHINE: MS51957-14 (96906)	EA	1	*	*	*	*	*	*	*	*	2	A1MP11H1
	5305-763-7822	..SCREW, MACHINE: MS51959-14 (96906)	EA	1	*	*	*	*	*	*	*	*	2	A1MP11H1
	5310-042-9609	..WASHER, LOCK: MS35338-78 (96906)	EA	1	*	*	*	*	*	*	*	*	2	A1MP11H1
P--F	5821-719-5431	..PANEL: SMD549917 (70117)	EA	1	*	*	*	*	*	*	5	2	2	A1MP12
	5305-717-8834	..SCREW, MACHINE: 3675-6R6-3735 (23651)	EA	2	*	*	*	*	*	*	*	*	2	A1MP12H2
X1-F		..PLATE ASSEMBLY: SMC549863 (70117)	EA	1									2	A1MP13
X1-F		..PLATE ASSEMBLY: SMD549880 (70117)	EA	1									2	A1MP14
	5305-763-7822	..SCREW, MACHINE: MS51959-14 (96906)	EA	2	REF	REF	REF	REF	REF	REF	REF	REF	2	A1MP14H2
X1-F		..PLATE ASSEMBLY: SMD549881 (70117)	EA	1									2	A1MP15
	5305-763-7822	..SCREW, MACHINE: MS51959-14 (96906)	EA	2	REF	REF	REF	REF	REF	REF	REF	REF	2	A1MP15H2
X1-F		..PLATE, COVER: SMC549752 (70117)	EA	2									2	A1MP16
	5305-770-2533	..SCREW, MACHINE: MS51959-13 (96906)	EA	20	*	*	*	*	*	*	*	*	2	A1MP16H20
MD-O		..PLATE, IDENTIFICATION: SMB550282-1 (70117)	EA	1									2	A1MP17
P--O		..SCREW, TAPPING: SMC504130 (70117)	EA	2	*	2	2	*	2	2	27	15	2	A1MP17H2
X1-F		..PLATE, REAR: SMD549874 (70117)	EA	1									2	A1MP18
	5305-054-5648	..SCREW, MACHINE: MS51957-14 (96906)	EA	4	REF	REF	REF	REF	REF	REF	REF	REF	2	A1MP18H4
	5310-042-9609	..WASHER, LOCK: MS35338-78 (96906)	EA	4	REF	REF	REF	REF	REF	REF	REF	REF	2	A1MP18H4
P--F	5905-806-0633	..RESISTOR, FIXED, COMPOSITION: RC07GF120J (81349)	EA	1	*	*	2	*	2	2	12	5	2	A1R104

(1) SMR CODE	(2) FEDERAL STOCK NUMBER	(3) DESCRIPTION REFERENCE NUMBER & MFR. CODE / USABLE ON CODE	(4) UNIT OF MEAS	(5) QTY INC IN UNIT	(6) 30-DAY DS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(7) 30-DAY GS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(8) 1 YR ALW PER 100 EQUIP CNTGCY	(9) DEPOT MAINT ALW PER 100 EQUIP	(10) ILLUSTRATIONS (a) FIG NO.	(b) ITEM NO. OR REFERENCE DESIGNATION
P--F	5905-686-3838	..RESISTOR, FIXED, COMPOSITION: RC07GF273J (81349)	EA	1	2	2	3	2	2	2	40	25	2	A1R102
P--F	5905-726-6435	..RESISTOR, FIXED, COMPOSITION: RC07GF331K (81349)	EA	1	2	3	5	2	2	2	53	35	2	A1R103
P--F	5905-762-2557	..RESISTOR, VARIABLE: SMB550165-2 (70117)	EA	1	*	2	2	*	2	2	12	5	2	A1R101
P--F		..NUT, PLAIN, HEXAGON: SMB550170 (70117)	EA	1	*	2	2	*	2	2	19	10	2	A1R101H1
	5310-261-7160	..WASHER, LOCK: 1214-05 (78189)	EA	1	*	*	*	*	*	*	*	*	2	A1R101H1
P--F	5930-757-4314	..SWITCH, ROTARY: SMC550101 (70117)	EA	1	*	2	2	*	2	2	19	10	2	A1S101
P--F		..NUT, PLAIN, HEXAGON:3/8-32 X 1/2 NIPL A140406-14 (37942)	EA	1	*	2	2	*	2	2	19	10	2	A1S101H1
	5310-595-7154	..WASHER, LOCK: 1720-02 (78189)	EA	1	*	*	*	*	*	*	*	*	2	A1S101H1
P--F	5930-757-4316	..SWITCH, ROTARY: SMC550102 (70117)	EA	1	*	2	2	*	2	2	19	10	2	A1S102
P--F		..NUT, PLAIN, HEXAGON: A140406-14 (37942)	EA	1	REF	REF	REF	REF	REF	REF	REF	REF	2	A1S102H1
	5310-595-7154	..WASHER, LOCK: 170-02 (78189)	EA	1	REF	REF	REF	REF	REF	REF	REF	REF	2	A1S102H1
P--F	5940-644-8722	..TERMINAL LUG: 4007-4 (77147)	EA	1	2	4	7	2	2	2	89	65	2	A1E1
		GROUP 02 MOUNTING												
P--O	5821-892-9309	.MOUNTING: MT1535ARC54 (80058)	EA	1	*	*	*	*	*	*	5	2	1	A2
X1-O		..BUSHING, SLEEVE: SMB549781 (70117)	EA	4										A2MP1
X1-O		..NUT, PLAIN, HEXAGON: MS20365-440A (96906)	EA	4										A2MP1H4
X1-O		..SCREW, MACHINE: MS51957-16 (96906)	EA	4										A2MP1H4
X1-O		..MOUNT, SHOCK: SMD550079 (70117)	EA	1										A2A1
X1-O		...GUIDE, BLOCK: SMC549700 (70117)	EA	1										A2A1MP1
X1-O		...SCREW, MACHINE: MS35216-23 (96906)	EA	2										A2A1MP1H2
X1-O		...GUIDE, BLOCK: SMC549806 (70117)	EA	1										A2A1MP2
X1-O		...SCREW, MACHINE: MS35216-23 (96906)	EA	2										A2A1MP2H2
X1-O		...LEAD, ELECTRICAL: 1-778-3 (81860)	EA	4										A2A1E1
X1-O		...NUT, PLAIN, HEXAGON: MS35649-64 (96906)	EA	8										A2A1E1H8
X1-O		...SCREW, MACHINE: MS35200-23 (96906)	EA	8										A2A1E1H8
X1-O		...WASHER, LOCK: MS35337-79 (96906)	EA	8										A2A1E1H8

(1) SMR CODE	(2) FEDERAL STOCK NUMBER	(3) DESCRIPTION REFERENCE NUMBER & MFR. CODE / USABLE ON CODE	(4) UNIT OF MEAS	(5) QTY INC IN UNIT	(6) 30-DAY DS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(7) 30-DAY GS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(8) 1 YR ALW PER 100 EQUIP CNTGCY	(9) DEPOT MAINT ALW PER 100 EQUIP	(10) ILLUSTRATIONS (a) FIG NO.	(b) ITEM NO. OR REFERENCE DESIGNATION
X1-0		...MOUNT, ISOLATOR: SMD549911 (70117)	EA	1										A2A1A1
X1-0		....MOUNT, RESILIENT: B218C5-5 (81860)	EA	4										A2A1A1MP1
X1-0		....TRAY: SMD549911-1 (70117)	EA	1										A2A1A1MP2
X1-0		...PLATE: SMB549746 (70117)	EA	2										A2A1MP3
X1-0		...PLATE ASSEMBLY: SMC549848 (70117)	EA	1										A2A1A2
X1-0		...NUT, PLAIN, HEXAGON: MS20365D632A (96906)	EA	6										A2A1A2H6
X1-0		...SCREW, MACHINE: MS35200-29 (96906)	EA	6										A2A1A2H6
X1-0		....CLIP, SPRING TENSION: SMB549888 (70117)	EA	1										A2A1A2MP1
X1-0		....RIVET, TUBULAR: MS1635-60 (96906)	EA	1										A2A1A2MP1H1
X1-0		....PIN, SPRING: MS16562-223 (96906)	EA	2										A2A1A2MP2
X1-0		....PLATE: SMC549848-1 (70117)	EA	1										A2A1A2MP3
X1-0		....ROLLER: SMC549848-2 (70117)	EA	2										A2A1A2MP4
X1-0		...PLATE MOUNTING: SMD549701 (70117)	EA	1										A2A1MP4
X1-0		..PLATE, IDENTIFICATION: SMB550283-1 (70117)	EA	1									1	A2MP2
	5310-595-7468	..NUT, SELF-LOCKING: 22NM26 (72962)	EA	2	*	2	2	*	2	2	19	10	1	A2MP2H2
	5305-764-2964	..SCREW, MACHINE: MS51959-4 (96906)	EA	2	*	2	2	*	2	2	27	15	1	A2MP2H2
		GROUP 03 RECEIVER-TRANSMITTER, RADIO												
		RF AMPLIFIER ASSEMBLY:	EA	1										
	5305-764-0071	..SCREW, MACHINE: MS51959-47 (96906)	EA	5	*	*	*	*	*	*	*	*	3	A3A1H5
	5340-695-2558	..SLEEVE: SMB549943 (70117)	EA	5	*	*	*	*	*	*	*	*	3	A3A1H5
P--H-S	5821-226-4266	...MECHANICAL DRIVE ASSEMBLY: SMD549671 (70117)	EA	1				*	*	*	4	1	4	A3A1A1
	5305-637-5884	...SCREW, MACHINE: MS35214-12 (96906)	EA	2				*	*	*	*	*	4	A3A1A1H2
	5305-763-7828	...SCREW, MACHINE: MS51959-20 (96906)	EA	3				*	*	*	*	*	4	A3A1A1H3
P--H		...SETSCREW: 4-48 X 3/16 SMB550151-2 (70117)	EA	3				2	2	2	77	55	4	A3A1A1H3
X1-H		....BRACKET: SMC549810 (70117)	EA	1										A3A1A1MP1

(1) SMR CODE	(2) FEDERAL STOCK NUMBER	(3) DESCRIPTION REFERENCE NUMBER & MFR. CODE / USABLE ON CODE	(4) UNIT OF MEAS	(5) QTY INC IN UNIT	(6) 30-DAY DS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(7) 30-DAY GS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(8) 1 YR ALW PER 100 EQUIP CNTGCY	(9) DEPOT MAINT ALW PER 100 EQUIP	(10) ILLUSTRATIONS (a) FIG NO.	(b) ITEM NO. OR REFERENCE DESIGNATION
	5305-054-5649	....SCREW, MACHINE: MS51957-15 (96906)	EA	4				*	*	*	*	*	5	A3A1A1MP1H4
A--H		....BRACKET ASSEMBLY: SMC550050 (70117)	EA	1									5	A3A1A1A1
MD-H		.....BRACKET: SMC550050-1 (70117)	EA	1									5	A3A1A1A1MP1
P--H	5340-894-0686	.....CLIP, SPRING TENSION: 6007-3A (91506)	EA	1				*	2	2	12	5	5	A3A1A1A1MP2
	5320-587-3704	.....RIVET, TUBULAR: R3484X3-32CADPL (12014)	EA	1				*	*	*	*	*	5	A3A1A1A1MP2H1
A--H		....CABLE ASSEMBLY: 516-2557-001 (13499)	EA	1									5	A3A1A1W1
	5310-271-4642	....NUT, PLAIN HEXAGON: MS35649-44 (96906)	EA	2				REF	REF	REF	REF	REF	5	A3A1A1W1H2
	5305-054-5650	....SCREW, MACHINE: MS51957-16 (96906)	EA	2				REF	REF	REF	REF	REF	5	A3A1A1W1H2
P--H	5935-989-0294	.....CONNECTOR, PLUG: 231-25-21-106 (71785)	EA	1				*	2	2	19	10	5	A3A1A1W1P701
P--H	5821-891-9485	....COLLAR, SHAFT: SMB549726-2 (70117)	EA	2				*	2	2	12	5	5	A3A1A1MP2
	5305-899-1962	....SETSCREW: SMB550147 (70117)	EA	2				*	*	*	*	*	5	A3A1A1MP2H2
P--H	5821-891-9485	....COLLAR, SHAFT: SMB549726-2 (70117)	EA	REF				REF	REF	REF	REF	REF	5	A3A1A1MP3
	5305-899-1962	....SETSCREW: SMB550147 (70117)	EA	2				REF	REF	REF	REF	REF	5	A3A1A1MP3H2
P--H	5821-891-9441	....CONTACT, ELECTRICAL: SMC549893 (70117)	EA	4				*	2	2	27	15	5	A3A1A1E1
	5310-271-4642	....NUT, PLAIN, HEXAGON: MS35649-44 (96906)	EA	4				REF	REF	REF	REF	REF	5	A3A1A1E1H4
	5305-054-5651	....SCREW, MACHINE: MS51957-17 (96906)	EA	4				*	*	*	*	*	5	A3A1A1E1H4
P--H	5355-073-8564	....DIAL, CONTROL: SMB549914-1 (70117)	EA	1				*	*	*	4	1	5	A3A1A1MP4
	5305-054-5637	....SCREW, MACHINE: MS51957-3 (96906)	EA	1				*	*	*	*	*	5	A3A1A1MP4H1
P--H		....WASHER, FLAT: SMB550172-1 (70117)	EA	1				2	2	3	130	100	5	A3A1A1MP4H1
	5310-058-2950	....WASHER, LOCK: MS35337-77 (96906)	EA	1				*	*	*	*	*	5	A3A1A1MP4H1
P--H	5355-073-8482	....DIAL, CONTROL: SMB549914-2 (70117)	EA	1				*	*	*	4	1	5	A3A1A1MP5
	5305-054-5637	....SCREW, MACHINE: MS51957-3 (96906)	EA	1				REF	REF	REF	REF	REF	5	A3A1A1MP5H1
P--H		....WASHER, FLAT: SMB550172-1 (70117)	EA	1				REF	REF	REF	REF	REF	5	A3A1A1MP5H1
	5310-058-2950	....WASHER, LOCK: MS35337-77 (96906)	EA	1				REF	REF	REF	REF	REF	5	A3A1A1MP5H1
P--H	5821-073-3261	....DRIVE ASSEMBLY: SMD549686 (70117)	EA	1				*	*	*	5	2	5	A3A1A1A2

(1) SMR CODE	(2) FEDERAL STOCK NUMBER	(3) DESCRIPTION REFERENCE NUMBER & MFR. CODE / USABLE ON CODE	(4) UNIT OF MEAS	(5) QTY INC IN UNIT	(6) 30-DAY DS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(7) 30-DAY GS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(8) 1 YR ALW PER 100 EQUIP CNTGCY	(9) DEPOT MAINT ALW PER 100 EQUIP	(10) ILLUSTRATIONS (a) FIG NO.	(b) ITEM NO. OR REFERENCE DESIGNATION
X1-H		.....BEARING: SMC549937-1 (70117)	EA	2										A3A1A1A2MP1
X1-H		.....BEARING: SMC549937-1 (70117)	EA	REF										A3A1A1A2MP2
X1-H		.....BEARING: SMC549937-2 (70117)	EA	3										A3A1A1A2MP3
X1-H		.....BEARING: SMC549937-2 (70117)	EA	REF										A3A1A1A2MP4
X1-H		.....BEARING: SMC549937-2 (70117)	EA	REF										A3A1A1A2MP5
X1-H		.....BEARING: SMC549937-3 (70117)	EA	5										A3A1A1A2MP6
X1-H		.....BEARING: SMC549937-3 (70117)	EA	REF										A3A1A1A2MP7
X1-H		.....BEARING: SMC549937-3 (70117)	EA	REF										A3A1A1A2MP8
X1-H		.....BEARING: SMC549937-3 (70117)	EA	REF										A3A1A1A2MP9
X1-H		.....BEARING: SMC549937-3 (70117)	EA	REF										A3A1A1A2MP10
X1-H		.....BEARING: SR144PP (83086)	EA	2										A3A1A1A2MP11
X1-H		.....BEARING: SR144PP (83086)	EA	REF										A3A1A1A2MP12
X1-H		.....BEARING: SR155PP (83086)	EA	1										A3A1A1A2MP13
X1-H		.....BEARING: SR156PP (83086)	EA	1										A3A1A1A2MP14
X1-H		.....CAM: SMD549826 (70117)	EA	1										A3A1A1A2MP15
X1-H		.....SETSCREW: MS51053-102 (96906)	EA	1										A3A1A1A2MP15H1
X1-H		.....CLUTCH ASSEMBLY: SMD549836 (70117)	EA	2										A3A1A1A2A1
X1-H		.....DISK, CLUTCH: SMC550049 (70117)	EA	3										A3A1A1A2A1MP1
X1-H		.....GEAR, SPUR: SMC549871 (70117)	EA	2										A3A1A1A2A1MP2
X1-H		.....GEAR, SPUR: SMC549871 (70117)	EA	REF										A3A1A1A2A1MP3
X1-H		.....NUT, PLAIN, HEXAGON: SMB549782 (70117)	EA	1										A3A1A1A2A1MP3H1
X1-H		.....STOP ASSEMBLY: SMC549832 (70117)	EA	1										A3A1A1A2A1A1
X1-H		.....DISK: SMC549857 (70117)	EA	1										A3A1A1A2A1A1MP1
X1-H		.....PIN, STRAIGHT, HEADLESS: MS35672-2 (96906)	EA	1										A3A1A1A2A1A1H1
X1-H		.....SHAFT, STRAIGHT: SMD549706 (70117)	EA	1										A3A1A1A2A1A1MP2

(1) SMR CODE	(2) FEDERAL STOCK NUMBER	(3) DESCRIPTION REFERENCE NUMBER & MFR. CODE / USABLE ON CODE	(4) UNIT OF MEAS	(5) QTY INC IN UNIT	(6) 30-DAY DS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(7) 30-DAY GS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(8) 1 YR ALW PER 100 EQUIP CNTGCY	(9) DEPOT MAINT ALW PER 100 EQUIP	(10) ILLUSTRATIONS (a) FIG NO.	(b) ITEM NO. OR REFERENCE DESIGNATION
X1-H		.....WASHER, KEY: SMB549742 (70117)	EA	1										A3A1A1A2A1H1
X1-H		.....WASHER, KEYWAY: SMB549760 (70117)	EA	2										A3A1A1A2A1H2
X1-H		.....WASHER, SPRING TENSION: SMB549748 (70117)	EA	1										A3A1A1A2A1H3
X1-H		.....CLUTCH ASSEMBLY: SMD549836 (70117)	EA	REF										A3A1A1A2A2
X1-H		.....DISK, CLUTCH: SMC550049 (70117)	EA	3										A3A1A1A2A2MP1
X1-H		.....GEAR, SPUR: SMC549871 (70117)	EA	2										A3A1A1A2A2MP2
X1-H		.....GEAR, SPUR: SMC549871 (70117)	EA	REF										A3A1A1A2A2MP3
X1-H		.....NUT, PLAIN, HEXAGON: SMB549782 (70117)	EA	1										A3A1A1A2A2MP3H1
X1-H		.....STOP ASSEMBLY: SMC549832 (70117)	EA	1										A3A1A1A2A2A1
X1-H		.....DISK: SMC549857 (70117)	EA	1										A3A1A1A2A2A1MP1
X1-H		.....PIN, STRAIGHT, HEADLESS: MS35672-2 (96906)	EA	1										A3A1A1A2A2A1H1
X1-H		.....SHAFT, STRAIGHT: SMD549706 (70117)	EA	1										A3A1A1A2A2A1MP2
X1-H		.....WASHER, KEY: SMB549742 (70117)	EA	1										A3A1A1A2A2H1
X1-H		.....WASHER, KEYWAY: SMB549760 (70117)	EA	2										A3A1A1A2A2H2
X1-H		.....WASHER, SPRING TENSION: SMB549748 (70117)	EA	1										A3A1A1A2A2H3
X1-H		.....COLLAR, SHAFT: SMB549756 (70117)	EA	2										A3A1A1A2MP16
X1-H		.....SETSCREW: MS51053-102 (96906)	EA	1										A3A1A1A2MP16H1
X1-H		.....COLLAR, SHAFT: SMB549756 (70117)	EA	REF										A3A1A1A2MP17
X1-H		.....SETSCREW: MS51053-102 (96906)	EA	1										A3A1A1A2MP17H1
X1-H		.....GEAR, SPUR: SMC549729 (70117)	EA	1										A3A1A1A2MP18
X1-H		.....SETSCREW: MS51053-102 (96906)	EA	1										A3A1A1A2MP18H1
X1-H		.....GEARSHAFT: SMD549824 (70117)	EA	1										A3A1A1A2MP19
X1-H		.....GEARSHAFT, BEVEL: SMD549709 (70117)	EA	1										A3A1A1A2MP20
X1-H		.....GEARSHAFT, BEVEL: SMD549819 (70117)	EA	1										A3A1A1A2MP21
X1-H		.....PIN, GROOVE HEAD: SMB549787 (70117)	EA	1										A3A1A1A2H1

(1) SMR CODE	(2) FEDERAL STOCK NUMBER	(3) DESCRIPTION REFERENCE NUMBER & MFR. CODE / USABLE ON CODE	(4) UNIT OF MEAS	(5) QTY INC IN UNIT	(6) 30-DAY DS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(7) 30-DAY GS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(8) 1 YR ALW PER 100 EQUIP CNTGCY	(9) DEPOT MAINT ALW PER 100 EQUIP	(10) ILLUSTRATIONS (a) FIG NO.	(b) ITEM NO. OR REFERENCE DESIGNATION
X1-H		.....PIN, SPRING: MS16562-192 (96906)	EA	4										A3A1A1A2H2
X1-H		.....PIN, STRAIGHT HEAD: SMC549791 (70117)	EA	1										A3A1A1A2H3
X1-H		.....PLATE ASSEMBLY: SMD550120 (70117)	EA	1										A3A1A1A2A3
X1-H		.....FRAME, MATCHED SET: SMD549879 (70117)	EA	1										A3A1A1A2A3A1
X1-H		.....FRAME: SMD549879-1 (70117)	EA	1										A3A1A1A2A3A1MP1
X1-H		.....NUT, CAPTIVE: SMB549900 (70117)	EA	1										A3A1A1A2A3A1H1
X1-H		.....INSERT, SCREW THREAD: MS21209-00420 (96906)	EA	2										A3A1A1A2A3H1
X1-H		.....NUT, CLINCH: 68NC4-40 (72962)	EA	1										A3A1A1A2A3H2
X1-H		.....PIN, STRAIGHT, HEADLESS: MS16555-602 (96906)	EA	4										A3A1A1A2A3H3
X1-H		.....PLATE: SMC549882 (70117)	EA	1										A3A1A1A2A3MP1
X1-H		.....SCREW, MACHINE: MS51959-4 (96906)	EA	2										A3A1A1A2A3MP1H2
X1-H		.....SCREW, MACHINE: SMB550156-2 (70117)	EA	2										A3A1A1A2A3MP1H2
X1-H		.....SUPPORT: SMC549886 (70117)	EA	1										A3A1A1A2A3MP2
X1-H		.....NUT, PLAIN, HEXAGON: 313-0132-00 (13499)	EA	1										A3A1A1A2A3MP2H1
X1-H		.....SCREW, MACHINE: MS51957-20 (96906)	EA	1										A3A1A1A2A3MP2H1
X1-H		.....SCREW, MACHINE: MS51957-21 (96906)	EA	1										A3A1A1A2A3MP2H1
X1-H		.....WASHER, FLAT: SMB550172-2 (70117)	EA	2										A3A1A1A2A3MP2H2
X1-H		.....WASHER, LOCK: MS35337-38 (96906)	EA	2										A3A1A1A2A3MP2H2
X1-H		.....POST, ELECTRICAL: SMB549757 (70117)	EA	1										A3A1A1A2MP22
X1-H		.....SCREW, MACHINE: MS51957-2 (96906)	EA	1										A3A1A1A2MP22H1
X1-H		.....WASHER, LOCK: MS35337-77 (96906)	EA	1										A3A1A1A2MP22H1
X1-H		.....SOLENOID ASSEMBLY: SMC549833-1 (70117)	EA	1										A3A1A1A2A4
X1-H		.....SCREW MACHINE: MS51957-13 (96906)	EA	3										A3A1A1A2A4H3
X1-H		.....WASHER, LOCK: MS35337-78 (96906)	EA	3										A3A1A1A2A4H3
X1-H		.....COIL, SOLENOID: SMC550048 (70117)	EA	1										A3A1A1A2A4K702

(1) SMR CODE	(2) FEDERAL STOCK NUMBER	(3) DESCRIPTION REFERENCE NUMBER & MFR. CODE / USABLE ON CODE	(4) UNIT OF MEAS	(5) QTY INC IN UNIT	(6) 30-DAY DS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(7) 30-DAY GS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(8) 1 YR ALW PER 100 EQUIP CNTGCY	(9) DEPOT MAINT ALW PER 100 EQUIP	(10) ILLUSTRATIONS (a) FIG NO.	(b) ITEM NO. OR REFERENCE DESIGNATION
X1-H		.....PLATE, STOP: SMC549834-1 (70117)	EA	1										A3A1A1A2A4MP1
X1-H		.....SCREW, EXTERNAL RELIEF: SMB549718 (70117)	EA	2										A3A1A1A2A4MP1H2
X1-H		.....SHELL, SOLENOID: SMC549931 (70117)	EA	1										A3A1A1A2A4MP2
X1-H		.....SOLENOID ASSEMBLY: SMC549833-2 (70117)	EA	1										A3A1A1A2A5
X1-H		.....SCREW, MACHINE: MS51957-13 (96906)	EA	3										A3A1A1A2A5H3
X1-H		.....WASHER, LOCK: MS35337-78 (96906)	EA	3										A3A1A1A2A5H3
X1-H		.....COIL, SOLENOID: SMC550048 (70117)	EA	1										A3A1A1A2A5K701
X1-H		.....PLATE, STOP: SMC549834-2 (70117)	EA	1										A3A1A1A2A5MP1
X1-H		.....SCREW, EXTERNAL RELIEF: SMB549718 (70117)	EA	2										A3A1A1A2A5MP1H2
X1-H		.....SHELL, SOLENOID: SMC549931 (70117)	EA	1										A3A1A1A2A5MP2
X1-H		.....SHAFT, SHOULDER: SMB549778 (70117)	EA	2										A3A1A1A2MP23
X1-H		.....SPACER, RING: SMB549754 (70117)	EA	2										A3A1A1A2MP24
X1-H		.....SHAFT, SHOULDER: SMB549779 (70117)	EA	1										A3A1A1A2MP25
X1-H		.....SPRING, HELICAL, COMPRESSION: SMB549831-2 (70117)	EA	1										A3A1A1A2MP26
X1-H		.....SPRING, HELICAL COMPRESSION: SMB549831-4 (70117)	EA	2										A3A1A1A2MP27
X1-H		.....SPRING, HELICAL, EXTENSION: SMB549826 (70117)	EA	1										A3A1A1A2MP28
X1-H		.....WASHER, SPACER: SMB549742-1 (70117)	EA	1										A3A1A1A2H4
X1-H		.....WASHER, SPACER: SMB549742-2 (70117)	EA	1										A3A1A1A2H5
X1-H		.....WASHER, SPACER: SMB549742-3 (70117)	EA	1										A3A1A1A2H6
X1-H		.....WASHER, SPACER: SMB549742-4 (70117)	EA	1										A3A1A1A2H7
X1-H		.....WASHER, SPACER: SMB549742-5 (70117)	EA	1										A3A1A1A2H8
X1-H		.....YOKE ASSEMBLY: SMC550078 (70117)	EA	1										A3A1A1A2A6
X1-H		.....BLOCK, HOUSING: SMC549795 (70117)	EA	1										A3A1A1A2A6MP1
X1-H		.....PLATE, MOUNTING: SMC549793-1 (70117)	EA	1										A3A1A1A2A6MP2
X1-H		.....SCREW, MACHINE: MS51959-3 (96906)	EA	4										A3A1A1A2A6MP2H4

(1) SMR CODE	(2) FEDERAL STOCK NUMBER	(3) DESCRIPTION REFERENCE NUMBER & MFR. CODE / USABLE ON CODE	(4) UNIT OF MEAS	(5) QTY INC IN UNIT	(6) 30-DAY DS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(7) 30-DAY GS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(8) 1 YR ALW PER 100 EQUIP CNTGCY	(9) DEPOT MAINT ALW PER 100 EQUIP	(10) ILLUSTRATIONS (a) FIG NO.	(b) ITEM NO. OR REFERENCE DESIGNATION
XI-H		.....PLATE, MOUNTING: SMC549793-2 (70117)	EA	1										A3A1A1A2A6MP3
XI-H		.....SCREW, MACHINE: MS51959-3 (96906)	EA	4										A3A1A1A2A6MP3H4
XI-H		.....PIN, STRAIGHT, HEADLESS: MS16555-617 (96906)	EA	4										A3A1A1A2A6MP3H4
P--H	2920-073-3260	....GEAR ASSEMBLY: SMD550123 (70117)	EA	1				*	2	2	12	5	5	A3A1A1A3
	5305-054-5647	....SCREW, MACHINE: MS51957-13 (96906)	EA	1				*	*	*	*	*	5	A3A1A1A3H1
MD-H		....INSULATOR, PLATE: SMB549798-1 (70117)	EA	2									5	A3A1A1E2
MD-H		....INSULATOR, PLATE: SMB549798-1 (70117)	EA	REF									5	A3A1A1E3
MD-H		....INSULATOR, PLATE: SMB549798-2 (70117)	EA	6									5	A3A1A1E4
MD-H		....INSULATOR, PLATE: SMB549798-2 (70117)	EA	REF									5	A3A1A1E5
MD-H		....INSULATOR, PLATE: SMB549798-2 (70117)	EA	REF									5	A3A1A1E6
MD-H		....INSULATOR, PLATE: SMB549798-2 (70117)	EA	REF									5	A3A1A1E7
MD-H		....INSULATOR, PLATE: SMB549798-2 (70117)	EA	REF									5	A3A1A1E8
MD-H		....INSULATOR, PLATE: SMB549798-2 (70117)	EA	REF									5	A3A1A1E9
P--H	6240-179-1811	....LAMP, GLOW: NE2 (08108)	EA	1				2	2	3	130	100	5	A3A1A1DS701
MD-H		....MARKER, DIAL: SMC549859 (70117)	EA	2									5	A3A1A1MP6
	5310-271-4640	....NUT, PLAIN, HEXAGON: MS35649-24 (96906)	EA	4				*	*	*	*	*	5	A3A1A1MP6H4
	5305-054-5637	....SCREW, MACHINE: MS51957-3 (96906)	EA	4				REF	REF	REF	REF	REF	5	A3A1A1MP6H4
P--H		....WASHER, FLAT: SMB550172-1 (70117)	EA	8				REF	REF	REF	REF	REF	5	A3A1A1MP6H8
P--H	6105-226-4632	....MOTOR, DC: 0905-23 (16636)	EA	1				*	2	2	12	5	5	A3A1A1B701
	5305-988-1168	....SCREW, MACHINE: MS35206-210 (96906)	EA	2				*	*	*	*	*	5	A3A1A1B701H2
	5310-722-5652	....WASHER, LOCK: MS35338-77 (96906)	EA	2				*	*	*	*	*	5	A3A1A1B701H2
P--H	5945-854-8546	....RELAY, ARMATURE: 3SAF1241 (01526)	EA	1				2	2	2	40	25	5	A3A1A1K703
	5310-271-4642	....NUT, PLAIN, HEXAGON: MS35649-44 (96906)	EA	2				REF	REF	REF	REF	REF	5	A3A1A1K703H2
P--H	5961-842-8797	....SEMICONDUCTOR, DIODE: 1N3034B (81349)	EA	2				*	2	2	13	6	5	A3A1A1CR702
P--H	5961-842-8797	....SEMICONDUCTOR, DIODE: 1N3034B (81349)	EA	REF				REF	REF	REF	REF	REF	5	A3A1A1CR703

(1) SMR CODE	(2) FEDERAL STOCK NUMBER	(3) DESCRIPTION REFERENCE NUMBER & MFR. CODE USABLE ON CODE	(4) UNIT OF MEAS	(5) QTY INC IN UNIT	(6) 30-DAY DS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(7) 30-DAY GS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(8) 1 YR ALW PER 100 EQUIP CNTGCY	(9) DEPOT MAINT ALW PER 100 EQUIP	(10) ILLUSTRATIONS (a) FIG NO.	(b) ITEM NO. OR REFERENCE DESIGNATION
P--H	5961-811-8372	....SEMICONDUCTOR, DIODE: 1N3189 (81349)	EA	1				2	2	2	33	20	5	A3A1A1CR701
MD-H		....SPACER, SLEEVE: SMB549776 (70117)	EA	4									5	A3A1A1MP7
P--H	5930-073-3222	....SWITCH ASSEMBLY: SMD549878 (70117)	EA	1				*	2	2	19	10	5	A3A1A1S702
	5305-054-5647	....SCREW, MACHINE: MS51957-13 (96906)	EA	2				REF	REF	REF	REF	REF	5	A3A1A1S702H2
X1-H		.....GEARSHAFT, SPUR: SMB549902 (70117)	EA	1										A3A1A1S702MP1
X1-H		.....GEARSHAFT, SPUR: SMB549903 (70117)	EA	1										A3A1A1S702MP2
X1-H		.....GEARSHAFT, SPUR: SMB549905 (70117)	EA	1										A3A1A1S702MP3
X1-H		.....INSULATOR PLATE: SMB549741 (70117)	EA	2										A3A1A1S702E1
X1-H		.....INSULATOR PLATE: SMB549741 (70117)	EA	REF										A3A1A1S702E2
X1-H		.....NUT, SLEEVE: SMC549915 (70117)	EA	2										A3A1A1S702H1
X1-H		.....SCREW, MACHINE: SMB550161 (70117)	EA	2										A3A1A1S702H1H2
X1-H		.....SPACER, SLEEVE: SMB549722-1 (70117)	EA	2										A3A1A1S702MP4
X1-H		.....SPACER, SLEEVE: SMB549722-2 (70117)	EA	6										A3A1A1S702MP5
X1-H		.....SWITCH SECTION, ROTARY: SMC550001 (70117)	EA	1										A3A1A1S702C
X1-H		.....SWITCH SECTION, ROTARY: SMC550004 (70117)	EA	1										A3A1A1S702A
X1-H		.....SWITCH SECTION, ROTARY: SMC550027 (70117)	EA	1										A3A1A1S702B
X1-H		.....TERMINAL LUG: SMB550042-1 (70117)	EA	1										A3A1A1S702E3
X1-H		.....NUT, SELF-LOCKING: 22NM26 (72962)	EA	1										A3A1A1S702E3H1
X1-H		.....SCREW, MACHINE: MS35206-206 (96906)	EA	1										A3A1A1S702E3H1
X1-H		.....TERMINAL STUD: SMB549953 (70117)	EA	1										A3A1A1S702E4
X1-H		.....SCREW, MACHINE: MS51957-5 (96906)	EA	1										A3A1A1S702E4H1
P--H	5930-073-3220	....SWITCH ASSEMBLY: SMD549918 (70117)	EA	1				*	2	2	19	10	5	A3A1A1S701
	5305-054-5647	....SCREW, MACHINE: MS51957-13 (96906)	EA	2				REF	REF	REF	REF	REF	5	A3A1A1S701H2
X1-H		.....GEARSHAFT, SPUR: SMB549904 (70117)	EA	1										A3A1A1S701MP1
X1-H		.....GEARSHAFT, SPUR: SMC549765 (70117)	EA	1										A3A1A1S701MP2

(1) SMR CODE	(2) FEDERAL STOCK NUMBER	(3) DESCRIPTION REFERENCE NUMBER & MFR. CODE / USABLE ON CODE	(4) UNIT OF MEAS	(5) QTY INC IN UNIT	(6) 30-DAY DS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(7) 30-DAY GS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(8) 1 YR ALW PER 100 EQUIP CNTGCY	(9) DEPOT MAINT ALW PER 100 EQUIP	(10) ILLUSTRATIONS (a) FIG NO.	(b) ITEM NO. OR REFERENCE DESIGNATION
X1-H		.....GEARSHAFT, SPUR: SMC549905 (70117)	EA	1										A3A1A1S701MP3
X1-H		.....INSULATOR PLATE: SMB549741 (70117)	EA	2										A3A1A1S701E1
X1-H		.....INSULATOR PLATE: SMB549741 (70117)	EA	REF										A3A1A1S701E2
X1-H		.....NUT, SLEEVE: SMC549915 (70117)	EA	2										A3A1A1S701H1
X1-H		.....SCREW, MACHINE: SMB550161 (70117)	EA	2										A3A1A1S701H1H2
X1-H		.....SPACER, SLEEVE: SMB549722-1 (70117)	EA	2										A3A1A1S701MP4
X1-H		.....SPACER, SLEEVE: SMB549722-2 (70117)	EA	6										A3A1A1S701MP5
X1-H		.....SWITCH SECTION, ROTARY: SMC550001 (70117)	EA	1										A3A1A1S701C
X1-H		.....SWITCH SECTION, ROTARY: SMC550004 (70117)	EA	1										A3A1A1S701A
X1-H		.....SWITCH SECTION, ROTARY: SMC550027 (70117)	EA	1										A3A1A1S701B
X1-H		.....TERMINAL LUG: SMB550042-1 (70117)	EA	1										A3A1A1S701E3
X1-H		.....NUT, SELF-LOCKING: 22NM26 (72962)	EA	1										A3A1A1S701E3H1
X1-H		.....SCREW, MACHINE: MS35206-206 (96906)	EA	1										A3A1A1S701E3H1
X1-H		.....TERMINAL STUD: SMB549953 (70117)	EA	3										A3A1A1S701E4
X1-H		.....SCREW, MACHINE: MS51957-5 (96906)	EA	3										A3A1A1S701E4H3
P--H	5940-878-3768	....TERMINAL LUG: 4007-6 (77147)	EA	1				*	2	2	19	10	5	A3A1A1E10
	5305-054-5647	....SCREW, MACHINE: MS51957-13 (96906)	EA	1				REF	REF	REF	REF	REF	5	A3A1A1E10H1
	5310-054-5647	....WASHER, LOCK: AN936B4B (88044)	EA	1				REF	REF	REF	REF	REF	5	A3A1A1E10H1
PH-F-S	5821-728-3642	...POWER AMPLIFIER: SMD549672 (70117)	EA	1				*	*	*	5	2	4	A3A1A2
	5305-207-7466	...SCREW, MACHINE: MS35214-13 (96906)	EA	3				*	*	*	*	*	4	A3A1A2H3
	5305-763-7827	...SCREW, MACHINE: MS51959-18 (96906)	EA	3				*	*	*	*	*	4	A3A1A2H3
P--H		...SET SCREW: SMB550151-2 (70117)	EA	1				REF	REF	REF	REF	REF	4	A3A1A2H1
MD-H		....BRACKET: SMB549790 (70117)	EA	1									8	A3A1A2MP1
	5305-727-8833	....SCREW, MACHINE: MS51957-3 (96906)	EA	4				REF	REF	REF	REF	REF	8	A3A1A2MP1H4
P--D	5821-728-3274	....CAPACITOR ASSEMBLY: SMD549929 (70117)	EA	1								5	6	A3A1A2A1

(1) SMR CODE	(2) FEDERAL STOCK NUMBER	(3) DESCRIPTION REFERENCE NUMBER & MFR. CODE / USABLE ON CODE	(4) UNIT OF MEAS	(5) QTY INC IN UNIT	(6) 30-DAY DS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(7) 30-DAY GS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(8) 1 YR ALW PER 100 EQUIP CNTGCY	(9) DEPOT MAINT ALW PER 100 EQUIP	(10) ILLUSTRATIONS (a) FIG NO.	(b) ITEM NO. OR REFERENCE DESIGNATION
	5305-054-5646	....SCREW, MACHINE: MS51957-12 (96906)	EA	5				*	*	*	*	*	6	A3A1A2A1H5
P--H	5821-757-2796	.....CAM, LEFT HAND: SMD550175-1 (70117)	EA	1				*	2	2	19	10	8	A3A1A2A1MP1
X1-H		.....CAM, RIGHT HAND: SMD550175-2 (70117)	EA	1									8	A3A1A2A1MP2
P--H	5910-731-9659	.....CAPACITOR, VARIABLE: SMD550104 (70117)	EA	1				*	2	2	12	5	8	A3A1A2A1C805A-C
P--D		.....COIL ASSEMBLY: SMD549849 (70117)	EA	1								8	6	A3A1A2A1A1
P--H		.....SCREW, MACHINE: SMB550155-1 (70117)	EA	4				2	2	2	46	30	6	A3A1A2A1A1H4
	5305-054-5635	.....SCREW, MACHINE: MS51957-1 (96906)	EA	2				*	*	*	*	*	6	A3A1A2A1A1H2
P--H	5910-838-8947	......CAPACITOR, FIXED, MICA: DM19F152K03 (84171)	EA	3				*	2	2	27	15	6	A3A1A2A1A1C806
P--H	5910-838-8947	......CAPACITOR, FIXED, MICA: DM19F152K03 (84171)	EA	REF				REF	REF	REF	REF	REF	6	A3A1A2A1A1C811
P--H	5910-838-8947	......CAPACITOR, FIXED, MICA: DM19F152K03 (84171)	EA	REF				REF	REF	REF	REF	REF	6	A3A1A2A1A1C817
P--H	5910-649-7756	......CAPACITOR, VARIABLE: VC22G (73899)	EA	3				*	2	2	27	15	6	A3A1A2A1A1C804
P--H	5910-649-7756	......CAPACITOR, VARIABLE: VC22G (73899)	EA	REF				REF	REF	REF	REF	REF	6	A3A1A2A1A1C812
P--H	5910-649-7756	......CAPACITOR, VARIABLE: VC22G (73899)	EA	REF				REF	REF	REF	REF	REF	6	A3A1A2A1A1C816
P--H	5950-728-5169	......COIL ASSEMBLY: SMD549877-1 (70117)	EA	2				*	2	2	27	15	6	A3A1A2A1A1L801
P--H	5950-728-5169	......COIL ASSEMBLY: SMD549877-1 (70117)	EA	REF				REF	REF	REF	REF	REF	6	A3A1A2A1A1L802
P--H	5950-728-5168	......COIL ASSEMBLY: SMD549877-2 (70117)	EA	1				*	2	2	16	8	6	A3A1A2A1A1L803
P--H	5950-054-9131	......COIL, RF: MS75008-35 (96906)	EA	1				*	2	2	27	15	6	A3A1A2A1A1L805
P--H	5935-973-0558	......CONNECTOR, RECEPTACLE: 31-50 (98278)	EA	1				2	2	2	33	20	6	A3A1A2A1A1J801
X1-H		......PANEL, MOUNTING: SMC549807 (70117)	EA	1										A3A1A2A1A1MP1
MD-H		......RIBBON: SMB550176 (70117)	EA	1									6	A3A1A2A1A1MP2
P--H	5340-598-1048	......RING, RETAINING: 5101-50C (79136)	EA	2				*	2	2	19	10	8	A3A1A2A1A1H1
P--H	5940-501-8634	......TERMINAL LUG: 4021 (77147)	EA	2				2	2	2	83	60	6	A3A1A2A1A1E1
P--H	5940-836-3536	......TERMINAL LUG: 4040-2HOTTINNED (77147)	EA	2				2	4	6	297	250	6	A3A1A2A1A1E2
P--H	5310-687-7740	......NUT, PLAIN, HEXAGON: MS35649-22 (96906)	EA	2				*	*	*	*	*	6	A3A1A2A1A1E2H2
	5305-889-3118	......SCREW, MACHINE: MS35206-203 (96906)	EA	2				*	*	*	*	*	6	A3A1A2A1A1E2H2

(1) SMR CODE	(2) FEDERAL STOCK NUMBER	(3) DESCRIPTION REFERENCE NUMBER & MFR. CODE / USABLE ON CODE	(4) UNIT OF MEAS	(5) QTY INC IN UNIT	(6) 30-DAY DS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(7) 30-DAY GS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(8) 1 YR ALW PER 100 EQUIP CNTGCY	(9) DEPOT MAINT ALW PER 100 EQUIP	(10) ILLUSTRATIONS (a) FIG NO.	(b) ITEM NO. OR REFERENCE DESIGNATION
	5310-261-7352	.....WASHER, LOCK: 1902-00 (78189)	EA	2				*	*	*	*	*	6	A3A1A2A1A1E2H2
P--H	5940-947-7259	.....TERMINAL STUD: 4878-1-0516 (71279)	EA	1				*	2	2	27	15	6	A3A1A2A1A1E3
	5305-990-8386	.....SCREW, MACHINE: MS35206-201 (96906)	EA	1				*	*	*	*	*	6	A3A1A2A1A1E3H1
P--H	5821-757-2798	.....COLLAR, SHAFT: SMB549726-1 (70117)	EA	2				*	2	2	12	5	8	A3A1A2A1MP3
	5305-685-7329	.....SET SCREW: SMB550146 (70117)	EA	2				*	*	*	*	*	8	A3A1A2A1MP3H2
P--H	5821-757-2798	.....COLLAR, SHAFT: SMB549726-1 (70117)	EA	REF				REF	REF	REF	REF	REF	8	A3A1A2A1MP4
	5305-685-7329	.....SET SCREW: SMB550146 (70117)	EA	2				REF	REF	REF	REF	REF	8	A3A1A2A1MP4H2
X1-H		.....CORE ASSEMBLY: SMC550077 (70117)	EA	1									8	A3A1A2A1A2
X1-H		.....CORE, ADJUSTABLE TUNING: SMB549939 (70117)	EA	3										A3A1A2A1A2E1
X1-H		.....CORE, ADJUSTABLE TUNING: SMB549939 (70117)	EA	REF										A3A1A2A1A2E2
X1-H		.....CORE, ADJUSTABLE TUNING: SMB549939 (70117)	EA	REF										A3A1A2A1A2E3
X1-H		.....RACK, SLUG: SMC549854 (70117)	EA	1										A3A1A2A1A2MP1
X1-H		.....SCREW, EXTERNAL RELIEF: SMB549777 (70117)	EA	3									8	A3A1A2A1A2H1
A--H		.....FOLLOWER ASSEMBLY: SMB549975 (70117)	EA	2									8	A3A1A2A1A3
P--H	3110-798-5463	.....BEARING, BALL: SR1PPK25-7 (83086)	EA	1				*	2	2	19	10	8	A3A1A2A1A3MP1
P--H	5315-758-0116	.....PIN, STRAIGHT, HEADLESS: SMB549784 (70117)	EA	1				*	2	2	19	10	8	A3A1A2A1A3MP2
P--H	5821-757-2794	.....SHAFT, STRAIGHT: SMC549720 (70117)	EA	1				*	2	2	19	10	8	A3A1A2A1A3MP3
A--H		.....FOLLOWER ASSEMBLY: SMB549975 (70117)	EA	REF									8	A3A1A2A1A4
P--H	3110-798-5463	.....BEARING, BALL: SR1PPK25-7 (83086)	EA	1				REF	REF	REF	REF	REF	8	A3A1A2A1A4MP1
P--H	5315-758-0116	.....PIN, STRAIGHT, HEADLESS: SMB549784 (70117)	EA	1				REF	REF	REF	REF	REF	8	A3A1A2A1A4MP2
P--H	5821-757-2794	.....SHAFT, STRAIGHT: SMC549720 (70117)	EA	1				REF	REF	REF	REF	REF	8	A3A1A2A1A4MP3
P--H	5340-903-7567	.....RING, RETAINING: MS16624-18 (96906)	EA	2				*	2	2	19	10	8	A3A1A2A1H1
P--H	5340-200-5234	.....RING, RETAINING: MS16632-1025 (96906)	EA	2				*	2	2	19	10	8	A3A1A2A1H2
P--H		.....RING, RETAINING: 5101-16C (89462)	EA	2				*	2	2	19	10	8	A3A1A2A1H3
P--H	5340-985-6642	.....SPRING, HELICAL, COMPRESSION: SMB549831-3 (70117)	EA	2				*	2	2	19	10	8	A3A1A2A1MP5

(1) SMR CODE	(2) FEDERAL STOCK NUMBER	(3) DESCRIPTION REFERENCE NUMBER & MFR. CODE / USABLE ON CODE	(4) UNIT OF MEAS	(5) QTY INC IN UNIT	(6) 30-DAY DS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(7) 30-DAY GS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(8) 1 YR ALW PER 100 EQUIP CNTGCY	(9) DEPOT MAINT ALW PER 100 EQUIP	(10) ILLUSTRATIONS (a) FIG NO.	(b) ITEM NO. OR REFERENCE DESIGNATION
MD-H		....COVER: SMD549872 (70117)	EA	1									6	A3A1A2MP2
MD-H		....COVER, TOP: SMD550096 (70117)	EA	1									7	A3A1A2MP3
	5305-054-5647	....SCREW, MACHINE: MS51957-13 (96906)	EA	2				REF	REF	REF	REF	REF	7	A3A1A2MP3H2
	5310-209-0960	....WASHER, LOCK: 1704-03 (78189)	EA	2				*	*	*	*	*	7	A3A1A2MP3H2
MD-H		....NUT, SLEEVE: SMC549764-3 (70117)	EA	4									7	A3A1A2H1
		POWER AMPLIFIER SUBASSEMBLY:	EA	1									6	A3A1A2A2
P--H	5995-728-3244	.....CABLE ASSEMBLY: SMB549985-6 (70117)	EA	1				*	*	*	5	2	7	A3A1A2A2W1
X1-H		......CONNECTOR, PLUG: P1031 (94375)	EA	1									7	A3A1A2A2W1P801
P--H	5910-811-4783	.....CAPACITOR, FIXED, CERAMIC: CK06CW222M (81349)	EA	1				2	2	3	158	25	7	A3A1A2A2C819
P--H	5910-837-2577	.....CAPACITOR, FIXED, CERAMIC: CK60AW152M (81349)	EA	10				2	2	2	95	70	7	A3A1A2A2C801
P--H	5910-837-2577	.....CAPACITOR, FIXED, CERAMIC: CK60AW152M (81349)	EA	REF				REF	REF	REF	REF	REF	7	A3A1A2A2C802
P--H	5910-837-2577	.....CAPACITOR, FIXED, CERAMIC: CK60AW152M (81349)	EA	REF				REF	REF	REF	REF	REF	7	A3A1A2A2C803
P--H	5910-837-2577	.....CAPACITOR, FIXED, CERAMIC: CK60AW152M (81349)	EA	REF				REF	REF	REF	REF	REF	7	A3A1A2A2C807
P--H	5910-837-2577	.....CAPACITOR, FIXED, CERAMIC: CK60AW152M (81349)	EA	REF				REF	REF	REF	REF	REF	7	A3A1A2A2C809
P--H	5910-837-2577	.....CAPACITOR, FIXED, CERAMIC: CK60AW152M (81349)	EA	REF				REF	REF	REF	REF	REF	7	A3A1A2A2C810
P--H	5910-837-2577	.....CAPACITOR, FIXED, CERAMIC: CK60AW152M (81349)	EA	REF				REF	REF	REF	REF	REF	7	A3A1A2A2C814
P--H	5910-837-2577	.....CAPACITOR, FIXED, CERAMIC: CK60AW152M (81349)	EA	REF				REF	REF	REF	REF	REF	7	A3A1A2A2C815
P--H	5910-837-2577	.....CAPACITOR, FIXED, CERAMIC: CK60AW152M (81349)	EA	REF				REF	REF	REF	REF	REF	7	A3A1A2A2C820
P--H	5910-837-2577	.....CAPACITOR, FIXED, CERAMIC: CK60AW152M (81349)	EA	REF				REF	REF	REF	REF	REF	7	A3A1A2A2C821
P--H	5910-892-7334	.....CAPACITOR, FIXED, CERAMIC: CK61AW222M (81349)	EA	1				*	2	2	12	5	7	A3A1A2A2C822
P--H	5910-891-2153	.....CAPACITOR, FIXED, CERAMIC: CM05F101J03 (81349)	EA	2				*	2	2	19	10	7	A3A1A2A2C808
P--H	5910-891-2153	.....CAPACITOR, FIXED, CERAMIC: CM05F101J03 (81349)	EA	REF				REF	REF	REF	REF	REF	7	A3A1A2A2C813
X1-H		.....CHASSIS: SMD549924 (70117)	EA	1										A3A1A2A2MP1
P--H	5960-728-5968	.....ELECTRON TUBE: A0984 (33173)	EA	1				2	2	2	71	50	6	A3A1A2A2V803
P--H	5960-262-1357	.....ELECTRON TUBE: 5654-6AK5W (81349)	EA	1				2	2	2	71	50	6	A3A1A2A2V801

(1) SMR CODE	(2) FEDERAL STOCK NUMBER	(3) DESCRIPTION REFERENCE NUMBER & MFR. CODE	USABLE ON CODE	(4) UNIT OF MEAS	(5) QTY INC IN UNIT	(6) 30-DAY DS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(7) 30-DAY GS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(8) 1 YR ALW PER 100 EQUIP CNTGCY	(9) DEPOT MAINT ALW PER 100 EQUIP	(10) ILLUSTRATIONS (a) FIG NO.	(b) ITEM NO. OR REFERENCE DESIGNATION
P--H	5960-237-0077	.....ELECTRON TUBE: 5685 (81349)		EA	1				2	2	2	71	50	6	A3A1A2A2V802
P--H	5915-728-5971	.....FILTER, RADIO: JN14-1265A (14101)		EA	1				*	*	*	5	2	6	A3A1A2A2FL801
	5305-054-5646	.....SCREW, MACHINE: MS51957-12 (96906)		EA	4				REF	REF	REF	REF	REF	6	A3A1A2A2FL801H4
	5310-271-4642	.....NUT, PLAIN, HEXAGON: MS35649-44 (96906)		EA	4				REF	REF	REF	REF	REF	6	A3A1A2A2FL801H4
P--H	5325-286-6047	.....GROMMET, RUBBER: 901 (75543)		EA	2				2	2	2	46	30	6	A3A1A2A2H1
P--H	5905-686-4529	.....RESISTOR, FIXED, COMPOSITION: RC07GF123K (81349)		EA	2				2	2	2	53	35	7	A3A1A2A2R803
P--H	5905-686-4529	.....RESISTOR, FIXED, COMPOSITION: RC07GF123K (81349)		EA	REF				REF	REF	REF	REF	REF	7	A3A1A2A2R813
P--H	5905-279-1756	.....RESISTOR, FIXED, COMPOSITION: RC07GF151K (81349)		EA	1				*	2	2	19	10	7	A3A1A2A2R806
P--H	5905-752-3156	.....RESISTOR, FIXED, COMPOSITION: RC07GF223K (81349)		EA	1				2	2	2	46	30	7	A3A1A2A2R805
P--H	5905-725-6995	.....RESISTOR, FIXED, COMPOSITION: RC07GF271K (81349)		EA	1				*	2	2	19	10	7	A3A1A2A2R802
P--H	5905-686-3838	.....RESISTOR, FIXED, COMPOSITION: RC07GF273J (81349)		EA	1				REF	REF	REF	REF	REF	7	A3A1A2A2R809
P--H	5905-681-8855	.....RESISTOR, FIXED, COMPOSITION: RC07GF394J (81349)		EA	1				*	2	2	12	5	7	A3A1A2A2R811
P--H	5905-688-4447	.....RESISTOR, FIXED, COMPOSITION: RC07GF473K (81349)		EA	1				2	2	2	40	25	7	A3A1A2A2R801
P--H	5905-688-3475	.....RESISTOR, FIXED, COMPOSITION: RC07GF474K (81349)		EA	1				*	2	2	12	5	7	A3A1A2A2R812
P--H	5905-245-0023	.....RESISTOR, FIXED, COMPOSITION: RC07GF682K (81349)		EA	1				*	2	2	12	5	7	A3A1A2A2R807
P--H	5905-500-7272	.....RESISTOR, FIXED, COMPOSITION: RC07GF331K (81349)		EA	1				*	2	2	12	5	7	A3A1A2A2R808
P--H	5905-975-1144	.....RESISTOR, FIXED, WIRE WOUND: RW67V510 (81349)		EA	1				*	2	2	19	10	7	A3A1A2A2R815
P--H		.....RESISTOR, FIXED, WIRE WOUND: RW69V103 (81349)		EA	2				2	2	2	33	20	7	A3A1A2A2R804
P--H		.....RESISTOR, FIXED, WIRE WOUND: RW69V103 (81349)		EA	REF				REF	REF	REF	REF	REF	7	A3A1A2A2R810
P--H	5905-982-3336	.....RESISTOR, FIXED, WIRE WOUND: RW69V300 (81349)		EA	1				*	2	2	19	10	7	A3A1A2A2R814
P--H	5960-615-4597	.....SHIELD, TUBE: SMC550066-1 (70117)		EA	1				*	2	2	19	10	6	A3A1A2A2E1
P--D		.....SHIELD, TUBE: SMC550066-2 (70117)		EA	1								*	6	A3A1A2A2E2
P--H	5935-892-9634	.....SOCKET, TUBE: SMC549958 (71785)		EA	1				*	2	2	12	5	7	A3A1A2A2XV803
	5305-054-5649	.....SCREW, MACHINE: MS51957-15 (96906)		EA	1				REF	REF	REF	REF	REF	7	A3A1A2A2XV803H1
P--H		.....NUT, PLAIN, HEXAGON: MS35649-42 (96906)		EA	1				*	2	2	12	5	7	A3A1A2A2XV803H1

(1) SMR CODE	(2) FEDERAL STOCK NUMBER	(3) DESCRIPTION REFERENCE NUMBER & MFR. CODE / USABLE ON CODE	(4) UNIT OF MEAS	(5) QTY INC IN UNIT	(6) 30-DAY DS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(7) 30-DAY GS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(8) 1 YR ALW PER 100 EQUIP CNTGCY	(9) DEPOT MAINT ALW PER 100 EQUIP	(10) ILLUSTRATIONS (a) FIG NO.	(b) ITEM NO. OR REFERENCE DESIGNATION
P--H	5935-729-7318	.....SOCKET, TUBE: X7470G91 (80368)	EA	1				*	2	2	12	5	7	A3A1A2A2XV801
P--H	5935-729-7312	.....SOCKET, TUBE: X7490C90 (80368)	EA	1				*	2	2	12	5	7	A3A1A2A2XV802
P--H	5940-836-3536	.....TERMINAL LUG: 4040-2HOTTINNED (77147)	EA	7				REF	REF	REF	REF	REF	7	A3A1A2A2E3
P--H	5940-258-1813	.....TERMINAL LUG: 4040-4HOTTINNED (77147)	EA	4				2	2	2	59	40	7	A3A1A2A2E4
P--H	5940-176-7086	.....TERMINAL STUD: 1A1A12 (92825)	EA	4				*	2	2	27	15	7	A3A1A2A2E5
	5305-054-5649	.....SCREW, MACHINE: MS51957-15 (96906)	EA	1				REF	REF	REF	REF	REF	6	A3A1A2A2E5H1
P--H	5940-176-7086	.....TERMINAL STUD: 1A1A12 (92825)	EA	REF				REF	REF	REF	REF	REF	7	A3A1A2A2E6
	5305-054-5647	.....SCREW, MACHINE: MS51957-13 (96906)	EA	3				REF	REF	REF	REF	REF	6	A3A1A2A2E6H3
	5310-559-7792	.....WASHER, LOCK: AN936B4B (88044)	EA	3				REF	REF	REF	REF	REF	6	A3A1A2A2E6H3
MD-H		.....TERMINAL, STUD: 4878-1-0516 (71279)	EA	8									7	A3A1A2A2E7
	5305-990-8386	.....SCREW, MACHINE: MS35206-201 (96906)	EA	6				REF	REF	REF	REF	REF	6	A3A1A2A2E7H6
	5310-261-7352	.....WASHER, LOCK: 1902-00 (78189)	EA	6				REF	REF	REF	REF	REF	6	A3A1A2A2E7H6
MD-H		.....TERMINAL, STUD: 4878-1-0516 (71279)	EA	REF									7	A3A1A2A2E8
	5305-762-7482	.....SCREW, MACHINE: MS35206-202 (96906)	EA	2				*	*	*	*	*	6	A3A1A2A2E8H2
MD-H		....STRAP, RETAINING: SMB549773 (70117)	EA	1									8	A3A1A2MP4
P--H	5307-687-6888	....STUD, CONTINUOUS THREAD: SMB550060 (70117)	EA	4				*	2	2	27	15	6	A3A1A2H2
PH-F-S	5821-728-3641	...RF AMPLIFIER: SMD549673 (70117)	EA	1				*	*	*	15	2	4	A3A1A3
	5305-637-5884	...SCREW, MACHINE: MS35214-12 (96906)	EA	2				REF	REF	REF	REF	REF	4	A3A1A3H2
	5305-763-6955	...SCREW, MACHINE: MS51959-21 (96906)	EA	3				*	*	*	*	*	4	A3A1A3H3
P--H		...SET SCREW: SMB550151-2 (70117)	EA	1				REF	REF	REF	REF	REF	4	A3A1A3H1
MD-H		....BOARD, INSULATOR: SMC549890 (70117)	EA	1									9	A3A1A3E1
P--D		....CABLE ASSEMBLY, RF: SMB549985-2 (70117)	EA	1								*	9	A3A1A3W1
X1		.....CONNECTOR, PLUG: P1031 (94375)	EA	1									9	A3A1A3W1P602
P--H	5995-226-4200	....CABLE ASSEMBLY, RF: SMB549985-4 (70117)	EA	1				*	*	2	15	7	9	A3A1A3W2
X1		.....CONNECTOR, PLUG: P1031 (94375)	EA	1									9	A3A1A3W2P601

(1) SMR CODE	(2) FEDERAL STOCK NUMBER	(3) DESCRIPTION REFERENCE NUMBER & MFR. CODE / USABLE ON CODE	(4) UNIT OF MEAS	(5) QTY INC IN UNIT	(6) 30-DAY DS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(7) 30-DAY GS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(8) 1 YR ALW PER 100 EQUIP CNTGCY	(9) DEPOT MAINT ALW PER 100 EQUIP	(10) ILLUSTRATIONS (a) FIG NO.	(b) ITEM NO. OR REFERENCE DESIGNATION
P--H	5910-731-9657	....CAPACITOR, VARIABLE: SMD550121 (70117)	EA	1				*	2	2	12	5	9	A3A1A3C601
P--H	5910-890-8988	....CAPACITOR, FIXED, CERAMIC: CK05CW102M (81349)	EA	1				2	2	2	65	45	9	A3A1A3C629
P--H	5950-086-2934	....COIL, RF: MS16225-16 (96906)	EA	7				2	2	3	113	35	9	A3A1A3L604
P--H	5950-086-2934	....COIL, RF: MS16225-16 (96906)	EA	REF				REF	REF	REF	REF	REF	9	A3A1A3L605
P--H	5950-086-2934	....COIL, RF: MS16225-16 (96906)	EA	REF				REF	REF	REF	REF	REF	9	A3A1A3L607
P--H	5950-086-2934	....COIL, RF: MS16225-16 (96906)	EA	REF				REF	REF	REF	REF	REF	9	A3A1A3L608
P--H	5950-086-2934	....COIL, RF: MS16225-16 (96906)	EA	REF				REF	REF	REF	REF	REF	9	A3A1A3L611
P--H	5950-086-2934	....COIL, RF: MS16225-16 (96906)	EA	REF				REF	REF	REF	REF	REF	9	A3A1A3L614
P--H	5950-086-2934	....COIL, RF: MS16225-16 (96906)	EA	REF				REF	REF	REF	REF	REF	9	A3A1A3L618
P--H	5821-719-4973	....COVER, SIDE: SMC549687 (70117)	EA	1				*	*	*	5	2	4	A3A1A3A1
X1-H		.....COVER: SMC549687-1 (70117)	EA	1										A3A1A3A1MP1
MD-H		.....GASKET, RF: SMB549926-1 (70117)	EA	1										A3A1A3A1MP2
P--H		....COVER, TOP: SMD549870 (70117)	EA	1				*	*	*	5	2	4	A3A1A3A2
	5305-762-7482	....SCREW, MACHINE: MS35206-202 (96906)	EA	4				REF	REF	REF	REF	REF	4	A3A1A3A2H4
	5310-261-7352	....WASHER, LOCK: 1902-00 (78189)	EA	4				REF	REF	REF	REF	REF	4	A3A1A3A2H4
X1-H		.....COVER: SMD549870-1 (70117)	EA	1										A3A1A3A2MP1
MD-H		.....GASKET, RF: SMB549926-2 (70117)	EA	2										A3A1A3A2MP2
P--H	5821-719-4976	....PLATE, COVER: SMC549721 (70117)	EA	1				*	*	*	5	2	4	A3A1A3MP1
MD-H		....PLATE, SHIELD: SMC549889 (70117)	EA	1										A3A1A3MP2
P--H	5905-808-6135	....RESISTOR, FIXED, COMPOSITION RC07GF270J (81349)	EA	1				2	2	2	33	20	9	A3A1A3R629
MD-H		....RIBBON: SMB550176 (70117)	EA	1									11	A3A1A3MP3
P--D	5821-721-3273	....RF AMPLIFIER SUBASSEMBLY: SMD549691 (70117)	EA	1								2	9	A3A1A3A3
	5305-762-7482	....SCREW, MACHINE: MS35206-202 (96906)	EA	5				REF	REF	REF	REF	REF	9	A3A1A3A3H5
	5305-988-1167	....SCREW, MACHINE: MS35206-204 (96906)	EA	4				*	*	*	*	*	9	A3A1A3A3H4
	5310-261-7352	....WASHER, LOCK: 1902-00 (78189)	EA	9				REF	REF	REF	REF	REF	9	A3A1A3A3H9

(1) SMR CODE	(2) FEDERAL STOCK NUMBER	(3) DESCRIPTION REFERENCE NUMBER & MFR. CODE / USABLE ON CODE	(4) UNIT OF MEAS	(5) QTY INC IN UNIT	(6) 30-DAY DS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(7) 30-DAY GS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(8) 1 YR ALW PER 100 EQUIP CNTGCY	(9) DEPOT MAINT ALW PER 100 EQUIP	(10) ILLUSTRATIONS (a) FIG NO.	(b) ITEM NO. OR REFERENCE DESIGNATION
X1-H		.....BOARD, PC: SMD550304 (70117)	EA	1										A3A1A3A3E1
MD-H		.....BRACKET, ANGLE: SMC549897 (70117)	EA	3										A3A1A3A3MP1
MD-H		.....BRACKET, ANGLE: SMC549898 (70117)	EA	1										A3A1A3A3MP2
P--H	5910-890-8988	.....CAPACITOR, FIXED, CERAMIC: CK05CW102M (81349)	EA	2				REF	REF	REF	REF	REF	10	A3A1A3A3C632
P--H	5910-890-8988	.....CAPACITOR, FIXED, CERAMIC: CK05CW102M (81349)	EA	REF				REF	REF	REF	REF	REF	10	A3A1A3A3C639
P--H	5910-728-4095	.....CAPACITOR, FIXED, CERAMIC: DA718-002 (71590)	EA	4				2	2	2	59	40	10	A3A1A3A3C634
P--H	5910-728-4095	.....CAPACITOR, FIXED, CERAMIC: DS718-002 (71590)	EA	REF				REF	REF	REF	REF	REF	10	A3A1A3A3C636
P--H	5910-728-4095	.....CAPACITOR, FIXED, CERAMIC: DS718-002 (71590)	EA	REF				REF	REF	REF	REF	REF	10	A3A1A3A3C638
P--H	5910-728-4095	.....CAPACITOR, FIXED, CERAMIC: DS718-002 (71590)	EA	REF				REF	REF	REF	REF	REF	10	A3A1A3A3C640
P--H	5910-082-4616	.....CAPACITOR, FIXED, CERAMIC: VK21CW222M (95275)	EA	4				2	2	2	33	20	10	A3A1A3A3C630
P--H	5910-082-4616	.....CAPACITOR, FIXED, CERAMIC: VK21CW222M (95275)	EA	REF				REF	REF	REF	REF	REF	10	A3A1A3A3C631
P--H	5910-082-4616	.....CAPACITOR, FIXED, CERAMIC: VK21CW222M (95275)	EA	REF				REF	REF	REF	REF	REF	10	A3A1A3A3C641
P--H	5910-082-4616	.....CAPACITOR, FIXED, CERAMIC: VK21CW222M (95275)	EA	REF				REF	REF	REF	REF	REF	10	A3A1A3A3C642
P--H	5910-082-4617	.....CAPACITOR, FIXED, CERAMIC: VK31CW472M (95275)	EA	1				*	2	2	12	5	10	A3A1A3A3C637
X1-H		.....CAPACITOR, FIXED, CERAMIC: 8121-032C0H0270G (72982)	EA	1									10	A3A1A3A3C635
P--H	5950-815-7306	.....COIL, RF: 1537-06 (99800)	EA	1				*	2	2	12	5	10	A3A1A3A3L617
P--H	5915-012-7948	.....CORE: 5659065-4A (02114)	EA	8				2	2	2	95	70	10	A3A1A3A3E601
P--H	5915-012-7948	.....CORE: 5659065-4A (02114)	EA	REF				REF	REF	REF	REF	REF	10	A3A1A3A3E602
P--H	5915-012-7948	.....CORE: 5659065-4A (02114)	EA	REF				REF	REF	REF	REF	REF	10	A3A1A3A3E603
P--H	5915-012-7948	.....CORE: 5659065-4A (02114)	EA	REF				REF	REF	REF	REF	REF	10	A3A1A3A3E604
P--H	5915-012-7948	.....CORE: 5659065-4A (02114)	EA	REF				REF	REF	REF	REF	REF	10	A3A1A3A3E605
P--H	5915-012-7948	.....CORE: 5659065-4A (02114)	EA	REF				REF	REF	REF	REF	REF	10	A3A1A3A3E606
P--H	5915-012-7948	.....CORE: 5659065-4A (02114)	EA	REF				REF	REF	REF	REF	REF	10	A3A1A3A3E607
P--H	5915-012-7948	.....CORE: 5659065-4A (02114)	EA	REF				REF	REF	REF	REF	REF	10	A3A1A3A3E608
P--H	5961-994-7742	.....PAD, MOUNTING: 10125 (07047)	EA	1				*	2	2	19	10	10	A3A1A3A3E2

(1) SMR CODE	(2) FEDERAL STOCK NUMBER	(3) DESCRIPTION REFERENCE NUMBER & MFR. CODE / USABLE ON CODE	(4) UNIT OF MEAS	(5) QTY INC IN UNIT	(6) 30-DAY DS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(7) 30-DAY GS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(8) 1 YR ALW PER 100 EQUIP CNTGCY	(9) DEPOT MAINT ALW PER 100 EQUIP	(10) ILLUSTRATIONS (a) FIG NO.	(b) ITEM NO. OR REFERENCE DESIGNATION
P--H	5905-683-7721	.....RESISTOR, FIXED, COMPOSITION: RC07GF101J (81349)	EA	1				*	2	2	19	10	10	A3A1A3A3R625
P--H	5905-683-2238	.....RESISTOR, FIXED, COMPOSITION: RC07GF103J (81349)	EA	5				2	2	2	71	50	10	A3A1A3A3R612
P--H	5905-683-2238	.....RESISTOR, FIXED, COMPOSITION: RC07GF103J (81349)	EA	REF				REF	REF	REF	REF	REF	10	A3A1A3A3R614
P--H	5905-683-2238	.....RESISTOR, FIXED, COMPOSITION: RC07GF103J (81349)	EA	REF				REF	REF	REF	REF	REF	10	A3A1A3A3R617
P--H	5905-683-2238	.....RESISTOR, FIXED, COMPOSITION: RC07GF103J (81349)	EA	REF				REF	REF	REF	REF	REF	10	A3A1A3A3R618
P--H	5905-683-2238	.....RESISTOR, FIXED, COMPOSITION: RC07GF103J (81349)	EA	REF				REF	REF	REF	REF	REF	10	A3A1A3A3R624
P--H	5905-688-3738	.....RESISTOR, FIXED, COMPOSITION: RC07GF182J (81349)	EA	1				*	2	2	12	5	10	A3A1A3A3R628
P--H	5905-723-5251	.....RESISTOR, FIXED, COMPOSITION: RC07GF222J (81349)	EA	1				*	2	2	27	15	10	A3A1A3A3R622
P--H	5905-686-3838	.....RESISTOR, FIXED, COMPOSITION: RC07GF273J (81349)	EA	2				REF	REF	REF	REF	REF	10	A3A1A3A3R616
P--H	5905-686-3838	.....RESISTOR, FIXED, COMPOSITION: RC07GF273J (81349)	EA	REF				REF	REF	REF	REF	REF	10	A3A1A3A3R626
P--H	5905-686-9998	.....RESISTOR, FIXED, COMPOSITION: RC07GF472J (81349)	EA	2				2	2	2	53	35	10	A3A1A3A3R620
P--H	5905-686-9998	.....RESISTOR, FIXED, COMPOSITION: RC07GF472J (81349)	EA	REF				REF	REF	REF	REF	REF	10	A3A1A3A3R627
P--H	5905-691-0195	.....RESISTOR, FIXED, COMPOSITION: RC07GF562J (81349)	EA	2				2	2	2	65	45	10	A3A1A3A3R619
P--H	5905-691-0195	.....RESISTOR, FIXED, COMPOSITION: RC07GF562J (81349)	EA	REF				REF	REF	REF	REF	REF	10	A3A1A3A3R623
P--H	5905-686-9997	.....RESISTOR, FIXED, COMPOSITION: RC07GF682J (81349)	EA	1				2	2	3	130	100	10	A3A1A3A3R613
P--H	5905-681-9970	.....RESISTOR, FIXED, COMPOSITION: RC07GF822J (81349)	EA	2				2	2	2	53	35	10	A3A1A3A3R615
P--H	5905-681-9970	.....RESISTOR, FIXED, COMPOSITION: RC07GF822J (81349)	EA	REF				REF	REF	REF	REF	REF	10	A3A1A3A3R621
P--H	5960-615-0095	.....SEMICONDUCTOR, DIODE: 1N276 (81349)	EA	8				2	2	3	158	125	10	A3A1A3A3CR601
P--H	5960-615-0095	.....SEMICONDUCTOR, DIODE: 1N276 (81349)	EA	REF				REF	REF	REF	REF	REF	10	A3A1A3A3CR602
P--H	5960-615-0095	.....SEMICONDUCTOR, DIODE: 1N276 (81349)	EA	REF				REF	REF	REF	REF	REF	10	A3A1A3A3CR603
P--H	5960-615-0095	.....SEMICONDUCTOR, DIODE: 1N276 (81349)	EA	REF				REF	REF	REF	REF	REF	10	A3A1A3A3CR604
P--H	5960-615-0095	.....SEMICONDUCTOR, DIODE: 1N276 (81349)	EA	REF				REF	REF	REF	REF	REF	10	A3A1A3A3CR605
P--H	5960-615-0095	.....SEMICONDUCTOR, DIODE: 1N276 (81349)	EA	REF				REF	REF	REF	REF	REF	10	A3A1A3A3CR606
P--H	5960-615-0095	.....SEMICONDUCTOR, DIODE: 1N276 (81349)	EA	REF				REF	REF	REF	REF	REF	10	A3A1A3A3CR607
P--H	5960-615-0095	.....SEMICONDUCTOR, DIODE: 1N276 (81349)	EA	REF				REF	REF	REF	REF	REF	10	A3A1A3A3CR608

(1) SMR CODE	(2) FEDERAL STOCK NUMBER	(3) DESCRIPTION REFERENCE NUMBER & MFR. CODE / USABLE ON CODE	(4) UNIT OF MEAS	(5) QTY INC IN UNIT	(6) 30-DAY DS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(7) 30-DAY GS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(8) 1 YR ALW PER 100 EQUIP CNTGCY	(9) DEPOT MAINT ALW PER 100 EQUIP	(10) ILLUSTRATIONS (a) FIG NO.	(b) ITEM NO. OR REFERENCE DESIGNATION
MD-H		.....SHIELD: SMC549820 (70117)	EA	1									10	A3A1A3A3MP3
P--H	5950-728-5166	.....TRANSFORMER, RF: 3P1190 (99800)	EA	1				*	2	2	3	8	10	A3A1A3A3T601
P--H	5961-882-4244	.....TRANSISTOR: 2N1225 (81349)	EA	1				*	2	2	33	20	10	A3A1A3A3Q604
P--H	5961-902-8820	.....TRANSISTOR: 2N2996 (01295)	EA	1				*	2	2	12	5	10	A3A1A3A3Q605
		RF AMPLIFIER SUBASSEMBLY:	EA	1									9	A3A1A3A4
	5305-762-7482	....SCREW, MACHINE: MS35206-202 (96906)	EA	1				REF	REF	REF	REF	REF	9	A3A1A3A4H1
	5305-988-1167	....SCREW, MACHINE: MS35206-204 (96906)	EA	2				REF	REF	REF	REF	REF	9	A3A1A3A4H2
	5310-261-7352	....WASHER, LOCK: 1902-00 (78189)	EA	3				REF	REF	REF	REF	REF	9	A3A1A3A4H3
P--H	5910-544-6494	.....CAPACITOR, FIXED, MICA: 65401713B3102M (53021)	EA	2				*	2	2	27	15	11	A3A1A3A4C605
P--H	5910-544-6494	.....CAPACITOR, FIXED, MICA: 65401713B3102M (53021)	EA	REF				REF	REF	REF	REF	REF	11	A3A1A3A4C606
P--H	5910-683-7157	.....CAPACITOR, VARIABLE: VC9GW (73899)	EA	1				2	2	2	40	25	11	A3A1A3A4C604
P--H	5950-764-5801	.....COIL, RF: CDD1895 (71279)	EA	1				2	2	2	59	40	11	A3A1A3A4L602
MD		.....PLATE ASSEMBLY: SMD549921 (70117)	EA	1										A3A1A3A4A1
X1-D		......GROMMET, PLASTIC: SMB549739 (70117)	EA	1										A3A1A3A4A1H1
X1-D		......PLATE: SMD549921-1 (70117)	EA	1										A3A1A3A4A1MP1
X1-D		......NUT, SLEEVE: SMB549788 (70117)	EA	3										A3A1A3A4A1H2
X1-D		......TERMINAL, STUD: STSM29 (98291)	EA	2										A3A1A3A4A1E1
		RF AMPLIFIER SUBASSEMBLY:	EA	1									9	A3A1A3A5
P--H		....SCREW, MACHINE: SMB550158-1 (70117)	EA	3				*	2	2	27	15	9	A3A1A3A5H3
P-H-R	5995-728-3242	.....CABLE ASSEMBLY, RF: SMB549984 (70117)	EA	1				*	*	*	*	*	9	A3A1A3A5W1
P--H	5935-806-0109	......CONNECTOR, PLUG: L1431 (94875)	EA	1				2	2	2	33	20	9	A3A1A3A5W1P604
P--H	5910-890-8988	.....CAPACITOR, FIXED, CERAMIC: CK05CW102M (81349)	EA	3				REF	REF	REF	REF	REF	11	A3A1A3A5C602
P--H	5910-890-8988	.....CAPACITOR, FIXED, CERAMIC: CK05CW102M (81349)	EA	REF				REF	REF	REF	REF	REF	11	A3A1A3A5C603
P--H	5910-890-8988	.....CAPACITOR, FIXED, CERAMIC: CK05CW102M (81349)	EA	REF				REF	REF	REF	REF	REF	11	A3A1A3A5C645
P--D		.....CAPACITOR, FIXED, CERAMIC: 8131-037T2H0131K (72982)	EA	2								*	11	A3A1A3A5C633

(1) SMR CODE	(2) FEDERAL STOCK NUMBER	(3) DESCRIPTION REFERENCE NUMBER & MFR. CODE / USABLE ON CODE	(4) UNIT OF MEAS	(5) QTY INC IN UNIT	(6) 30-DAY DS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(7) 30-DAY GS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(8) 1 YR ALW PER 100 EQUIP CNTGCY	(9) DEPOT MAINT ALW PER 100 EQUIP	(10) ILLUSTRATIONS (a) FIG NO.	(b) ITEM NO. OR REFERENCE DESIGNATION
P--D		.....CAPACITOR, FIXED, CERAMIC: 8131-037T2H0131K (72982)	EA	REF								REF	11	A3A1A3A5C644
P--H	5935-226-3406	.....CONNECTOR, RECEPTACLE: GX6-20P (95238)	EA	1				2	2	2	46	30	9	A3A1A3A5J601
	5305-727-8833	.....SCREW, MACHINE: MS51959-3 (96906)	EA	2				*	*	*	*	*	9	A3A1A3A5J601H2
P--H		.....WASHER, LOCK: SMB550171-1 (70117)	EA	2				*	2	2	16	8	9	A3A1A3A5J601H2
MD		.....PLATE ASSEMBLY: SMD549930 (70117)	EA	1										A3A1A3A5A1
X1-D		.....BRACKET: SMD549930-2 (70117)	EA	1										A3A1A3A5A1MP1
X1-D		.....RIVET, TUBULAR: R3484X1-8CADPL (12014)	EA	1										A3A1A3A5A1MP1H1
X1-D		.....EYELET, METALLIC: 834 (61957)	EA	3										A3A1A3A5A1H1
X1-D		.....INSERT, SCREW THREAD: SMB549789 (70117)	EA	2										A3A1A3A5A1H2
X1-D		.....PLATE: SMD549930-1 (70117)	EA	1										A3A1A3A5A1MP2
X1-D		.....TERMINAL, STUD: SMB550044 (70117)	EA	1										A3A1A3A5A1E1
P--H	5945-985-8163	.....RELAY, ARMATURE: SMC550061 (70117)	EA	1				*	2	2	16	8	11	A3A1A3A5K601
	5310-271-4640	.....NUT, PLAIN, HEXAGON: MS35649-24 (96906)	EA	2				REF	REF	REF	REF	REF	11	A3A1A3A5K601H2
	5305-727-8833	.....SCREW, MACHINE: MS51959-3 (96906)	EA	2				REF	REF	REF	REF	REF	11	A3A1A3A5K601H2
P--F		.....WASHER, FLAT: SMB550172-1 (70117)	EA	2				REF	REF	REF	REF	REF	11	A3A1A3A5K601H2
		RF AMPLIFIER SUBASSEMBLY:	EA	1									9	A3A1A3A6
	5305-762-7482	....SCREW, MACHINE: MS35206-202 (96906)	EA	1				REF	REF	REF	REF	REF	9	A3A1A3A6H1
	5305-988-1167	....SCREW, MACHINE: MS35206-204 (96906)	EA	2				REF	REF	REF	REF	REF	9	A3A1A3A6H2
	5310-261-7352	....WASHER, LOCK: 1902-00 (78189)	EA	3				REF	REF	REF	REF	REF	9	A3A1A3A6H3
P--H	5910-583-4709	.....CAPACITOR, FIXED, CERAMIC: 2404032W5P0401P (72982)	EA	1				*	2	2	19	10	11	A3A1A3A6C611.
P--D		.....CAPACITOR, FIXED, CERAMIC: 8101-031U1G0509K (72982)	EA	2								*	11	A3A1A3A6C607
P--D		.....CAPACITOR, FIXED, CERAMIC: 8101-031U1G0509K (72982)	EA	REF								*	11	A3A1A3A6C609
P--D		.....CAPACITOR, FIXED, CERAMIC: 8121-032P2G0470J (72982)	EA	1								*	11	A3A1A3A6C610
P--H	5910-544-6494	.....CAPACITOR, FIXED, MICA: 65401713B3102M (53021)	EA	1				REF	REF	REF	REF	REF	11	A3A1A3A6C612
P--H	5910-683-7157	.....CAPACITOR, VARIABLE: VC9GW (73899)	EA	1				REF	REF	REF	REF	REF	11	A3A1A3A6C608

(1) SMR CODE	(2) FEDERAL STOCK NUMBER	(3) DESCRIPTION REFERENCE NUMBER & MFR. CODE USABLE ON CODE	(4) UNIT OF MEAS	(5) QTY INC IN UNIT	(6) 30-DAY DS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(7) 30-DAY GS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(8) 1 YR ALW PER 100 EQUIP CNTGCY	(9) DEPOT MAINT ALW PER 100 EQUIP	(10) ILLUSTRATIONS (a) FIG NO.	(b) ITEM NO. OR REFERENCE DESIGNATION
P--H	5950-764-5901	.....COIL, RF: CDD1895 (71279)	EA	1				REF	REF	REF	REF	REF	11	A3A1A3A6L603
P--H	5950-728-5170	.....COIL, RF: SMB549866 (70117)	EA	1				*	2	2	16	8	11	A3A1A3A6L616
P--H	5950-819-3228	.....COIL, RF: 1537-04 (99800)	EA	1				2	2	2	40	25	11	A3A1A3A6L606
MD		.....PLATE ASSEMBLY: SMD549851 (70117)	EA	1										A3A1A3A6A1
X1-D		.....PLATE: SMD549851-1 (70117)	EA	1										A3A1A3A6A1MP1
X1-D		.....NUT, SLEEVE: SMB549788 (70117)	EA	2										A3A1A3A6A1H1
X1-D		.....TERMINAL, FEED THRU: FTSM1TUR (98291)	EA	1										A3A1A3A6A1E1
X1-D		.....TERMINAL, STUD: STSM29 (98291)	EA	3										A3A1A3A6A1E2
P--H	5905-752-3338	.....RESISTOR, FIXED, COMPOSITION: RC07GF102K (81349)	EA	1				2	2	2	71	50	11	A3A1A3A6R601
P--H	5905-726-6834	.....RESISTOR, FIXED, COMPOSITION: RC07GF562K (81349)	EA	1				2	2	2	40	25	11	A3A1A3A6R602
		RF AMPLIFIER SUBASSEMBLY:	EA	1									9	A3A1A3A7
	5305-762-7482	....SCREW, MACHINE: MS35206-202 (96906)	EA	1				REF	REF	REF	REF	REF	9	A3A1A3A7H1
	5305-988-1167	....SCREW, MACHINE: MS35206-204 (96906)	EA	2				REF	REF	REF	REF	REF	9	A3A1A3A7H2
	5310-261-7352	....WASHER, LOCK: 1902-00 (78189)	EA	3				REF	REF	REF	REF	REF	9	A3A1A3A7H3
P--H	5910-890-8988	.....CAPACITOR, FIXED, CERAMIC: CK05CW102M (81349)	EA	1				REF	REF	REF	REF	REF	9	A3A1A3A7C619
P--D		.....CAPACITOR, FIXED, CERAMIC: VK31CW562M (95275)	EA	1								*	11	A3A1A3A7C620
P--D		.....CAPACITOR, FIXED, CERAMIC: 8101-031U1G0509K (72982)	EA	2								REF	11	A3A1A3A7C622
P--D		.....CAPACITOR, FIXED, CERAMIC: 8101-031U1G0509K (72982)	EA	REF								REF	11	A3A1A3A7C643
P--D		.....CAPACITOR, FIXED, CERAMIC: 8121-032P2G0470J (72982)	EA	1								REF	11	A3A1A3A7C623
P--H	5910-683-7157	.....CAPACITOR, VARIABLE: VC9GW (73899)	EA	1				REF	REF	REF	REF	REF	11	A3A1A3A7C621
P--H	5950-764-5901	.....COIL, RF: CDD1895 (71279)	EA	1				REF	REF	REF	REF	REF	11	A3A1A3A7L612
P--H	5950-819-3228	.....COIL, RF: 1537-04 (99800)	EA	1				REF	REF	REF	REF	REF	11	A3A1A3A7L613
MD		.....PLATE ASSEMBLY: SMD549920 (70117)	EA	1										A3A1A3A7A1
X1-D		.....CLIP, SPRING TENSION: 6009-8A (91506)	EA	1										A3A1A3A7A1MP1
X1-D		.....EYELET, METALLIC: SE33 (61957)	EA	1										A3A1A3A7A1MP1H1

(1) SMR CODE	(2) FEDERAL STOCK NUMBER	(3) DESCRIPTION REFERENCE NUMBER & MFR. CODE / USABLE ON CODE	(4) UNIT OF MEAS	(5) QTY INC IN UNIT	(6) 30-DAY DS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(7) 30-DAY GS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(8) 1 YR ALW PER 100 EQUIP CNTGCY	(9) DEPOT MAINT ALW PER 100 EQUIP	(10) ILLUSTRATIONS (a) FIG NO.	(b) ITEM NO. OR REFERENCE DESIGNATION
X1-D		.....NUT, SLEEVE: SMB549788 (70117)	EA	3										A3A1A3A7A1H1
X1-D		.....PLATE: SMD549920-1 (70117)	EA	1										A3A1A3A7A1MP2
X1-D		.....TERMINAL, FEEDTHRU: FTSMITUR (98291)	EA	2										A3A1A3A7A1E1
X1-D		.....TERMINAL, STUD: STSM29 (98291)	EA	2										A3A1A3A7A1E2
P--H	5905-816-8554	.....RESISTOR, FIXED, COMPOSITION: RC07GF103K (81349)	EA	1				2	2	2	83	60	11	A3A1A3A7R608
P--H	5905-686-4528	.....RESISTOR, FIXED, COMPOSITION: RC07GF332K (81349)	EA	1				2	2	2	59	40	11	A3A1A3A7R609
P--H	5905-686-9997	.....RESISTOR, FIXED, COMPOSITION: RC07GF682J (81349)	EA	1				REF	REF	REF	REF	REF	11	A3A1A3A7R607
MD-H		.....TERMINAL, STUD: 4873-1-0516 (71279)	EA	2									9	A3A1A3A7E1
	5305-054-5635	.....SCREW, MACHINE: MS51957-1 (96906)	EA	2				REF	REF	REF	REF	REF	9	A3A1A3A7E1H2
	5310-722-5652	.....WASHER, LOCK: MS35338-77 (96906)	EA	2				REF	REF	REF	REF	REF	9	A3A1A3A7E1H2
P--H	5961-882-4244	.....TRANSISTOR: 2N1225 (81349)	EA	1				REF	REF	REF	REF	REF	11	A3A1A3A7Q602
		RF AMPLIFIER SUBASSEMBLY:	EA	1									9	A3A1A3A8
	5305-762-7482	....SCREW, MACHINE: MS35206-202 (96906)	EA	1				REF	REF	REF	REF	REF	9	A3A1A3A8H1
	5305-988-1167	....SCREW, MACHINE: MS35206-204 (96906)	EA	2				REF	REF	REF	REF	REF	9	A3A1A3A8H2
	5310-261-7352	....WASHER, LOCK: 1902-00 (78189)	EA	3				REF	REF	REF	REF	REF	9	A3A1A3A8H3
P--H	5910-890-8988	.....CAPACITOR, FIXED, CERAMIC: CK05CW102M (81349)	EA	1				REF	REF	REF	REF	REF	9	A3A1A3A8C614
P--D		.....CAPACITOR, FIXED, CERAMIC: VK31CW562M (95275)	EA	1								REF	11	A3A1A3A8C615
P--H	5910-583-4709	.....CAPACITOR, FIXED, CERAMIC: 2404032W5P0401P (72982)	EA	1				REF	REF	REF	REF	REF	11	A3A1A3A8C613
P--D		.....CAPACITOR, FIXED, CERAMIC: 8101-031U1G0509K (72982)	EA	1								REF	11	A3A1A3A8C618
P--D		.....CAPACITOR, FIXED, CERAMIC: 8121-032P2G0470J (72982)	EA	2								REF	11	A3A1A3A8C617
P--D		.....CAPACITOR, FIXED, CERAMIC: 8121-032P2G0470J (72982)	EA	REF								REF	11	A3A1A3A8C628
P--H	5910-683-7157	.....CAPACITOR, VARIABLE: VC9GW (73899)	EA	1				REF	REF	REF	REF	REF	11	A3A1A3A8C616
P--H	5950-764-5901	.....COIL, RF: CDD1895 (71279)	EA	1				REF	REF	REF	REF	REF	11	A3A1A3A8L609
P--H	5950-819-3228	.....COIL, RF: 1537-04 (99800)	EA	1				REF	REF	REF	REF	REF	11	A3A1A3A8L610
P--H	5915-012-7948	.....CORE: 5659065-4A (02114)	EA	1				REF	REF	REF	REF	REF	11	A3A1A3A8E609

(1) SMR CODE	(2) FEDERAL STOCK NUMBER	(3) DESCRIPTION REFERENCE NUMBER & MFR. CODE / USABLE ON CODE	(4) UNIT OF MEAS	(5) QTY INC IN UNIT	(6) 30-DAY DS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(7) 30-DAY GS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(8) 1 YR ALW PER 100 EQUIP CNTGCY	(9) DEPOT MAINT ALW PER 100 EQUIP	(10) ILLUSTRATIONS (a) FIG NO.	(b) ITEM NO. OR REFERENCE DESIGNATION
MD		.....PLATE ASSEMBLY: SMC549814 (70117)	EA	1										A3A1A3A8A1
X1-D		......CLIP, SPRING TENSION: 6013-15A (91506)	EA	1										A3A1A3A8A1MP1
X1-D		......EYELET, METALLIC: SE33 (61957)	EA	1										A3A1A3A8A1MP1H1
X1-D		......NUT, SLEEVE: SMB549788 (70117)	EA	2										A3A1A3A8A1H1
X1-D		......PLATE: SMC549814-1 (70117)	EA	1										A3A1A3A8A1MP2
X1-D		......TERMINAL, FEEDTHRU: FTSMITUR (98291)	EA	2										A3A1A3A8A1E1
X1-D		......TERMINAL, STUD: SMB550044 (70117)	EA	1										A3A1A3A8A1E2
X1-D		......TERMINAL, STUD: STSM29 (98291)	EA	2										A3A1A3A8A1E3
P--H	5905-752-3338	.....RESISTOR, FIXED, COMPOSITION: RC07GF102K (81349)	EA	1				REF	REF	REF	REF	REF	11	A3A1A3A8R605
P--H	5905-816-8554	.....RESISTOR, FIXED, COMPOSITION: RC07GF103K (81349)	EA	1				REF	REF	REF	REF	REF	11	A3A1A3A8R604
P--H	5905-726-6834	.....RESISTOR, FIXED, COMPOSITION: RC07GF562K (81349)	EA	1				REF	REF	REF	REF	REF	11	A3A1A3A8R606
P--H	5905-686-9997	.....RESISTOR, FIXED, COMPOSITION: RC07GF682J (81349)	EA	1				REF	REF	REF	REF	REF	11	A3A1A3A8R603
MD-H		.....TERMINAL, STUD: 4878-1-0516 (71279)	EA	2									11	A3A1A3A8E611
	5305-054-5635	.....SCREW, MACHINE: MS51957-1 (96906)	EA	2				REF	REF	REF	REF	REF	11	A3A1A3A8E611H2
	5310-722-5652	.....WASHER, LOCK: MS35338-77 (96906)	EA	2				REF	REF	REF	REF	REF	11	A3A1A3A8E611H2
P--H	5961-902-8820	.....TRANSISTOR: 2N2996 (01295)	EA	1				REF	REF	REF	REF	REF	11	A3A1A3A8Q601
		RF AMPLIFIER SUBASSEMBLY: SMD549865 (70117)	EA	1									9	A3A1A3A9
	5305-762-7482	....SCREW, MACHINE: MS35206-202 (96906)	EA	3				REF	REF	REF	REF	REF	9	A3A1A3A9H3
	5310-261-7352	....WASHER, LOCK: 1902-00 (78189)	EA	3				REF	REF	REF	REF	REF	9	A3A1A3A9H3
P--D		.....CABLE ASSEMBLY, RF: SMB549985-3 (70117)	EA	1								*	9	A3A1A3A9W1
X1-D		......CONNECTOR, PLUG: P1031 (94375)	EA	1									9	A3A1A3A9W1P603
P--H	5910-890-8988	.....CAPACITOR, FIXED, CERAMIC: CK05CW102M (81349)	EA	1				REF	REF	REF	REF	REF	11	A3A1A3A9C624
P--D		.....CAPACITOR, FIXED, CERAMIC: VK31CW562M (95275)	EA	1								REF	11	A3A1A3A9C625
P--D		.....CAPACITOR, FIXED, CERAMIC: 8121-032C0H0270G (72982)	EA	1								REF	11	A3A1A3A9C627
P--H	5910-683-7157	.....CAPACITOR, VARIABLE: VC9GW (73899)	EA	1				REF	REF	REF	REF	REF	11	A3A1A3A9C626

(1) SMR CODE	(2) FEDERAL STOCK NUMBER	(3) DESCRIPTION REFERENCE NUMBER & MFR. CODE / USABLE ON CODE	(4) UNIT OF MEAS	(5) QTY INC IN UNIT	(6) 30-DAY DS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(7) 30-DAY GS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(8) 1 YR ALW PER 100 EQUIP CNTGCY	(9) DEPOT MAINT ALW PER 100 EQUIP	(10) ILLUSTRATIONS (a) FIG NO.	(b) ITEM NO. OR REFERENCE DESIGNATION
P--H	5950-764-5901	.....COIL, RF: CDD1895 (71279)	EA	1				REF	REF	REF	REF	REF	11	A3A1A3A9L615
P--H	5935-814-0364	.....CONNECTOR, RECEPTACLE: 31-03 (98278)	EA	1				*	2	2	19	10	11	A3A1A3A9J602
MD		.....PLATE ASSEMBLY: SMD549855 (70117)	EA	1										A3A1A3A9A1
X1-D		.....CLIP, SPRING TENSION: 6009-8A (91506)	EA	1										A3A1A3A9A1MP1
X1-D		.....EYELET, METALLIC: SE34 (61957)	EA	1										A3A1A3A9A1MP1H1
X1-D		.....EYELET, METALLIC: 834 (61957)	EA	1										A3A1A3A9A1H1
X1-D		.....INSERT, SCREW THREAD: SMB549789 (70117)	EA	2										A3A1A3A9A1H2
X1-D		.....PLATE: SMD549855-1 (70117)	EA	1										A3A1A3A9A1MP2
X1-D		.....TERMINAL, STUD: SMB550044 (70117)	EA	2										A3A1A3A9A1E1
X1-D		.....TERMINAL, STUD: STSM29 (98291)	EA	2										A3A1A3A9A1E2
P--H	5905-816-8554	.....RESISTOR, FIXED, COMPOSITION: RC07GF103K (81349)	EA	1				REF	REF	REF	REF	REF	11	A3A1A3A9R610
P--H	5905-752-3156	.....RESISTOR, FIXED, COMPOSITION: RC07GF223K (81349)	EA	1				REF	REF	REF	REF	REF	11	A3A1A3A9R611
MD-H		.....TERMINAL, STUD: 4878-1-0516 (71279)	EA	2									9	A3A1A3A9B612
	5305-054-5635	.....SCREW, MACHINE: MS51957-1 (96906)	EA	2				REF	REF	REF	REF	REF	9	A3A1A3A9B612H2
	5310-722-5652	.....WASHER, LOCK: MS35338-77 (96906)	EA	2				REF	REF	REF	REF	REF	9	A3A1A3A9B612H2
P--H	5961-882-4244	.....TRANSISTOR: 2N1225 (81349)	EA	1				REF	REF	REF	REF	REF	11	A3A1A3A9Q603
PH-F-S	5821-226-4262	...AMPLIFIER, VARIABLE IF: SMD549674 (70117)	EA	1				*	*	*	5	2	4	A3A1A4
	5305-207-7466	...SCREW, MACHINE: MS35214-13 (96906)	EA	2				REF	REF	REF	REF	REF	4	A3A1A4H2
	5305-763-7827	...SCREW, MACHINE: MS51959-18 (96906)	EA	3				REF	REF	REF	REF	REF	4	A3A1A4H3
P--H		...SETSCREW: SMB550151-2 (70117)	EA	1				REF	REF	REF	REF	REF	4	A3A1A4H1
MD-H		....BUSHING, INSULATOR: SMB549738 (70117)	EA	1									14	A3A1A4E1
	5305-763-3356	....SCREW, MACHINE: MS51959-5 (96906)	EA	1				*	*	*	*	*	14	A3A1A4E1H1
P--H	5995-226-4268	....CABLE ASSEMBLY, RF: SMB549985-1 (70117)	EA	1				*	*	2	15	7	13	A3A1A4W1
X1-H		.....CONNECTOR, PLUG: P1031 (94375)	EA	1									13	A3A1A4W1P505
A--H		....CABLE ASSEMBLY: SMD550135 (70117)	EA	1									13	A3A1A4W2

(1) SMR CODE	(2) FEDERAL STOCK NUMBER	(3) DESCRIPTION REFERENCE NUMBER & MFR. CODE / USABLE ON CODE	(4) UNIT OF MEAS	(5) QTY INC IN UNIT	(6) 30-DAY DS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(7) 30-DAY GS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(8) 1 YR ALW PER 100 EQUIP CNTGCY	(9) DEPOT MAINT ALW PER 100 EQUIP	(10) ILLUSTRATIONS (a) FIG NO.	(b) ITEM NO. OR REFERENCE DESIGNATION
	5305-727-8833	....SCREW, MACHINE: MS51959-3 (96906)	EA	2				REF	REF	REF	REF	REF	13	A3A1A4W2H2
	5310-271-4640	....NUT, PLAIN, HEXAGON: MS35649-24 (96906)	EA	2				REF	REF	REF	REF	REF	13	A3A1A4W2H2
P--H	5935-226-3406	.....CONNECTOR, RECEPTACLE: GX6-20P (95238)	EA	1				REF	REF	REF	REF	REF	13	A3A1A4W2J506
P--H	5935-901-7026	.....CONNECTOR, RECEPTACLE: JF3S1PACD (81312)	EA	1				2	2	2	33	20	13	A3A1A4W2P507
P--H	5950-226-4211	....COIL, RF: SMC549684 (70117)	EA	4				2	2	2	89	65	13	A3A1A4L503
P--H	5950-226-4211	....COIL, RF: SMC549684 (70117)	EA	REF				REF	REF	REF	REF	REF	13	A3A1A4L504
P--H	5950-226-4211	....COIL, RF: SMC549684 (70117)	EA	REF				REF	REF	REF	REF	REF	13	A3A1A4L505
P--H	5950-226-4211	....COIL, RF: SMC549684 (70117)	EA	REF				REF	REF	REF	REF	REF	13	A3A1A4L506
P--H	5950-226-4212	....COIL, RF: SMC549689 (70117)	EA	2				*	2	2	27	15	13	A3A1A4L501
P--H	5950-226-4212	....COIL, RF: SMC549689 (70117)	EA	REF				REF	REF	REF	REF	REF	13	A3A1A4L502
P--H	5950-226-4210	....CORE, ADJUSTABLE TUNING: 50-3561-0 (92054)	EA	6				2	2	2	71	50	12	A3A1A4E2
P--H	5950-226-4210	....CORE, ADJUSTABLE TUNING: 50-3561-0 (92054)	EA	REF				REF	REF	REF	REF	REF	12	A3A1A4E3
P--H	5950-226-4210	....CORE, ADJUSTABLE TUNING: 50-3561-0 (92054)	EA	REF				REF	REF	REF	REF	REF	12	A3A1A4E4
P--H	5950-226-4210	....CORE, ADJUSTABLE TUNING: 50-3561-0 (92054)	EA	REF				REF	REF	REF	REF	REF	12	A3A1A4E5
P--H	5950-226-4210	....CORE, ADJUSTABLE TUNING: 50-3561-0 (92054)	EA	REF				REF	REF	REF	REF	REF	12	A3A1A4E6
P--H	5950-226-4210	....CORE, ADJUSTABLE TUNING: 50-3561-0 (92054)	EA	REF				REF	REF	REF	REF	REF	12	A3A1A4E7
MD-H		....COVER: SMD549922 (70117)	EA	1									4	A3A1A4MP1
	5305-727-8833	....SCREW, MACHINE: MS51959-3 (96906)	EA	4				REF	REF	REF	REF	REF	4	A3A1A4MP1H4
P--H	5950-781-1439	....SHIELD, COIL: SMB549940 (70117)	EA	6				*	2	2	19	10	12	A3A1A4E8
P--H	5950-781-1439	....SHIELD, COIL: SMB549940 (70117)	EA	REF				REF	REF	REF	REF	REF	12	A3A1A4E9
P--H	5950-781-1439	....SHIELD, COIL: SMB549940 (70117)	EA	REF				REF	REF	REF	REF	REF	12	A3A1A4E10
P--H	5950-781-1439	....SHIELD, COIL: SMB549940 (70117)	EA	REF				REF	REF	REF	REF	REF	12	A3A1A4E11
P--H	5950-781-1439	....SHIELD, COIL: SMB549940 (70117)	EA	REF				REF	REF	REF	REF	REF	12	A3A1A4E12
P--H	5950-781-1439	....SHIELD, COIL: SMB549940 (70117)	EA	REF				REF	REF	REF	REF	REF	12	A3A1A4E13
MD-H		....STRAP, RETAINING: SMB549775 (70117)	EA	4									12	A3A1A4MP2

(1) SMR CODE	(2) FEDERAL STOCK NUMBER	(3) DESCRIPTION REFERENCE NUMBER & MFR. CODE / USABLE ON CODE	(4) UNIT OF MEAS	(5) QTY INC IN UNIT	(6) 30-DAY DS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(7) 30-DAY GS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(8) 1 YR ALW PER 100 EQUIP CNTGCY	(9) DEPOT MAINT ALW PER 100 EQUIP	(10) ILLUSTRATIONS (a) FIG NO.	(b) ITEM NO. OR REFERENCE DESIGNATION
	5310-275-0889	....NUT, PLAIN, HEXAGON: 313-0132-00 (13499)	EA	1				REF	REF	REF	REF	REF	12	A3A1A4MP2H1
	5305-770-2533	....SCREW, MACHINE: MS51959-13 (96906)	EA	1				REF	REF	REF	REF	REF	12	A3A1A4MP2H1
	5310-042-9609	....WASHER, LOCK: MS35338-78 (96906)	EA	1				REF	REF	REF	REF	REF	12	A3A1A4MP2H1
MD-H		....STRAP, RETAINING: SMB549775 (70117)	EA	REF									13	A3A1A4MP3
	5305-054-5646	....SCREW, MACHINE: MS51957-12 (96906)	EA	1				REF	REF	REF	REF	REF	13	A3A1A4MP3H1
MD-H		....STRAP, RETAINING: SMB549775 (70117)	EA	REF									13	A3A1A4MP4
MD-H		....STRAP, RETAINING: SMB549775 (70117)	EA	REF									13	A3A1A4MP5
P--H	5940-836-3536	....TERMINAL, LUG: 4040-2HOTTINNED (77147)	EA	4				REF	REF	REF	REF	REF	12	A3A1A4E14
	5305-762-7482	....SCREW, MACHINE: MS35206-202 (96906)	EA	2				REF	REF	REF	REF	REF	12	A3A1A4E14H2
	5310-261-7352	....WASHER, LOCK: 1902-00 (78189)	EA	2				REF	REF	REF	REF	REF	12	A3A1A4E14H2
		VARIABLE IF SUBASSEMBLY:	EA	1									12	A3A1A4A1
P--H	3110-226-4277	.....BEARING, BALL: SMC549937-5 (70117)	EA	4				2	2	3	141	110	12	A3A1A4A1MP1
P--H	3110-226-4277	.....BEARING, BALL: SMC549937-5 (70117)	EA	REF				REF	REF	REF	REF	REF	12	A3A1A4A1MP2
P--H	3110-226-4277	.....BEARING, BALL: SMC549937-5 (70117)	EA	REF				REF	REF	REF	REF	REF	12	A3A1A4A1MP3
P--H	3110-226-4277	.....BEARING, BALL: SMC549937-5 (70117)	EA	REF				REF	REF	REF	REF	REF	12	A3A1A4A1MP4
P--H	3110-269-2274	.....BEARING, BALL: SMB549965 (70117)	EA	2				*	2	2	19	10	12	A3A1A4A1MP5
P--H	3110-269-2274	.....BEARING, BALL: SMB549965 (70117)	EA	REF				REF	REF	REF	REF	REF	12	A3A1A4A1MP6
P--H	5821-073-5388	.....CAM ASSEMBLY: SMD550081 (70117)	EA	1				*	2	2	19	10	12	A3A1A4A1A1
X1-H		.....CAM, LH: SMD549815-1 (70117)	EA	1										A3A1A4A1A1MP1
X1-H		.....CAM, RH: SMD549815-2 (70117)	EA	1										A3A1A4A1A1MP2
X1-H		.....GEAR, SPUR: SMC549730 (70117)	EA	1										A3A1A4A1A1MP3
X1-H		.....SCREW, MACHINE: SMB550149 (70117)	EA	3										A3A1A4A1A1MP3H3
X1-H		.....PIN, STRAIGHT, HEADLESS: MS16562-191 (96906)	EA	2										A3A1A4A1A1H1
X1-H		.....SHAFT: SMD549707 (70117)	EA	1										A3A1A4A1A1MP4
X1-H		.....CHASSIS ASSEMBLY: SMD550119 (70117)	EA	1										A3A1A4A1A2

(1) SMR CODE	(2) FEDERAL STOCK NUMBER	(3) DESCRIPTION REFERENCE NUMBER & MFR. CODE / USABLE ON CODE	(4) UNIT OF MEAS	(5) QTY INC IN UNIT	(6) 30-DAY DS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(7) 30-DAY GS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(8) 1 YR ALW PER 100 EQUIP CNTGCY	(9) DEPOT MAINT ALW PER 100 EQUIP	(10) ILLUSTRATIONS (a) FIG NO.	(b) ITEM NO. OR REFERENCE DESIGNATION
X1-H		.....CHASSIS: SMD549864 (70117)	EA	1										A3A1A4A1A2MP1
X1-H		.....PLATE ASSEMBLY: SMB549803 (70117)	EA	1										A3A1A4A1A2MP2
X1-H		.....SCREW, MACHINE: MS51957-14 (96906)	EA	4										A3A1A4A1A2MP2H4
X1-H		.....PLATE, CHASSIS: SMD549873 (70117)	EA	1										A3A1A4A1A2MP3
X1-H		.....SCREW, MACHINE: MS51959-13 (96906)	EA	4										A3A1A4A1A2MP3H4
X1-H		.....PIN, STRAIGHT HEADLESS: MS16555-602 (96906)	EA	2										A3A1A4A1A2H1
X1-H		.....PIN, STRAIGHT, HEADLESS: SMB550069 (70117)	EA	2										A3A1A4A1A2H2
X1-H		.....ROD, STRAIGHT, HEADLESS: SMB549780 (70117)	EA	2										A3A1A4A1A2MP4
X1-H		.....ROD, STRAIGHT, HEADLESS: SMB549780 (70117)	EA	REF										A3A1A4A1A2MP5
P--H	3020-073-8334	.....GEAR, SPUR: SMC549731 (70117)	EA	1				*	*	2	10	4	12	A3A1A4A1MP7
P--H	3020-073-8335	.....GEARSHAFT, SPUR: SMD549710 (70117)	EA	1				*	2	2	16	8	12	A3A1A4A1MP8
P--H-R	5821-073-9275	.....RACK ASSEMBLY: SMC549685 (70117)	EA	1				*	*	*	4	1	12	A3A1A4A1A3
P--H	3110-976-9744	.....BEARING: SMB549946 (70117)	EA	2				*	2	2	19	10	12	A3A1A4A1A3MP1
MD-H		.....BUSHING: SR144PP (83036)	EA	2									12	A3A1A4A1A3MP2
P--H	5315-825-1207	.....PIN, STRAIGHT, HEADLESS: MS16555-627 (96906)	EA	2				*	*	2	10	4	12	A3A1A4A1A3H1
P--H	5340-584-6620	.....RING, RETAINING: MS16632-1037 (96906)	EA	4				2	2	2	33	20	12	A3A1A4A1A3H2
P--H	5305-073-3280	.....SCREW, EXTERNAL RELIEF: SMB549761 (70117)	EA	6				2	2	2	71	50	12	A3A1A4A1A3H3
X1-H		.....SLUG RACK: SMD549883 (70117)	EA	1										A3A1A4A1A3MP3
MD		.....SPACER: SMB549747 (70117)	EA	2									12	A3A1A4A1A3H4
P--H	5821-226-7536	.....SPRING, HELICAL, EXTENSION: SMB549727 (70117)	EA	2				*	2	2	19	10	12	A3A1A4A1MP9
P--H	5821-226-7536	.....SPRING, HELICAL, EXTENSION: SMB549727 (70117)	EA	REF				REF	REF	REF	REF	REF	12	A3A1A4A1MP10
PH-F-S	5821-226-4263	....VARIABLE IF SUBASSEMBLY: SMD550114 (70117)	EA	1				*	*	*	5	2	14	A3A1A4A2
	5305-762-7482	....SCREW, MACHINE: MS35206-202 (96906)	EA	1				REF	REF	REF	REF	REF	12	A3A1A4A2H1
	5305-054-5648	....SCREW, MACHINE: MS51957-14 (96906)	EA	2				REF	REF	REF	REF	REF	12	A3A1A4A2H2
X1-H		.....BOARD, PC: SMD550298 (70117)	EA	1										A3A1A4A2E1

(1) SMR CODE	(2) FEDERAL STOCK NUMBER	(3) DESCRIPTION REFERENCE NUMBER & MFR. CODE / USABLE ON CODE	(4) UNIT OF MEAS	(5) QTY INC IN UNIT	(6) 30-DAY DS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(7) 30-DAY GS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(8) 1 YR ALW PER 100 EQUIP CNTGCY	(9) DEPOT MAINT ALW PER 100 EQUIP	(10) ILLUSTRATIONS (a) FIG NO.	(b) ITEM NO. OR REFERENCE DESIGNATION
P--H	5910-710-0022	.....CAPACITOR, FIXED, CERAMIC: CK14AX103M (81349)	EA	13				2	2	2	95	70	14	A3A1A4A2C501
P--H	5910-710-0022	.....CAPACITOR, FIXED, CERAMIC: CK14AX103M (81349)	EA	REF				REF	REF	REF	REF	REF	14	A3A1A4A2C507
P--H	5910-710-0022	.....CAPACITOR, FIXED, CERAMIC: CK14AX103M (81349)	EA	REF				REF	REF	REF	REF	REF	14	A3A1A4A2C515
P--H	5910-710-0022	.....CAPACITOR, FIXED, CERAMIC: CK14AX103M (81349)	EA	REF				REF	REF	REF	REF	REF	14	A3A1A4A2C516
P--H	5910-710-0022	.....CAPACITOR, FIXED, CERAMIC: CK14AX103M (81349)	EA	REF				REF	REF	REF	REF	REF	14	A3A1A4A2C517
P--H	5910-710-0022	.....CAPACITOR, FIXED, CERAMIC: CK14AX103M (81349)	EA	REF				REF	REF	REF	REF	REF	14	A3A1A4A2C520
P--H	5910-710-0022	.....CAPACITOR, FIXED, CERAMIC: CK14AX103M (81349)	EA	REF				REF	REF	REF	REF	REF	14	A3A1A4A2C521
P--H	5910-710-0022	.....CAPACITOR, FIXED, CERAMIC: CK14AX103M (81349)	EA	REF				REF	REF	REF	REF	REF	14	A3A1A4A2C522
P--H	5910-710-0022	.....CAPACITOR, FIXED, CERAMIC: CK14AX103M (81349)	EA	REF				REF	REF	REF	REF	REF	14	A3A1A4A2C535
P--H	5910-710-0022	.....CAPACITOR, FIXED, CERAMIC: CK14AX103M (81349)	EA	REF				REF	REF	REF	REF	REF	14	A3A1A4A2C536
P--H	5910-710-0022	.....CAPACITOR, FIXED, CERAMIC: CK14AX103M (81349)	EA	REF				REF	REF	REF	REF	REF	14	A3A1A4A2C537
P--H	5910-710-0022	.....CAPACITOR, FIXED, CERAMIC: CK14AX103M (81349)	EA	REF				REF	REF	REF	REF	REF	14	A3A1A4A2C538
P--H	5910-710-0022	.....CAPACITOR, FIXED, CERAMIC: CK14AX103M (81349)	EA	REF				REF	REF	REF	REF	REF	14	A3A1A4A2C539
P--H	5910-717-5853	.....CAPACITOR, FIXED, MICA: CM06F182J03 (81349)	EA	1				2	2	2	33	20	14	A3A1A4A2C532
P--H	5910-802-1499	.....CAPACITOR, FIXED, MICA: CM15D331G03 (81349)	EA	1				*	2	2	12	5	14	A3A1A4A2C534
P--H	5910-804-2369	.....CAPACITOR, FIXED, MICA: CM15D391G03 (81349)	EA	1				*	2	2	12	5	14	A3A1A4A2C533
P--H	5910-686-6126	.....CAPACITOR, FIXED, MICA: DM15F511J03 (84171)	EA	1				*	2	2	12	5	14	A3A1A4A2C506
P--H	5910-985-5184	.....CAPACITOR, FIXED, MICA: KHTCM20E182J500V (84171)	EA	2				2	2	2	46	30	14	A3A1A4A2C514
P--H	5910-985-5184	.....CAPACITOR, FIXED, MICA: KHTCM20E182J500V (84171)	EA	REF				REF	REF	REF	REF	REF	14	A3A1A4A2C531
P--H	5950-842-2247	.....COIL, RF: 2500-14 (99800)	EA	3				2	2	2	71	50	14	A3A1A4A2L507
P--H	5950-842-2247	.....COIL, RF: 2500-14 (99800)	EA	REF				REF	REF	REF	REF	REF	14	A3A1A4A2L508
P--H	5950-842-2247	.....COIL, RF: 2500-14 (99800)	EA	REF				REF	REF	REF	REF	REF	14	A3A1A4A2L509
P--H	5935-805-2535	.....CONNECTOR, RECEPTACLE: 31-59 (98278)	EA	2				2	2	2	59	40	14	A3A1A4A2J502
P--H	5935-805-2535	.....CONNECTOR, RECEPTACLE: 31-59 (98278)	EA	REF				REF	REF	REF	REF	REF	14	A3A1A4A2J503
P--H	5961-994-7742	.....PAD, MOUNTING: 10125 (07047)	EA	3				REF	REF	REF	REF	REF	14	A3A1A4A2MP1

(1) SMR CODE	(2) FEDERAL STOCK NUMBER	(3) DESCRIPTION REFERENCE NUMBER & MFR. CODE	USABLE ON CODE	(4) UNIT OF MEAS	(5) QTY INC IN UNIT	(6) 30-DAY DS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(7) 30-DAY GS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(8) 1 YR ALWPER 100 EQUIP CNTGCY	(9) DEPOT MAINT ALWPER 100 EQUIP	(10) ILLUSTRATIONS (a) FIG NO.	(b) ITEM NO. OR REFERENCE DESIGNATION
P--H	5905-681-6462	.....RESISTOR, FIXED, COMPOSITION: RC07GF102J (81349)		EA	1				*	2	2	12	5	14	A3A1A4A2R510
P--H	5905-683-2238	.....RESISTOR, FIXED, COMPOSITION: RC07GF103J (81349)		EA	3				REF	REF	REF	REF	REF	14	A3A1A4A2R518
P--H	5905-683-2238	.....RESISTOR, FIXED, COMPOSITION: RC07GF103J (81349)		EA	REF				REF	REF	REF	REF	REF	14	A3A1A4A2R521
P--H	5905-683-2238	.....RESISTOR, FIXED, COMPOSITION: RC07GF103J (81349)		EA	REF				REF	REF	REF	REF	REF	14	A3A1A4A2R525
P--H	5905-683-2243	.....RESISTOR, FIXED, COMPOSITION: RC07GF151J (81349)		EA	1				*	2	2	19	10	14	A3A1A4A2R508
P--H	5905-683-2240	.....RESISTOR, FIXED, COMPOSITION: RC07GF221J (81349)		EA	1				*	2	2	12	5	14	A3A1A4A2R501
P--H	5905-723-5251	.....RESISTOR, FIXED, COMPOSITION: RC07GF222J (81349)		EA	1				REF	REF	REF	REF	REF	14	A3A1A4A2R524
P--H	5905-682-4098	.....RESISTOR, FIXED, COMPOSITION: RC07GF392J (81349)		EA	1				*	2	2	27	15	14	A3A1A4A2R505
P--H	5905-802-6730	.....RESISTOR, FIXED, COMPOSITION: RC07GF470J (81349)		EA	1				*	2	2	19	10	14	A3A1A4A2R511
P--H	5905-686-9998	.....RESISTOR, FIXED, COMPOSITION: RC07GF472J (81349)		EA	3				REF	REF	REF	REF	REF	14	A3A1A4A2R506
P--H	5905-686-9998	.....RESISTOR, FIXED, COMPOSITION: RC07GF472J (81349)		EA	REF				REF	REF	REF	REF	REF	14	A3A1A4A2R509
P--H	5905-686-9998	.....RESISTOR, FIXED, COMPOSITION: RC07GF472J (81349)		EA	REF				REF	REF	REF	REF	REF	14	A3A1A4A2R522
P--H	5905-683-2246	.....RESISTOR, FIXED, COMPOSITION: RC07GF473J (81349)		EA	1				*	2	2	19	10	14	A3A1A4A2R519
P--H	5905-691-0195	.....RESISTOR, FIXED, COMPOSITION: RC07GF562J (81349)		EA	4				REF	REF	REF	REF	REF	14	A3A1A4A2R512
P--H	5905-691-0195	.....RESISTOR, FIXED, COMPOSITION: RC07GF562J (81349)		EA	REF				REF	REF	REF	REF	REF	14	A3A1A4A2R514
P--H	5905-691-0195	.....RESISTOR, FIXED, COMPOSITION: RC07GF562J (81349)		EA	REF				REF	REF	REF	REF	REF	14	A3A1A4A2R520
P--H	5905-691-0195	.....RESISTOR, FIXED, COMPOSITION: RC07GF562J (81349)		EA	REF				REF	REF	REF	REF	REF	14	A3A1A4A2R526
P--H	5905-683-2235	.....RESISTOR, FIXED, COMPOSITION: RC07GF680J (81349)		EA	2				*	2	2	27	15	14	A3A1A4A2R504
P--H	5905-683-2235	.....RESISTOR, FIXED, COMPOSITION: RC07GF680J (81349)		EA	REF				REF	REF	REF	REF	REF	14	A3A1A4A2R515
P--H	5905-686-9997	.....RESISTOR, FIXED, COMPOSITION: RC07GF682J (81349)		EA	2				REF	REF	REF	REF	REF	14	A3A1A4A2R503
P--H	5905-686-9997	.....RESISTOR, FIXED, COMPOSITION: RC07GF682J (81349)		EA	REF				REF	REF	REF	REF	REF	14	A3A1A4A2R516
P--H	5905-681-9970	.....RESISTOR, FIXED, COMPOSITION: RC07GF822J (81349)		EA	1				REF	REF	REF	REF	REF	14	A3A1A4A2R523
P--H	5905-969-5844	.....RESISTOR, FIXED, FILM: RN60D7151F (81349)		EA	1				*	2	2	12	5	14	A3A1A4A2R517
P--H	5960-615-0095	.....SEMICONDUCTOR, DIODE: 1N276 (81349)		EA	7				REF	REF	REF	REF	REF	14	A3A1A4A2CR501

(1) SMR CODE	(2) FEDERAL STOCK NUMBER	(3) DESCRIPTION REFERENCE NUMBER & MFR. CODE USABLE ON CODE	(4) UNIT OF MEAS	(5) QTY INC IN UNIT	(6) 30-DAY DS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(7) 30-DAY GS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(8) 1 YR ALW PER 100 EQUIP CNTGCY	(9) DEPOT MAINT ALW PER 100 EQUIP	(10) ILLUSTRATIONS (a) FIG NO.	(b) ITEM NO. OR REFERENCE DESIGNATION
P--H	5960-615-0095	.....SEMICONDUCTOR, DIODE: 1N276 (81349)	EA	REF				REF	REF	REF	REF	REF	14	A3A1A4A2CR502
P--H	5960-615-0095	.....SEMICONDUCTOR, DIODE: 1N276 (81349)	EA	REF				REF	REF	REF	REF	REF	14	A3A1A4A2CR503
P--H	5960-615-0095	.....SEMICONDUCTOR, DIODE: 1N276 (81349)	EA	REF				REF	REF	REF	REF	REF	14	A3A1A4A2CR504
P--H	5960-615-0095	.....SEMICONDUCTOR, DIODE: 1N276 (81349)	EA	REF				REF	REF	REF	REF	REF	14	A3A1A4A2CR505
P--H	5960-615-0095	.....SEMICONDUCTOR, DIODE: 1N276 (81349)	EA	REF				REF	REF	REF	REF	REF	14	A3A1A4A2CR506
P--H	5960-615-0095	.....SEMICONDUCTOR, DIODE: 1N276 (81349)	EA	REF				REF	REF	REF	REF	REF	14	A3A1A4A2CR507
P--H	5961-882-4244	.....TRANSISTOR: 2N1225 (81349)	EA	3				REF	REF	REF	REF	REF	14	A3A1A4A2Q501
P--H	5961-882-4244	.....TRANSISTOR: 2N1225 (81349)	EA	REF				REF	REF	REF	REF	REF	14	A3A1A4A2Q502
P--H	5961-882-4244	.....TRANSISTOR: 2N1225 (81349)	EA	REF				REF	REF	REF	REF	REF	14	A3A1A4A2Q503
PH-F-S	5821-226-4267	....VARIABLE IF SUBASSEMBLY: SMD550115 (70117)	EA	1				*	*	*	5	2	15	A3A1A4A3
	5305-762-7482	....SCREW, MACHINE: MS35206-202 (96906)	EA	3				REF	REF	REF	REF	REF	12	A3A1A4A3H3
	5305-054-5648	....SCREW, MACHINE: MS51957-14 (96906)	EA	2				REF	REF	REF	REF	REF	12	A3A1A4A3H2
X1-H		.....BOARD, PC: SMD550295 (70117)	EA	1										A3A1A4A3E1
X1-H		.....CAPACITOR, FIXED, CERAMIC: 8121-034U1G0510G (72982)	EA	4									15	A3A1A4A3C505
X1-H		.....CAPACITOR, FIXED, CERAMIC: 8121-034U1G0510G (72982)	EA	REF									15	A3A1A4A3C509
X1-H		.....CAPACITOR, FIXED, CERAMIC: 8121-034U1G0510G (72982)	EA	REF									15	A3A1A4A3C524
X1-H		.....CAPACITOR, FIXED, CERAMIC: 8121-034U1G0510G (72982)	EA	REF									15	A3A1A4A3C526
X1-H		.....CAPACITOR, FIXED, CERAMIC: 8131-037U1G0101J (72982)	EA	4									15	A3A1A4A3C503
X1-H		.....CAPACITOR, FIXED, CERAMIC: 8131-037U1G0101J (72982)	EA	REF									15	A3A1A4A3C511
X1-H		.....CAPACITOR, FIXED, CERAMIC: 8131-037U1G0101J (72982)	EA	REF									15	A3A1A4A3C519
X1-H		.....CAPACITOR, FIXED, CERAMIC: 8131-037U1G0101J (72982)	EA	REF									15	A3A1A4A3C528
P--H	5910-965-5484	.....CAPACITOR, FIXED, MICA: DM15C100J01 (84171)	EA	2				*	2	2	19	10	15	A3A1A4A3C513
P--H	5910-965-5484	.....CAPACITOR, FIXED, MICA: DM15C100J01 (84171)	EA	REF				REF	REF	REF	REF	REF	15	A3A1A4A3C530
P--H	5910-985-5184	.....CAPACITOR, FIXED, MICA: KHTCM20E182J500V (84171)	EA	4				REF	REF	REF	REF	REF	15	A3A1A4A3C504

(1) SMR CODE	(2) FEDERAL STOCK NUMBER	(3) DESCRIPTION REFERENCE NUMBER & MFR. CODE / USABLE ON CODE	(4) UNIT OF MEAS	(5) QTY INC IN UNIT	(6) 30-DAY DS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(7) 30-DAY GS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(8) 1 YR ALW PER 100 EQUIP CNTGCY	(9) DEPOT MAINT ALW PER 100 EQUIP	(10) ILLUSTRATIONS (a) FIG NO.	(b) ITEM NO. OR REFERENCE DESIGNATION
P--H	5910-985-5184	.....CAPACITOR, FIXED, MICA: KHTCM20E182J500V (84171)	EA	REF				REF	REF	REF	REF	REF	15	A3A1A4A3C510
P--H	5910-985-5184	.....CAPACITOR, FIXED, MICA: KHTCM20E182J500V (84171)	EA	REF				REF	REF	REF	REF	REF	15	A3A1A4A3C523
P--H	5910-985-5184	.....CAPACITOR, FIXED, MICA: KHTCM20E182J500V (84171)	EA	REF				REF	REF	REF	REF	REF	15	A3A1A4A3C527
P--H	5910-835-0718	.....CAPACITOR, VARIABLE: VC31GW (73899)	EA	6				2	2	2	46	30	15	A3A1A4A3C502
P--H	5910-835-0718	.....CAPACITOR, VARIABLE: VC31GW (73899)	EA	REF				REF	REF	REF	REF	REF	15	A3A1A4A3C508
P--H	5910-835-0718	.....CAPACITOR, VARIABLE: VC31GW (73899)	EA	REF				REF	REF	REF	REF	REF	15	A3A1A4A3C512
P--H	5910-835-0718	.....CAPACITOR, VARIABLE: VC31GW (73899)	EA	REF				REF	REF	REF	REF	REF	15	A3A1A4A3C518
P--H	5910-835-0718	.....CAPACITOR, VARIABLE: VC31GW (73899)	EA	REF				REF	REF	REF	REF	REF	15	A3A1A4A3C525
P--H	5910-835-0718	.....CAPACITOR, VARIABLE: VC31GW (73899)	EA	REF				REF	REF	REF	REF	REF	15	A3A1A4A3C529
P--H	5905-683-2238	.....RESISTOR, FIXED, COMPOSITION: RC07GF103J (81349)	EA	1				REF	REF	REF	REF	REF	15	A3A1A4A3R513
P--H	5905-681-9970	.....RESISTOR, FIXED, COMPOSITION: RC07GF822J (81349)	EA	1				REF	REF	REF	REF	REF	15	A3A1A4A3R507
P--D	5821-226-4261	....VARIABLE IF SUBASSEMBLY: SMD550178 (70117)	EA	1								2	13	A3A1A4A4
	5305-054-5640	....SCREW, MACHINE: MS51957-6 (96906)	EA	4				*	*	*	*	.*	13	A3A1A4A4H4
KL-H		.....BOARD, PC: SMD550299 (70117)	EA	1										A3A1A4A4E1
P--H	5935-805-2535	.....CONNECTOR, RECEPTACLE: 31-59 (98278)	EA	2				REF	REF	REF	REF	REF	13	A3A1A4A4J501
P--H	5935-805-2535	.....CONNECTOR, RECEPTACLE: 31-59 (98278)	EA	REF				REF	REF	REF	REF	REF	13	A3A1A4A4J504
P--H	5905-726-6441	.....RESISTOR, FIXED, COMPOSITION: RC07GF561K (81349)	EA	1				2	2	2	46	30	13	A3A1A4A4R502
MD-H		.....TERMINAL, STUD: FS2816-3 (71279)	EA	6									13	A3A1A4A4E2
PH-F-S	5821-730-2633	...LOW FREQUENCY OSCILLATOR: SMD549675 (70117)	EA	1				*	*	*	5	2	4	A3A1A5
	5305-207-7468	...SCREW, MACHINE: MS35214-16 (96906)	EA	3				*	*	*	*	*	4	A3A1A5H3
P--H		...SETSCREW: SMB550151-2 (70117)	EA	1				REF	REF	REF	REF	REF	4	A3A1A5H1
P--H	3110-878-6499	....BEARING, BALL: SMC549937-4 (70117)	EA	2				2	2	3	118	90	16	A3A1A5MP1
P--H	3110-878-6499	....BEARING, BALL: SMC549937-4 (70117)	EA	REF				REF	REF	REF	REF	REF	16	A3A1A5MP2
P--H	5935-892-9682	....CONNECTOR, PLUG: JF3P1SACD (81312)	EA	1				2	2	2	33	20	16	A3A1A5J402
	5305-763-3356	....SCREW, MACHINE: MS51959-5 (96906)	EA	1				REF	REF	REF	REF	REF	16	A3A1A5J402H1

(1) SMR CODE	(2) FEDERAL STOCK NUMBER	(3) DESCRIPTION REFERENCE NUMBER & MFR. CODE USABLE ON CODE	(4) UNIT OF MEAS	(5) QTY INC IN UNIT	(6) 30-DAY DS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(7) 30-DAY GS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(8) 1 YR ALW PER 100 EQUIP CNTGCY	(9) DEPOT MAINT ALW PER 100 EQUIP	(10) ILLUSTRATIONS (a) FIG NO.	(b) ITEM NO. OR REFERENCE DESIGNATION
P--D		....CONNECTOR, RECEPTACLE: 33-42A1B8 (98278)	EA	1								*	16	A3A1A5J401
MD-H		....COVER: SMC549753-1 (70117)	EA	1									16	A3A1A5MP3
	5305-054-5644	....SCREW, MACHINE: MS51957-11 (96906)	EA	4				*	*	*	*	*	16	A3A1A5MP3H4
P--H	5915-848-7966	....FILTER, RADIO: SMFBA2 (01121)	EA	2				*	2	2	12	5	16	A3A1A5FL401
P--H	5915-848-7966	....FILTER, RADIO: SMFBA2 (01121)	EA	REF				REF	REF	REF	REF	REF	16	A3A1A5FL402
X1-H		....HOUSING: SMD549817 (70117)	EA	1										A3A1A5MP4
MD-H		....INSULATOR, WASHER: 9383 (73680)	EA	1									16	A3A1A5E1
P--D	5821-728-3123	....LOW FREQUENCY OSCILLATOR SUBASSEMBLY: SMD550126 (70117)	EA	1								2	16	A3A1A5A1
X1-H		.....BOARD, PC: SMD550296 (70117)	EA	1										A3A1A5A1E1
P--H	5910-811-4783	.....CAPACITOR, FIXED, CERAMIC: CK06CW222M (81349)	EA	5				REF	REF	REF	REF	REF	17	A3A1A5A1C402
P--H	5910-811-4783	.....CAPACITOR, FIXED, CERAMIC: CK06CW222M (81349)	EA	REF				REF	REF	REF	REF	REF	17	A3A1A5A1C410
P--H	5910-811-4783	.....CAPACITOR, FIXED, CERAMIC: CK06CW222M (81349)	EA	REF				REF	REF	REF	REF	REF	17	A3A1A5A1C411
P--H	5910-811-4783	.....CAPACITOR, FIXED, CERAMIC: CK06CW222M (81349)	EA	REF				REF	REF	REF	REF	REF	17	A3A1A5A1C412
P--H	5910-811-4783	.....CAPACITOR, FIXED, CERAMIC: CK06CW222M (81349)	EA	REF				REF	REF	REF	REF	REF	17	A3A1A5A1C413
P--H	5910-067-7293	.....CAPACITOR, FIXED, MICA: CM05C050K03 (81349)	EA	1				*	2	2	12	5	17	A3A1A5A1C409
P--H	5910-051-4610	.....CAPACITOR, FIXED, MICA: CM05E680J03 (81349)	EA	1				*	2	2	19	10	17	A3A1A5A1C434
P--H	5910-825-3067	.....CAPACITOR, FIXED, MICA: CM05F111J03 (81349)	EA	1				*	2	2	19	10	17	A3A1A5A1C403
P--H	5910-060-1187	.....CAPACITOR, FIXED, MICA: CM05F161J03 (81349)	EA	2				*	2	2	19	10	17	A3A1A5A1C405
P--H	5910-060-1187	.....CAPACITOR, FIXED, MICA: CM05F161J03 (81349)	EA	REF				REF	REF	REF	REF	REF	17	A3A1A5A1C406
P--H	5910-954-7368	.....CAPACITOR, FIXED, MICA: CM05F241J03 (81349)	EA	2				*	2	2	19	10	17	A3A1A5A1C407
P--H	5910-954-7368	.....CAPACITOR, FIXED, MICA: CM05F241J03 (81349)	EA	REF				REF	REF	REF	REF	REF	17	A3A1A5A1C408
P--H	5910-894-0421	.....CAPACITOR, FIXED, MICA: DM15C150J01 (84171)	EA	1				*	2	2	12	5	17	A3A1A5A1C404
P--H	5910-683-7114	.....CAPACITOR, VARIABLE: NVC10GW (73899)	EA	1				*	2	2	12	5	17	A3A1A5A1C401
P--H	5950-728-5173	.....COIL, RF: BP1191 (99800)	EA	2				*	2	2	27	15	17	A3A1A5A1L401
P--H	5950-728-5173	.....COIL, RF: BP1191 (99800)	EA	REF				REF	REF	REF	REF	REF	17	A3A1A5A1L403

(1) SMR CODE	(2) FEDERAL STOCK NUMBER	(3) DESCRIPTION REFERENCE NUMBER & MFR. CODE	USABLE ON CODE	(4) UNIT OF MEAS	(5) QTY INC IN UNIT	(6) 30-DAY DS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(7) 30-DAY GS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(8) 1 YR ALW PER 100 EQUIP CNTGCY	(9) DEPOT MAINT ALW PER 100 EQUIP	(10) ILLUSTRATIONS (a) FIG NO.	(b) ITEM NO. OR REFERENCE DESIGNATION
P--H	5950-089-2077	.....COIL, RF: BP1192 (99800)		EA	1				*	2	2	16	8	17	A3A1A5A1L402
P--H	5950-027-2761	.....COIL, RF: 1537-52 (99800)		EA	2				*	2	2	27	15	17	A3A1A5A1L405
P--H	5950-027-2761	.....COIL, RF: 1537-52 (99800)		EA	REF				REF	REF	REF	REF	REF	17	A3A1A5A1L406
P--H	5950-842-2247	.....COIL, RF: 2500-14 (99800)		EA	1				REF	REF	REF	REF	REF	17	A3A1A5A1L404
P--H	5955-728-3604	.....CRYSTAL UNIT, QUARTZ: CR64U4475KC (81349)		EA	1				*	2	2	13	6	18	A3A1A5A1Y421
P--H	5955-728-3605	.....CRYSTAL UNIT, QUARTZ: CR64U4525KC (81349)		EA	1				*	2	2	13	6	18	A3A1A5A1Y422
P--H	5955-728-3607	.....CRYSTAL UNIT, QUARTZ: CR64U4575KC (81349)		EA	1				*	2	2	13	6	18	A3A1A5A1Y423
P--H	5955-728-3608	.....CRYSTAL UNIT, QUARTZ: CR64U4625KC (81349)		EA	1				*	2	2	13	6	18	A3A1A5A1Y424
P--H	5955-728-3609	.....CRYSTAL UNIT, QUARTZ: CR64U4675KC (81349)		EA	1				*	2	2	13	6	18	A3A1A5A1Y425
P--H	5955-728-3611	.....CRYSTAL UNIT, QUARTZ: CR64U4725KC (81349)		EA	1				*	2	2	13	6	18	A3A1A5A1Y426
P--H	5955-728-3601	.....CRYSTAL UNIT, QUARTZ: CR64U4775KC (81349)		EA	1				*	2	2	13	6	18	A3A1A5A1Y427
P--H	5955-728-3602	.....CRYSTAL UNIT, QUARTZ: CR64U4825KC (81349)		EA	1				*	2	2	13	6	18	A3A1A5A1Y428
P--H	5955-728-3603	.....CRYSTAL UNIT, QUARTZ: CR64U4875KC (81349)		EA	1				*	2	2	13	6	18	A3A1A5A1Y429
P--H	5955-728-3248	.....CRYSTAL UNIT, QUARTZ: CR64U4925KC (81349)		EA	1				*	2	2	13	6	18	A3A1A5A1Y430
P--H	5955-728-3250	.....CRYSTAL UNIT, QUARTZ: CR64U4975KC (81349)		EA	1				*	2	2	13	6	18	A3A1A5A1Y431
P--H	5955-728-3251	.....CRYSTAL UNIT, QUARTZ: CR64U5025KC (81349)		EA	1				*	2	2	13	6	18	A3A1A5A1Y432
P--H	5955-728-3252	.....CRYSTAL UNIT, QUARTZ: CR64U5075KC (81349)		EA	1				*	2	2	13	6	18	A3A1A5A1Y433
P--H	5955-728-3606	.....CRYSTAL UNIT, QUARTZ: CR64U5125KC (81349)		EA	1				*	2	2	13	6	18	A3A1A5A1Y434
P--H	5955-728-3649	.....CRYSTAL UNIT, QUARTZ: CR64U5175-000KC (81349)		EA	1				*	2	2	13	6	18	A3A1A5A1Y435
P--H	5955-728-3646	.....CRYSTAL UNIT, QUARTZ: CR64U5225-000KC (81349)		EA	1				*	2	2	13	6	18	A3A1A5A1Y436
P--H	5955-728-3647	.....CRYSTAL UNIT, QUARTZ: CR64U5275-000KC (81349)		EA	1				*	2	2	13	6	18	A3A1A5A1Y437
P--H	5955-728-3648	.....CRYSTAL UNIT, QUARTZ: CR64U5325-000KC (81349)		EA	1				*	2	2	13	6	18	A3A1A5A1Y438
P--H	5955-728-3112	.....CRYSTAL UNIT, QUARTZ: CR64U5375-000KC (81349)		EA	1				*	2	2	13	6	18	A3A1A5A1Y439
P--H	5955-728-3113	.....CRYSTAL UNIT, QUARTZ: CR64U5425-000KC (81349)		EA	1				*	2	2	13	6	18	A3A1A5A1Y440
MD-H		.....INSULATOR DISK SMB550063 (70117)		EA	1									17	A3A1A5A1E2

(1) SMR CODE	(2) FEDERAL STOCK NUMBER	(3) DESCRIPTION REFERENCE NUMBER & MFR. CODE USABLE ON CODE	(4) UNIT OF MEAS	(5) QTY INC IN UNIT	(6) 30-DAY DS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(7) 30-DAY GS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(8) 1 YR ALW PER 100 EQUIP CNTGCY	(9) DEPOT MAINT ALW PER 100 EQUIP	(10) ILLUSTRATIONS (a) FIG NO.	(b) ITEM NO. OR REFERENCE DESIGNATION
P--H	5970-756-8821	.....INSULATOR PLATE: SMB549840 (70117)	EA	20				2	3	5	242	200	18	A3A1A5A1E3
P--H	5905-726-4413	.....RESISTOR, FIXED, COMPOSITION: RC07GF123J (81349)	EA	1				*	2	2	19	10	17	A3A1A5A1R402
P--H	5905-683-2243	.....RESISTOR, FIXED, COMPOSITION: RC07GF151J (81349)	EA	1				REF	REF	REF	REF	REF	17	A3A1A5A1R406
P--H	5905-723-5251	.....RESISTOR, FIXED, COMPOSITION: RC07GF222J (81349)	EA	1				REF	REF	REF	REF	REF	17	A3A1A5A1R404
P--H	5905-686-3838	.....RESISTOR, FIXED, COMPOSITION: RC07GF273J (81349)	EA	1				REF	REF	REF	REF	REF	17	A3A1A5A1R403
P--H	5905-682-4098	.....RESISTOR, FIXED, COMPOSITION: RC07GF392J (81349)	EA	1				REF	REF	REF	REF	REF	17	A3A1A5A1R401
P--H	5905-683-2246	.....RESISTOR, FIXED, COMPOSITION: RC07GF473J (81349)	EA	1				REF	REF	REF	REF	REF	17	A3A1A5A1R405
P--H	5960-615-0095	.....SEMICONDUCTOR, DIODE: 1N276 (81349)	EA	1				REF	REF	REF	REF	REF	17	A3A1A5A1CR411
P--H	5961-686-8578	.....TRANSISTOR: 2N338 (81349)	EA	1				2	2	2	107	80	17	A3A1A5A1Q401
P--D	5821-728-3253	....LOW FREQUENCY OSCILLATOR SUBASSEMBLY: SMD550128 (70117)	EA	1								2	16	A3A1A5A2
	5305-054-5650	....SCREW, MACHINE: MS51957-16 (96906)	EA	2				REF	REF	REF	REF	REF	16	A3A1A5A2H2
X1-H		.....BOARD, PC: SMD550307 (70117)	EA	1										A3A1A5A2E1
X1-H		.....EYELET, METALLIC: SMB549869-2 (70117)	EA	1										A3A1A5A2H1
X1-H		.....EYELET, METALLIC: SE24 (90030)	EA	3										A3A1A5A2H2
X1-H		.....INSULATOR, BUSHING: SMB549733 (70117)	EA	1										A3A1A5A2E2
X1-H		.....ROTOR, ELECTRICAL, SWITCH: SMC549732 (70117)	EA	1										A3A1A5A2E3
X1-H		.....ROTOR, ELECTRICAL, SWITCH: SMC549808 (70117)	EA	2										A3A1A5A2E4
X1-H		.....ROTOR, ELECTRICAL, SWITCH: SMC549808 (70117)	EA	REF										A3A1A5A2E5
X1-H		.....WASHER, THRUST: SMC549734 (70117)	EA	2										A3A1A5A2H3
P--H	5821-790-7562	....POINTER: SMC549887 (70117)	EA	1				*	*	*	5	2	16	A3A1A5MP5
P--H	5961-837-9112	....SCREW, MACHINE: SMB550155-2 (70117)	EA	1				*	*	*	*	*	16	A3A1A5MP5H1
MD-H		....POST, ELECTRICAL: SMC549802-1 (70117)	EA	2									16	A3A1A5MP6
MD-H		....POST, ELECTRICAL: SMC549802-2 (70117)	EA	2									16	A3A1A5MP7
X1-H		....SHAFT, STRAIGHT: SMD549705 (70117)	EA	1										A3A1A5MP8
P--H	5340-931-3129	....SPACER, SLEEVE: SMB549935-2 (70117)	EA	4				*	2	2	27	15	16	A3A1A5MP9

(1) SMR CODE	(2) FEDERAL STOCK NUMBER	(3) DESCRIPTION REFERENCE NUMBER & MFR. CODE / USABLE ON CODE	(4) UNIT OF MEAS	(5) QTY INC IN UNIT	(6) 30-DAY DS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(7) 30-DAY GS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(8) 1 YR ALW PER 100 EQUIP CNTGCY	(9) DEPOT MAINT ALW PER 100 EQUIP	(10) ILLUSTRATIONS (a) FIG NO.	(b) ITEM NO. OR REFERENCE DESIGNATION
	5310-058-2951	....WASHER, LOCK: MS35337-81 (96906)	EA	1				*	*	*	*	*	16	A3A1A5H1
PH-F-S	5821-226-4194	...HIGH FREQUENCY OSCILLATOR: SMD549676 (70117)	EA	1				*	*	*	5	2	4	A3A1A6
	5305-763-7827	...SCREW, MACHINE: MS51957-18 (96906)	EA	4				*	*	*	*	*	4	A3A1A6H4
P--H		...SETSCREW: SMB550151-2 (70117)	EA	1				REF	REF	REF	REF	REF	4	A3A1A6H1
P--H	3110-226-4277	....BEARING: SMC549937-5 (70117)	EA	2				REF	REF	REF	REF	REF	19	A3A1A6MP1
P--H	3110-226-4277	....BEARING: SMC549937-5 (70117)	EA	REF				REF	REF	REF	REF	REF	19	A3A1A6MP2
P--H	5950-829-0177	....COIL, RF: MS16225-17 (96906)	EA	2				2	2	2	53	35	20	A3A1A6L302
P--H	5950-829-0177	....COIL, RF: MS16225-17 (96906)	EA	REF				REF	REF	REF	REF	REF	20	A3A1A6L304
P--H	5935-892-9682	....CONNECTOR, PLUG: JF31P1SACD (81312)	EA	1				REF	REF	REF	REF	REF	19	A3A1A6J302
	5305-763-3356	....SCREW, MACHINE: MS51959-5 (96906)	EA	1				REF	REF	REF	REF	REF	19	A3A1A6J302H1
P--D		....CONNECTOR, RECEPTACLE: 33-42A1B8 (98278)	EA	1								REF	19	A3A1A6J301
MD-H		....COVER: SMC549753-2 (70117)	EA	1									20	A3A1A6MP3
	5305-054-5644	....SCREW, MACHINE: MS51957-11 (96906)	EA	4				REF	REF	REF	REF	REF	4	A3A1A6MP3H4
P--D	5821-226-4199	....HIGH FREQUENCY OSCILLATOR SUBASSEMBLY: SMB550127 (70117)	EA	1								2	19	A3A1A6A1
X1-H		.....BOARD, PC: SMD550294 (70117)	EA	1										A3A1A6A1E1
P--H	5910-811-4783	.....CAPACITOR, FIXED, CERAMIC: CK06CW222M (81349)	EA	5				REF	REF	REF	REF	REF	20	A3A1A6A1C301
P--H	5910-811-4783	.....CAPACITOR, FIXED, CERAMIC: CK06CW222M (81349)	EA	REF				REF	REF	REF	REF	REF	20	A3A1A6A1C302
P--H	5910-811-4783	.....CAPACITOR, FIXED, CERAMIC: CK06CW222M (81349)	EA	REF				REF	REF	REF	REF	REF	20	A3A1A6A1C303
P--H	5910-811-4783	.....CAPACITOR, FIXED, CERAMIC: CK06CW222M (81349)	EA	REF				REF	REF	REF	REF	REF	20	A3A1A6A1C307
P--H	5910-811-4783	.....CAPACITOR, FIXED, CERAMIC: CK06CW222M (81349)	EA	REF				REF	REF	REF	REF	REF	20	A3A1A6A1C308
X1-H		.....CAPACITOR, FIXED, CERAMIC: 8111-038T2H0200G (72982)	EA	1									20	A3A1A6A1C305
X1-H		.....CAPACITOR, FIXED, CERAMIC: 8121-032U2J0131K (72982)	EA	1									20	A3A1A6A1C304
P--H	5910-812-8613	.....CAPACITOR, FIXED, GLASS: CY12C1R5C (81349)	EA	1				*	2	2	12	5	20	A3A1A6A1C306
P--H	5950-829-0177	.....COIL, RF: MS16225-17 (96906)	EA	2				REF	REF	REF	REF	REF	20	A3A1A6A1L301
P--H	5950-829-0177	.....COIL, RF: MS16225-17 (96906)	EA	REF				REF	REF	REF	REF	REF	20	A3A1A6A1L303

(1) SMR CODE	(2) FEDERAL STOCK NUMBER	(3) DESCRIPTION REFERENCE NUMBER & MFR. CODE / USABLE ON CODE	(4) UNIT OF MEAS	(5) QTY INC IN UNIT	(6) 30-DAY DS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(7) 30-DAY GS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(8) 1 YR ALWPER 100 EQUIP CNTGCY	(9) DEPOT MAINT ALWPER 100 EQUIP	(10) ILLUSTRATIONS (a) FIG NO.	(b) ITEM NO. OR REFERENCE DESIGNATION
X1-H		.....CRYSTAL UNIT, QUARTZ: CR55U26025-00KC (81349)	EA	1									19	A3A1A6A1Y301
X1-H		.....CRYSTAL UNIT, QUARTZ: CR55U28025-00KC (81349)	EA	1									19	A3A1A6A1Y302
X1-H		.....CRYSTAL UNIT, QUARTZ: CR55U30025-00KC (81349)	EA	1									19	A3A1A6A1Y303
P--H	5955-728-3111	.....CRYSTAL UNIT, QUARTZ: CR55U32025-00KC (81349)	EA	1				*	2	2	13	6	19	A3A1A6A1Y304
P--H	5955-730-2151	.....CRYSTAL UNIT, QUARTZ: CR55U34025-00KC (81349)	EA	1				*	2	2	13	6	19	A3A1A6A1Y305
X1-H		.....CRYSTAL UNIT, QUARTZ: CR55U36025-00KC (81349)	EA	1									19	A3A1A6A1Y306
P--H	5955-730-2210	.....CRYSTAL UNIT, QUARTZ: CR55U38025-00KC (81349)	EA	1				*	2	2	13	6	19	A3A1A6A1Y307
P--H	5955-730-2218	.....CRYSTAL UNIT, QUARTZ: CR55U40025-00KC (81349)	EA	1				*	2	2	13	6	19	A3A1A6A1Y308
X1-H		.....CRYSTAL UNIT, QUARTZ: CR55U42025-00KC (81349)	EA	1									19	A3A1A6A1Y309
P--H	5955-730-2463	.....CRYSTAL UNIT, QUARTZ: CR55U44025-00KC (81349)	EA	1				*	2	2	13	6	19	A3A1A6A1Y310
P--H	5955-730-2530	.....CRYSTAL UNIT, QUARTZ: CR55U46025-00KC (81349)	EA	1				*	2	2	13	6	19	A3A1A6A1Y311
P--H	5955-728-3109	.....CRYSTAL UNIT, QUARTZ: CR55U48025-00KC (81349)	EA	1				*	2	2	13	6	19	A3A1A6A1Y312
P--H	5955-728-3610	.....CRYSTAL UNIT, QUARTZ: CR55U50025-00KC (81349)	EA	1				*	2	2	13	6	19	A3A1A6A1Y313
P--H	5955-728-3612	.....CRYSTAL UNIT, QUARTZ: CR55U52025-00KC (81349)	EA	1				*	2	2	13	6	19	A3A1A6A1Y314
P--H	5955-728-3613	.....CRYSTAL UNIT, QUARTZ: CR55U54025-00KC (81349)	EA	1				*	2	2	13	6	19	A3A1A6A1Y315
P--H	5955-728-3614	.....CRYSTAL UNIT, QUARTZ: CR55U56025-00KC (81349)	EA	1				*	2	2	13	6	19	A3A1A6A1Y316
P--H	5955-728-3119	.....CRYSTAL UNIT, QUARTZ: CR55U58025-00KC (81349)	EA	1				*	2	2	13	6	19	A3A1A6A1Y317
X1-H		.....CRYSTAL UNIT, QUARTZ: CR55U60025-00KC (81349)	EA	1									19	A3A1A6A1Y318
X1-H		.....CRYSTAL UNIT, QUARTZ: CR55U62025-00KC (81349)	EA	1									19	A3A1A6A1Y319
X1-H		.....CRYSTAL UNIT, QUARTZ: CR55U64025-00KC (81349)	EA	1									19	A3A1A6A1Y320
P--H	5970-756-8821	.....INSULATOR PLATE: SMB549740 (70117)	EA	20				REF	REF	REF	REF	REF	19	A3A1A6A1E2
P--H	5905-686-4529	.....RESISTOR, FIXED, COMPOSITION: RC07GF123K (81349)	EA	1				REF	REF	REF	REF	REF	20	A3A1A6A1R304
P--H	5905-726-6433	.....RESISTOR, FIXED, COMPOSITION: RC07GF222K (81349)	EA	1				2	2	2	83	60	20	A3A1A6A1R305
P--H	5905-808-6135	.....RESISTOR, FIXED, COMPOSITION: RC07GF270J (81349)	EA	1				REF	REF	REF	REF	REF	20	A3A1A6A1R307
P--H	5905-682-4098	.....RESISTOR, FIXED, COMPOSITION: RC07GF392J (81349)	EA	1				REF	REF	REF	REF	REF	20	A3A1A6A1R302

(1) SMR CODE	(2) FEDERAL STOCK NUMBER	(3) DESCRIPTION REFERENCE NUMBER & MFR. CODE / USABLE ON CODE	(4) UNIT OF MEAS	(5) QTY INC IN UNIT	(6) 30-DAY DS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(7) 30-DAY GS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(8) 1 YR ALW PER 100 EQUIP CNTGCY	(9) DEPOT MAINT ALW PER 100 EQUIP	(10) ILLUSTRATIONS (a) FIG NO.	(b) ITEM NO. OR REFERENCE DESIGNATION
P--H	5905-726-6836	.....RESISTOR, FIXED, COMPOSITION: RC07GF680K (81349)	EA	1				*	2	2	12	5	20	A3A1A6A1R301
P--H	5905-642-0474	.....RESISTOR, FIXED, COMPOSITION: RC07GF682J (81349)	EA	1				REF	REF	REF	REF	REF	20	A3A1A6A1R303
P--H	5905-834-9874	.....RESISTOR, FIXED, COMPOSITION: RC07GF822K (81349)	EA	1				2	2	2	59	40	20	A3A1A6A1R306
P--H	5960-615-0095	.....SEMICONDUCTOR, DIODE: 1N276 (81349)	EA	1				REF	REF	REF	REF	REF	20	A3A1A6A1CR301
P--H	5961-902-8820	.....TRANSISTOR: 2N2996 (01295)	EA	1				REF	REF	REF	REF	REF	20	A3A1A6A1Q301
P--D	5821-221-4195	....HIGH FREQUENCY OSCILLATOR SUBASSEMBLY: SMD550130 (70117)	EA	1								2	19	A3A1A6A2
	5305-071-1317	....SCREW, MACHINE: MS51957-82 (96906)	EA	2				*	*	*	*	*	19	A3A1A6A2H2
X1-H		.....BOARD, PC: SMD550297 (70117)	EA	1										A3A1A6A2E1
P--H	5950-226-4162	.....COIL, RF: SMC550024-1 (70117)	EA	1				*	2	2	16	8	20	A3A1A6A2L305
P--H		.....SCREW, MACHINE: SMB550156-1 (70117)	EA	1				2	2	4	215	175	20	A3A1A6A2L305H1
P--H		.....WASHER, LOCK: .115 ID X .202 OD X SMB550141 (70117) .020 THK	EA	1				2	2	4	215	175	20	A3A1A6A2L305H1
P--H	5950-226-4160	.....COIL, RF: SMC550024-2 (70117)	EA	1				*	2	2	16	8	20	A3A1A6A2L306
P--H		.....SCREW, MACHINE: SMB550156-1 (70117)	EA	1				REF	REF	REF	REF	REF	20	A3A1A6A2L306H1
P--H		.....WASHER, LOCK: SMB550141 (70117)	EA	1				REF	REF	REF	REF	REF	20	A3A1A6A2L306H1
P--H	5950-226-4159	.....COIL, RF: SMC550024-3 (70117)	EA	1				*	2	2	16	8	20	A3A1A6A2L307
P--H		.....SCREW, MACHINE: SMB550156-1 (70117)	EA	1				REF	REF	REF	REF	REF	20	A3A1A6A2L307H1
P--H		.....WASHER, LOCK: SMB550141 (70117)	EA	1				REF	REF	REF	REF	REF	20	A3A1A6A2L307H1
P--H	5950-226-4637	.....COIL, RF: SMC550024-4 (70117)	EA	1				*	2	2	16	8	20	A3A1A6A2L308
P--H		.....SCREW, MACHINE: SMB550156-1 (70117)	EA	1				REF	REF	REF	REF	REF	20	A3A1A6A2L308H1
P--H		.....WASHER, LOCK: SMB550141 (70117)	EA	1				REF	REF	REF	REF	REF	20	A3A1A6A2L308H1
P--H	5950-226-4161	.....COIL, RF: SMC550024-5 (70117)	EA	1				*	2	2	16	8	20	A3A1A6A2L309
P--H		.....SCREW, MACHINE: SMB550156-1 (70117)	EA	1				REF	REF	REF	REF	REF	20	A3A1A6A2L309H1
P--H		.....WASHER, LOCK: SMB550141 (70117)	EA	1				REF	REF	REF	REF	REF	20	A3A1A6A2L309H1
P--H	5950-226-4157	.....COIL, RF: SMC550024-6 (70117)	EA	1				*	2	2	16	8	20	A3A1A6A2L310
P--H		.....SCREW, MACHINE: SMB550156-1 (70117)	EA	1				REF	REF	REF	REF	REF	20	A3A1A6A2L310H1

(1) SMR CODE	(2) FEDERAL STOCK NUMBER	(3) DESCRIPTION REFERENCE NUMBER & MFR. CODE / USABLE ON CODE	(4) UNIT OF MEAS	(5) QTY INC IN UNIT	(6) 30-DAY DS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(7) 30-DAY GS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(8) 1 YR ALW PER 100 EQUIP CNTGCY	(9) DEPOT MAINT ALW PER 100 EQUIP	(10) ILLUSTRATIONS (a) FIG NO.	(b) ITEM NO. OR REFERENCE DESIGNATION
P--H		.....WASHER, LOCK: SMB550141 (70117)	EA	1				REF	REF	REF	REF	REF	20	A3A1A6A2L310H1
P--H	5950-226-4158	.....COIL, RF: SMC550024-7 (70117)	EA	1				*	2	2	16	8	20	A3A1A6A2L311
P--H		.....SCREW, MACHINE: SMB550156-1 (70117)	EA	1				REF	REF	REF	REF	REF	20	A3A1A6A2L311H1
P--H		.....WASHER, LOCK: SMB550141 (70117)	EA	1				REF	REF	REF	REF	REF	20	A3A1A6A2L311H1
P--H	5950-226-3413	.....COIL, RF: SMC550024-8 (70117)	EA	1				*	2	2	16	8	20	A3A1A6A2L312
P--H		.....SCREW, MACHINE: SMB550156-1 (70117)	EA	1				REF	REF	REF	REF	REF	20	A3A1A6A2L312H1
P--H		.....WASHER, LOCK: SMB550141 (70117)	EA	1				REF	REF	REF	REF	REF	20	A3A1A6A2L312H1
P--H	5950-226-4207	.....COIL, RF: SMC550024-9 (70117)	EA	1				*	2	2	16	8	20	A3A1A6A2L313
P--H		.....SCREW, MACHINE: SMB550156-1 (70117)	EA	1				REF	REF	REF	REF	REF	20	A3A1A6A2L313H1
P--H		.....WASHER, LOCK: SMB550141 (70117)	EA	1				REF	REF	REF	REF	REF	20	A3A1A6A2L313H1
P--H	5950-824-3607	.....COIL, RF: SMC550024-10 (70117)	EA	1				*	2	2	16	8	20	A3A1A6A2L314
P--H		.....SCREW, MACHINE: SMB550156-1 (70117)	EA	1				REF	REF	REF	REF	REF	20	A3A1A6A2L314H1
P--H		.....WASHER, LOCK: SMB550141 (70117)	EA	1				REF	REF	REF	REF	REF	20	A3A1A6A2L314H1
P--H	5950-824-3608	.....COIL, RF: SMC550024-11 (70117)	EA	1				*	2	2	16	8	20	A3A1A6A2L315
P--H		.....SCREW, MACHINE: SMB550156-1 (70117)	EA	1				REF	REF	REF	REF	REF	20	A3A1A6A2L315H1
P--H		.....WASHER, LOCK: SMB550141 (70117)	EA	1				REF	REF	REF	REF	REF	20	A3A1A6A2L315H1
P--H	5950-824-3609	.....COIL, RF: SMC550024-12 (70117)	EA	1				*	2	2	16	8	20	A3A1A6A2L316
P--H		.....SCREW, MACHINE: SMB550156-1 (70117)	EA	1				REF	REF	REF	REF	REF	20	A3A1A6A2L316H1
P--H		.....WASHER, LOCK: SMB550141 (70117)	EA	1				REF	REF	REF	REF	REF	20	A3A1A6A2L316H1
P--H	5950-824-3606	.....COIL, RF: SMC550024-13 (70117)	EA	1				*	2	2	16	8	20	A3A1A6A2L317
P--H		.....SCREW, MACHINE: SMB550156-1 (70117)	EA	1				REF	REF	REF	REF	REF	20	A3A1A6A2L317H1
P--H		.....WASHER, LOCK: SMB550141 (70117)	EA	1				REF	REF	REF	REF	REF	20	A3A1A6A2L317H1
P--H	5950-824-3605	.....COIL, RF: SMC550024-14 (70117)	EA	1				*	2	2	16	8	20	A3A1A6A2L318
P--H		.....SCREW, MACHINE: SMB550156-1 (70117)	EA	1				REF	REF	REF	REF	REF	20	A3A1A6A2L318H1
P--H		.....WASHER, LOCK: SMB550141 (70117)	EA	1				REF	REF	REF	REF	REF	20	A3A1A6A2L318H1

(1) SMR CODE	(2) FEDERAL STOCK NUMBER	(3) DESCRIPTION REFERENCE NUMBER & MFR. CODE / USABLE ON CODE	(4) UNIT OF MEAS	(5) QTY INC IN UNIT	(6) 30-DAY DS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(7) 30-DAY GS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(8) 1 YR ALW PER 100 EQUIP CNTGCY	(9) DEPOT MAINT ALW PER 100 EQUIP	(10) ILLUSTRATIONS (a) FIG NO.	(b) ITEM NO. OR REFERENCE DESIGNATION
P--H	5950-824-3604	.....COIL, RF: SMC550024-15 (70117)	EA	1				*	2	2	16	8	20	A3A1A6A2L319
P--H		.....SCREW, MACHINE: SMB550156-1 (70117)	EA	1				REF	REF	REF	REF	REF	20	A3A1A6A2L319H1
P--H		.....WASHER, LOCK: SMB550141 (70117)	EA	1				REF	REF	REF	REF	REF	20	A3A1A6A2L319H1
P--H	5920-824-3603	.....COIL, RF: SMC550024-16 (70117)	EA	1				*	2	2	16	8	20	A3A1A6A2L320
P--H		.....SCREW, MACHINE: SMB550156-1 (70117)	EA	1				REF	REF	REF	REF	REF	20	A3A1A6A2L320H1
P--H		.....WASHER, LOCK: SMB550141 (70117)	EA	1				REF	REF	REF	REF	REF	20	A3A1A6A2L320H1
P--H	5950-901-1961	.....COIL, RF: SMC550024-17 (70117)	EA	1				*	2	2	16	8	20	A3A1A6A2L321
P--H		.....SCREW, MACHINE: SMB550156-1 (70117)	EA	1				REF	REF	REF	REF	REF	20	A3A1A6A2L321H1
P--H		.....WASHER, LOCK: SMB550141 (70117)	EA	1				REF	REF	REF	REF	REF	20	A3A1A6A2L321H1
P--H	5950-226-4214	.....COIL, RF: SMC550024-18 (70117)	EA	1				*	2	2	16	8	20	A3A1A6A2L322
P--H		.....SCREW, MACHINE: SMB550156-1 (70117)	EA	1				REF	REF	REF	REF	REF	20	A3A1A6A2L322H1
P--H		.....WASHER, LOCK: SMB550141 (70117)	EA	1				REF	REF	REF	REF	REF	20	A3A1A6A2L322H1
P--H		.....COIL, RF: SMC550024-19 (70117)	EA	1				*	2	2	16	8	20	A3A1A6A2L323
P--H		.....SCREW, MACHINE: SMB550156-1 (70117)	EA	1				REF	REF	REF	REF	REF	20	A3A1A6A2L323H1
P--H		.....WASHER, LOCK: SMB550141 (70117)	EA	1				REF	REF	REF	REF	REF	20	A3A1A6A2L323H1
P--H	5950-226-3414	.....COIL, RF: SMC550024-20 (70117)	EA	1				*	2	2	16	8	20	A3A1A6A2L324
P--H		.....SCREW, MACHINE: SMB550156-1 (70117)	EA	1				REF	REF	REF	REF	REF	20	A3A1A6A2L324H1
P--H		.....WASHER, LOCK: SMB550141 (70117)	EA	1				REF	REF	REF	REF	REF	20	A3A1A6A2L324H1
X1-H		....HOUSING: SMD549816 (70117)	EA	1										A3A1A6MP4
MD-H		....INSULATOR, WASHER: 9383 (73680)	EA	1									20	A3A1A6E1
X1-H		....PLATE, SHAFT: SMC549906 (70117)	EA	1									19	A3A1A6MP5
P--H		....SCREW, MACHINE: SMB550149 (70117)	EA	3				2	2	3	130	100	19	A3A1A6MP5H3
MD-H		....POST, ELECTRICAL: SMC549802-3 (70117)	EA	2									19	A3A1A6MP6
MD-H		....POST, ELECTRICAL: SMC549802-4 (70117)	EA	2									19	A3A1A6MP7
P--H	5340-282-0782	....RING, RETAINING: 5100-25C (79136)	EA	1				*	2	2	12	5	19	A3A1A6H1

(1) SMR CODE	(2) FEDERAL STOCK NUMBER	(3) DESCRIPTION REFERENCE NUMBER & MFR. CODE / USABLE ON CODE	(4) UNIT OF MEAS	(5) QTY INC IN UNIT	(6) 30-DAY DS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(7) 30-DAY GS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(8) 1 YR ALW PER 100 EQUIP CNTGCY	(9) DEPOT MAINT ALW PER 100 EQUIP	(10) ILLUSTRATIONS (a) FIG NO.	(b) ITEM NO. OR REFERENCE DESIGNATION
X1-H		....SHAFT DISK: SMD549861 (70117)	EA	1									19	A3A1A6MP8
P--H	5340-865-5348	....SPACER, SLEEVE: SMB549935-3 (70117)	EA	4				*	2	2	27	15	19	A3A1A6MP9
	5310-058-2951	....WASHER, LOCK: MS35337-81 (96906)	EA	1				REF	REF	REF	REF	REF	19	A3A1A6H2
P--H-S	5821-728-3224	...RF CHASSIS SUBASSEMBLY: SMD550099 (70117)	EA	1				*	*	*	5	2	4	A3A1A7
A--H		....CABLE ASSEMBLY, SPECIAL: 516-2742-001 (70117)	EA	1									21	A3A1A7W1
	5305-954-3938	....SCREW, MACHINE: MS35206-207 (96906)	EA	2				*	*	*	*	*	21	A3A1A7W1H2
	5305-764-2966	....SCREW, MACHINE: MS51959-2 (96906)	EA	2				*	*	*	*	*	21	A3A1A7W1H2
P--H		....SCREW, MACHINE: SMB550158-3 (70117)	EA	2				*	2	2	27	15	21	A3A1A7W1H2
	5310-058-2950	....WASHER, LOCK: MS35337-77 (96906)	EA	2				REF	REF	REF	REF	REF	21	A3A1A7W1H2
P-H	5995-985-8125	.....CABLE ASSEMBLY, RF MINIATURE: SMB549989 (70117)	EA	1				*	*	*	*	*	21	A3A1A7W1W1
X1-H		......CONNECTOR, PLUG: L1431 (94875)	EA	1									21	A3A1A7W1W1P907
X1-H		......CONNECTOR, PLUG: L503 (94875)	EA	1									21	A3A1A7W1W1P906
P--H	5935-729-0685	.....CONNECTOR, RECEPTACLE: DBF25SC7 (91146)	EA	1				*	2	2	19	10	21	A3A1A7W1J901
P--H	5935-728-3238	.....CONNECTOR, RECEPTACLE: DC37PC7F151 (71468)	EA	1				*	2	2	19	10	21	A3A1A7W1P901
P--H	5935-728-3239	.....CONNECTOR, PLUG: GX6-20S (95238)	EA	3				2	2	2	59	40	21	A3A1A7W1P902
P--H	5935-728-3239	.....CONNECTOR, PLUG: GX6-20S (95238)	EA	REF				REF	REF	REF	REF	REF	21	A3A1A7W1P903
P--H	5935-728-3239	.....CONNECTOR, PLUG: GX6-20S (95238)	EA	REF				REF	REF	REF	REF	REF	21	A3A1A7W1P904
P--H	5935-901-7026	.....CONNECTOR, PLUG: JF3S1PACD (81312)	EA	1				REF	REF	REF	REF	REF	21	A3A1A7W1P905
P--H	5910-811-4783	.....CAPACITOR, FIXED, CERAMIC: CK06CW222M (81349)	EA	6				REF	REF	REF	REF	REF	21	A3A1A7C901
P--H	5910-811-4783	.....CAPACITOR, FIXED, CERAMIC: CK06CW222M (81349)	EA	REF				REF	REF	REF	REF	REF	21	A3A1A7C902
P--H	5910-811-4783	.....CAPACITOR, FIXED, CERAMIC: CK06CW222M (81349)	EA	REF				REF	REF	REF	REF	REF	21	A3A1A7C903
P--H	5910-811-4783	.....CAPACITOR, FIXED, CERAMIC: CK06CW222M (81349)	EA	REF				REF	REF	REF	REF	REF	21	A3A1A7C904
P--H	5910-811-4783	.....CAPACITOR, FIXED, CERAMIC: CK06CW222M (81349)	EA	REF				REF	REF	REF	REF	REF	21	A3A1A7C905
P--H	5910-811-4783	.....CAPACITOR, FIXED, CERAMIC: CK06CW222M (81349)	EA	REF				REF	REF	REF	REF	REF	21	A3A1A7C906
P--H	5935-073-3248	....HOLDER: SMB549884 (70117)	EA	1				*	*	2	10	4	21	A3A1A7MP1

(1) SMR CODE	(2) FEDERAL STOCK NUMBER	(3) DESCRIPTION REFERENCE NUMBER & MFR. CODE / USABLE ON CODE	(4) UNIT OF MEAS	(5) QTY INC IN UNIT	(6) 30-DAY DS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(7) 30-DAY GS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(8) 1 YR ALW PER 100 EQUIP CNTGCY	(9) DEPOT MAINT ALW PER 100 EQUIP	(10) ILLUSTRATIONS (a) FIG NO.	(b) ITEM NO. OR REFERENCE DESIGNATION
P--H		....SCREW, MACHINE:1-72 X 1/4 SLOT F SMB550163 (70117)	EA	2				*	2	2	27	15	21	A3A1A7MP1H2
MD-H		....INSULATOR, BUSHING: SMB549738 (70117)	EA	3				REF	REF	REF	REF	REF	21	A3A1A7E1
	5305-763-7822	....SCREW, MACHINE: MS51959-14 (96906)	EA	3				REF	REF	REF	REF	REF	21	A3A1A7E1H3
X1-H		....PLATE, BOTTOM: SMD550094 (70117)	EA	1										A3A1A7MP2
	5305-054-5646	....SCREW, MACHINE: MS51957-12 (96906)	EA	8				REF	REF	REF	REF	REF	4	A3A1A7MP2H8
P--H	5905-817-6440	....RESISTOR, FIXED, WIRE WOUND: RW59V271 (81349)	EA	1				*	2	2	19	10	21	A3A1A7R901
P--D	3020-758-0076	....RF CHASSIS: SMD550133 (70117)	EA	1								2	21	A3A1A7A1
P--H	3110-878-6499	.....BEARING: SMC549937-4 (70117)	EA	16				REF	REF	REF	REF	REF	22	A3A1A7A1MP1
P--H	3110-878-6499	.....BEARING: SMC549937-4 (70117)	EA	REF				REF	REF	REF	REF	REF	22	A3A1A7A1MP2
P--H	3110-878-6499	.....BEARING: SMC549937-4 (70117)	EA	REF				REF	REF	REF	REF	REF	22	A3A1A7A1MP3
P--H	3110-878-6499	.....BEARING: SMC549937-4 (70117)	EA	REF				REF	REF	REF	REF	REF	22	A3A1A7A1MP4
P--H	3110-878-6499	.....BEARING: SMC549937-4 (70117)	EA	REF				REF	REF	REF	REF	REF	22	A3A1A7A1MP5
P--H	3110-878-6499	.....BEARING: SMC549937-4 (70117)	EA	REF				REF	REF	REF	REF	REF	22	A3A1A7A1MP6
P--H	3110-878-6499	.....BEARING: SMC549937-4 (70117)	EA	REF				REF	REF	REF	REF	REF	22	A3A1A7A1MP7
P--H	3110-878-6499	.....BEARING: SMC549937-4 (70117)	EA	REF				REF	REF	REF	REF	REF	22	A3A1A7A1MP8
P--H	3110-878-6499	.....BEARING: SMC549937-4 (70117)	EA	REF				REF	REF	REF	REF	REF	22	A3A1A7A1MP9
P--H	3110-878-6499	.....BEARING: SMC549937-4 (70117)	EA	REF				REF	REF	REF	REF	REF	22	A3A1A7A1MP10
P--H	3110-878-6499	.....BEARING: SMC549937-4 (70117)	EA	REF				REF	REF	REF	REF	REF	22	A3A1A7A1MP11
P--H	3110-878-6499	.....BEARING: SMC549937-4 (70117)	EA	REF				REF	REF	REF	REF	REF	22	A3A1A7A1MP12
P--H	3110-878-6499	.....BEARING: SMC549937-4 (70117)	EA	REF				REF	REF	REF	REF	REF	22	A3A1A7A1MP13
P--H	3110-878-6499	.....BEARING: SMC549937-4 (70117)	EA	REF				REF	REF	REF	REF	REF	22	A3A1A7A1MP14
P--H	3110-878-6499	.....BEARING: SMC549937-4 (70117)	EA	REF				REF	REF	REF	REF	REF	22	A3A1A7A1MP15
P--H	3110-878-6499	.....BEARING: SMC549937-4 (70117)	EA	REF				REF	REF	REF	REF	REF	22	A3A1A7A1MP16
P--H	3110-226-4277	.....BEARING: SMC549937-5 (70117)	EA	16				REF	REF	REF	REF	REF	22	A3A1A7A1MP17
P--H	3110-226-4277	.....BEARING: SMC549937-5 (70117)	EA	REF				REF	REF	REF	REF	REF	22	A3A1A7A1MP18

(1) SMR CODE	(2) FEDERAL STOCK NUMBER	(3) DESCRIPTION REFERENCE NUMBER & MFR. CODE	USABLE ON CODE	(4) UNIT OF MEAS	(5) QTY INC IN UNIT	(6) 30-DAY DS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(7) 30-DAY GS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(8) 1 YR ALW PER 100 EQUIP CNTGCY	(9) DEPOT MAINT ALW PER 100 EQUIP	(10) ILLUSTRATIONS (a) FIG NO.	(b) ITEM NO. OR REFERENCE DESIGNATION
P--H	3110-226-4277	.....BEARING: SMC549937-5 (70117)		EA	REF				REF	REF	REF	REF	REF	22	A3A1A7A1MP19
P--H	3110-226-4277	.....BEARING: SMC549937-5 (70117)		EA	REF				REF	REF	REF	REF	REF	22	A3A1A7A1MP20
P--H	3110-226-4277	.....BEARING: SMC549937-5 (70117)		EA	REF				REF	RLF	REF	REF	REF	22	A3A1A7A1MP21
P--H	3110-226-4277	.....BEARING: SMC549937-5 (70117)		EA	REF				REF	REF	REF	REF	REF	22	A3A1A7A1MP22
P--H	3110-226-4277	.....BEARING: SMC549937-5 (70117)		EA	REF				REF	REF	REF	REF	REF	22	A3A1A7A1MP23
P--H	3110-226-4277	.....BEARING: SMC549937-5 (70117)		EA	REF				REF	REF	REF	REF	RLF	22	A3A1A7A1MP24
P--H	3110-226-4277	.....BEARING: SMC549937-5 (70117)		EA	REF				REF	REF	REF	REF	REF	22	A3A1A7A1MP25
P--H	3110-226-4277	.....BEARING: SMC549937-5 (70117)		EA	REF				REF	REF	REF	REF	REF	22	A3A1A7A1MP26
P--H	3110-226-4277	.....BEARING: SMC549937-5 (70117)		EA	REF				REF	REF	REF	REF	REF	22	A3A1A7A1MP27
P--H	3110-226-4277	.....BEARING: SMC549937-5 (70117)		EA	REF				REF	REF	REF	REF	REF	22	A3A1A7A1MP28
P--H	3110-226-4277	.....BEARING: SMC549937-5 (70117)		EA	REF				REF	REF	REF	REF	REF	22	A3A1A7A1MP29
P--H	3110-226-4277	.....BEARING: SMC549937-5 (70117)		EA	REF				REF	REF	REF	REF	REF	22	A3A1A7A1MP30
P--H	3110-226-4277	.....BEARING: SMC549937-5 (70117)		EA	REF				REF	REF	REF	REF	REF	22	A3A1A7A1MP31
P--H	3110-226-4277	.....BEARING: SMC549937-5 (70117)		EA	REF				REF	REF	REF	REF	REF	22	A3A1A7A1MP32
P--H	3020-757-2821	.....GEAR, SPUR: SMD549715 (70117)		EA	3				*	2	2	19	10	22	A3A1A7A1MP33
P--H		.....SCREW, MACHINE: SMB550149 (70117)		EA	3				REF	REF	REF	REF	REF	22	A3A1A7A1MP33H3
P--H	3020-757-2821	.....GEAR, SPUR: SMD549715 (70117)		EA	REF				REF	REF	REF	REF	REF	22	A3A1A7A1MP34
P--H		.....SCREW, MACHINE: SMB550149 (70117)		EA	3				REF	REF	REF	REF	REF	22	A3A1A7A1MP34H3
P--H	3020-757-2821	.....GEAR, SPUR: SMD549715 (70117)		EA	REF				REF	REF	REF	REF	REF	22	A3A1A7A1MP35
P--H		.....SCREW, MACHINE: SMB550149 (70117)		EA	3				REF	REF	REF	REF	REF	22	A3A1A7A1MP35H3
P--H	3020-073-8335	.....GEAR SHAFT, SPUR: SMD549710 (70117)		EA	1				REF	REF	REF	REF	REF	22	A3A1A7A1MP36
P--H	3020-758-2737	.....GEAR SHAFT, SPUR: SMD549711-2 (70117)		EA	1				*	*	2	10	4	22	A3A1A7A1MP37
P--H	3020-758-2736	.....GEAR SHAFT, SPUR: SMD549711-2 (70117)		EA	1				*	*	2	10	4	22	A3A1A7A1MP38
P--H	3020-757-2819	.....GEAR SHAFT, SPUR: SMD549712 (70117)		EA	1				*	*	2	10	4	22	A3A1A7A1MP39
P--H	5821-757-2800	.....GEAR SHAFT, SPUR: SMD549713-1 (70117)		EA	2				*	*	2	16	8	22	A3A1A7A1MP40

(1) SMR CODE	(2) FEDERAL STOCK NUMBER	(3) DESCRIPTION REFERENCE NUMBER & MFR. CODE / USABLE ON CODE	(4) UNIT OF MEAS	(5) QTY INC IN UNIT	(6) 30-DAY DS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(7) 30-DAY GS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(8) 1 YR ALW PER 100 EQUIP CNTGCY	(9) DEPOT MAINT ALW PER 100 EQUIP	(10) ILLUSTRATIONS (a) FIG NO.	(b) ITEM NO. OR REFERENCE DESIGNATION
P--H	5821-757-2800	.....GEARSHAFT, SPUR: SMD549713-1 (70117)	EA	REF				REF	REF	REF	REF	REF		A3A1A7A1MP41
P--H	5821-758-0060	.....GEARSHAFT, SPUR: SMD549713-2 (70117)	EA	1				*	*	2	10	4		A3A1A7A1MP42
P--H	3020-757-2820	.....GEARSHAFT, SPUR: SMC549717 (70117)	EA	1				*	*	2	10	4	22	A3A1A7A1MP43
P--H	3020-763-1305	.....GEARSHAFT, SPUR: SMC549766 (70117)	EA	3				*	2	2	19	10	22	A3A1A7A1MP44
P--H	3020-763-1305	.....GEARSHAFT, SPUR: SMC549766 (70117)	EA	REF				REF	REF	REF	REF	REF	22	A3A1A7A1MP45
P--H	3020-763-1305	.....GEARSHAFT, SPUR: SMC549766 (70117)	EA	REF				REF	REF	REF	REF	REF	22	A3A1A7A1MP46
P--H	3020-763-1306	.....GEARSHAFT, SPUR: SMC549767 (70117)	EA	1				*	*	2	10	4	22	A3A1A7A1MP47
P--H	3020-757-2817	.....GEARSHAFT, SPUR: SMC549768 (70117)	EA	3				*	2	2	19	10	22	A3A1A7A1MP48
P--H	3020-757-2817	.....GEARSHAFT, SPUR: SMC549768 (70117)	EA	REF				REF	REF	REF	REF	REF	22	A3A1A7A1MP49
P--H	3020-757-2817	.....GEARSHAFT, SPUR: SMC549768 (70117)	EA	REF				REF	REF	REF	REF	REF	22	A3A1A7A1MP50
P--H	3020-757-2818	.....GEARSHAFT, SPUR: SMC549769 (70117)	EA	1				*	*	2	10	4	22	A3A1A7A1MP51
X1-H		.....HOUSING, GEAR: SMD550088 (70117)	EA	1										A3A1A7A1A1
X1-H		.....HOUSING, GEAR: SMD549923 (70117)	EA	1										A3A1A7A1A1MP1
P--H	5315-702-9651	.....PIN, STRAIGHT, HEADLESS: MS16555-618 (96906)	EA	2				*	*	2	16	8	22	A3A1A7A1A1H1
X1-H		.....PLATE, MOUNTING: SMD549868 (70117)	EA	1										A3A1A7A1A1MP2
	5305-763-7822	.....SCREW, MACHINE: SM51959-14 (96906)	EA	9				REF	REF	REF	REF	REF	22	A3A1A7A1A1MP2H9
P--H	3020-763-2352	.....IDLER, GEAR: SMB550074 (70117)	EA	1				*	*	2	10	4	22	A3A1A7A1MP52
P--H	3020-763-2353	.....IDLER, GEAR: SMC550075 (70117)	EA	1				*	*	2	10	4	22	A3A1A7A1MP53
P--H		....SCREW, MACHINE: SMB550158-2 (70117)	EA	5				2	2	2	59	40	21	A3A1A7H1
P--H	5961-853-1065	....SEMICONDUCTOR, DIODE: 1N3026B (81349)	EA	1				*	2	2	18	9	21	A3A1A7CR901
P--H	5821-833-5846	....SPACER, SLEEVE: SMB549935-1 (70117)	EA	2				*	2	2	13	6	21	A3A1A7MP3
P--H	5940-836-3536	....TERMINAL, LUG: 4040-2HOTTINNED (77147)	EA	2				REF	REF	REF	REF	REF	21	A3A1A7E2
MD-H		....TERMINAL, STUD: 4873-1-0516 (71279)	EA	7									21	A3A1A7E3
PH-F-S	5821-757-2799	..FIXED IF AMPLIFIER: SMD549677 (70117)	EA	1				*	*	*	5	2	3	A3A2
P--D		...CABLE ASSEMBLY, RF: SMB549985-5 (70117)	EA	1								*	23	A3A2W1

(1) SMR CODE	(2) FEDERAL STOCK NUMBER	(3) DESCRIPTION REFERENCE NUMBER & MFR. CODE / USABLE ON CODE	(4) UNIT OF MEAS	(5) QTY INC IN UNIT	(6) 30-DAY DS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(7) 30-DAY GS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(8) 1 YR ALW PER 100 EQUIP CNTGCY	(9) DEPOT MAINT ALW PER 100 EQUIP	(10) ILLUSTRATIONS (a) FIG NO.	(b) ITEM NO. OR REFERENCE DESIGNATION
X1-D		....CONNECTOR, PLUG: P1031 (94375)	EA	1									23	A3A2W1P1203
P--H	5995-985-8110	...CABLE ASSEMBLY, RF: SMB549985-8 (70117)	EA	1									23	A3A2W2
X1-H		....CONNECTOR, PLUG: P1031 (94375)	EA	1									23	A3A2W2P1202
X1-H		...CHASSIS: SMD549932 (70117)	EA	1										A3A2A1
X1-H		....CHASSIS: SMD549932-1 (70117)	EA	1										A3A2A1MP1
P--H	5935-615-8555	....JACK TIP: SKT5BCWHITE (98291)	EA	3				2	2	2	53	35	24	A3A2A1J1201
P--H	5935-615-8555	....JACK TIP: SKT5BCWHITE (98291)	EA	REF				REF	REF	REF	REF	REF	24	A3A2A1J1202
P--H	5935-615-8555	....JACK TIP: SKT5BCWHITE (98291)	EA	REF				REF	REF	REF	REF	REF	24	A3A2A1J1203
P--H	5935-702-3446	...CONNECTOR, RECEPTACLE: DE9PC7 (91146)	EA	1				*	2	2	19	10	23	A3A2P1205
	5310-285-7085	...NUT, PLAIN, HEXAGON: MS20365-440A (96906)	EA	2				*	*	*	*	*	23	A3A2P1205H2
	5305-059-7189	...SCREW, MACHINE: MS35200-14 (96906)	EA	2				*	*	*	*	*	24	A3A2P1205H2
P--H	5935-963-1432	...CONNECTOR, RECEPTACLE: 3242 (98278)	EA	1				2	2	2	33	20	24	A3A2P1204
P--H	5935-881-9480	...CONNECTOR, RECEPTACLE: 51-258 (98278)	EA	1				2	2	2	33	20	24	A3A2P1201
P--D	5821-728-3172	...PC BOARD ASSEMBLY, FIXED IF: SMD549693 (70117)	EA	1								2	23	A3A2A2
P--H		...SCREW, MACHINE: SMB550157-2 (70117)	EA	4				2	5	11	514	450	23	A3A2A2H4
X1-H		....BOARD, PC: SMD550292 (70117)	EA	1										A3A2A2E1
P--H	5910-889-4905	....CAPACITOR, FIXED, CERAMIC: CK13AX472M (81349)	EA	3				2	2	2	40	25	23	A3A2A2C1205
P--H	5910-889-4905	....CAPACITOR, FIXED, CERAMIC: CK13AX472M (81349)	EA	REF				REF	REF	REF	REF	REF	23	A3A2A2C1209
P--H	5910-889-4905	....CAPACITOR, FIXED, CERAMIC: CK13AX472M (81349)	EA	REF				REF	REF	REF	REF	REF	23	A3A2A2C1212
P--H	5910-939-7510	....CAPACITOR, FIXED, CERAMIC: CK15AX223M (81349)	EA	8				2	2	3	118	90	23	A3A2A2C1201
P--H	5910-939-7510	....CAPACITOR, FIXED, CERAMIC: CK15AX223M (81349)	EA	REF				REF	REF	REF	REF	REF	23	A3A2A2C1203
P--H	5910-939-7510	....CAPACITOR, FIXED, CERAMIC: CK15AX223M (81349)	EA	REF				REF	REF	REF	REF	REF	23	A3A2A2C1204
P--H	5910-939-7510	....CAPACITOR, FIXED, CERAMIC: CK15AX223M (81349)	EA	REF				REF	REF	REF	REF	REF	23	A3A2A2C1206
P--H	5910-939-7510	....CAPACITOR, FIXED, CERAMIC: CK15AX223M (81349)	EA	REF				REF	REF	REF	REF	REF	23	A3A2A2C1208
P--H	5910-939-7510	....CAPACITOR, FIXED, CERAMIC: CK15AX223M (81349)	EA	REF				REF	REF	REF	REF	REF	23	A3A2A2C1211

(1) SMR CODE	(2) FEDERAL STOCK NUMBER	(3) DESCRIPTION REFERENCE NUMBER & MFR. CODE / USABLE ON CODE	(4) UNIT OF MEAS	(5) QTY INC IN UNIT	(6) 30-DAY DS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(7) 30-DAY GS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(8) 1 YR ALW PER 100 EQUIP CNTGCY	(9) DEPOT MAINT ALW PER 100 EQUIP	(10) ILLUSTRATIONS (a) FIG NO.	(b) ITEM NO. OR REFERENCE DESIGNATION
P--H	5910-939-7510	....CAPACITOR, FIXED, CERAMIC: CK15AX223M (81349)	EA	REF				REF	REF	REF	REF	REF	23	A3A2A2C1214
P--H	5910-939-7510	....CAPACITOR, FIXED, CERAMIC: CK15AX223M (81349)	EA	REF				REF	REF	REF	REF	REF	23	A3A2A2C1215
P--H	5910-045-5315	....CAPACITOR, FIXED, CERAMIC: CK16AX473M (81349)	EA	3				*	2	2	27	15	23	A3A2A2C1202
P--H	5910-045-5315	....CAPACITOR, FIXED, CERAMIC: CK16AX473M (81349)	EA	REF				REF	REF	REF	REF	REF	23	A3A2A2C1207
P--H	5910-045-5315	....CAPACITOR, FIXED, CERAMIC: CK16AX473M (81349)	EA	REF				REF	REF	REF	REF	REF	23	A3A2A2C1210
P--H	5910-823-1347	....CAPACITOR, FIXED, ELECTROLYTIC: CS13AF010M (81349)	EA	1				2	2	4	187	150	23	A3A2A2C1213
P--H	5950-842-2247	....COIL, RF: 2500-14 (99800)	EA	2				REF	REF	REF	REF	REF	23	A3A2A2L1203
P--H	5950-842-2247	....COIL, RF: 2500-14 (99800)	EA	REF				REF	REF	REF	REF	REF	23	A3A2A2L1204
P--H	5950-878-2442	....COIL, RF: 2500-62 (99800)	EA	2				2	2	2	46	30	23	A3A2A2L1201
P--H	5950-878-2442	....COIL, RF: 2500-62 (99800)	EA	REF				REF	REF	REF	REF	REF	23	A3A2A2L1202
P--H	5915-728-5958	....FILTER, BANDPASS: TL42E60C1 (06743)	EA	1				*	*	*	5	2	23	A3A2A2FL1201
MD-H		....INSULATOR DISK: SMB550063 (70117)	EA	4									24	A3A2A2E1202
P--H	5905-752-3338	....RESISTOR, FIXED, COMPOSITION: RC07GF102K (81349)	EA	2				REF	REF	REF	REF	REF	24	A3A2A2R1202
P--H	5905-752-3338	....RESISTOR, FIXED, COMPOSITION: RC07GF102K (81349)	EA	REF				REF	REF	REF	REF	REF	24	A3A2A2R1207
P--H	5905-726-5343	....RESISTOR, FIXED, COMPOSITION: RC07GF152K (81349)	EA	5				2	2	2	65	45	24	A3A2A2R1201
P--H	5905-726-5343	....RESISTOR, FIXED, COMPOSITION: RC07GF152K (81349)	EA	REF				REF	REF	REF	REF	REF	24	A3A2A2R1206
P--H	5905-726-5343	....RESISTOR, FIXED, COMPOSITION: RC07GF152K (81349)	EA	REF				REF	REF	REF	REF	REF	24	A3A2A2R1210
P--H	5905-726-5343	....RESISTOR, FIXED, COMPOSITION: RC07GF152K (81349)	EA	REF				REF	REF	REF	REF	REF	24	A3A2A2R1211
P--H	5905-726-5343	....RESISTOR, FIXED, COMPOSITION: RC07GF152K (81349)	EA	REF				REF	REF	REF	REF	REF	24	A3A2A2R1215
P--H	5905-726-5344	....RESISTOR, FIXED, COMPOSITION: RC07GF153K (81349)	EA	1				*	2	2	27	15	24	A3A2A2R1213
P--H	5905-726-5346	....RESISTOR, FIXED, COMPOSITION: RC07GF182K (81349)	EA	1				*	2	2	19	10	24	A3A2A2R1212
P--H	5905-726-6433	....RESISTOR, FIXED, COMPOSITION: RC07GF222K (81349)	EA	1				REF	REF	REF	REF	REF	24	A3A2A2R1214
P--H	5905-726-6435	....RESISTOR, FIXED, COMPOSITION: RC07GF331K (81349)	EA	2				REF	REF	REF	REF	REF	24	A3A2A2R1204
P--H	5905-726-6435	....RESISTOR, FIXED, COMPOSITION: RC07GF331K (81349)	EA	REF				REF	REF	REF	REF	REF	24	A3A2A2R1216
P--H	5905-686-4528	....RESISTOR, FIXED, COMPOSITION: RC07GF332K (81349)	EA	2				REF	REF	REF	REF	REF	24	A3A2A2R1205

(1) SMR CODE	(2) FEDERAL STOCK NUMBER	(3) DESCRIPTION REFERENCE NUMBER & MFR. CODE / USABLE ON CODE	(4) UNIT OF MEAS	(5) QTY INC IN UNIT	(6) 30-DAY DS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(7) 30-DAY GS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(8) 1 YR ALW PER 100 EQUIP CNTGCY	(9) DEPOT MAINT ALW PER 100 EQUIP	(10) ILLUSTRATIONS (a) FIG NO.	(b) ITEM NO. OR REFERENCE DESIGNATION
P--H	5905-686-4528	....RESISTOR, FIXED, COMPOSITION: RC07GF332K (81349)	EA	REF				REF	REF	REF	REF	REF	24	A3A2A2R1209
P--H	5905-726-6436	....RESISTOR, FIXED, COMPOSITION: RC07GF333K (81349)	EA	1				2	2	2	65	45	24	A3A2A2R1244
P--H	5905-682-4098	....RESISTOR, FIXED, COMPOSITION: RC07GF392K (81349)	EA	2				2	2	2	40	25	24	A3A2A2R1203
P--H	5905-682-4098	....RESISTOR, FIXED, COMPOSITION: RC07GF392K (81349)	EA	REF				REF	REF	REF	REF	REF	24	A3A2A2R1208
P--H	5905-726-6441	....RESISTOR, FIXED, COMPOSITION: RC07GF561K (81349)	EA	1				REF	REF	REF	REF	REF	24	A3A2A2R1217
P--H	5961-686-8578	....TRANSISTOR: 2N338 (81349)	EA	4				REF	REF	REF	REF	REF	24	A3A2A2Q1201
P--H	5961-686-8578	....TRANSISTOR: 2N338 (81349)	EA	REF				REF	REF	REF	REF	REF	24	A3A2A2Q1202
P--H	5961-686-8578	....TRANSISTOR: 2N338 (81349)	EA	REF				REF	REF	REF	REF	REF	24	A3A2A2Q1203
P--H	5961-686-8578	....TRANSISTOR: 2N338 (81349)	EA	REF				REF	REF	REF	REF	REF	24	A3A2A2Q1204
P--D	5821-728-3654	...PC BOARD ASSEMBLY, FIXED IF: SMD549695 (70117)	EA	1								2	23	A3A2A3
P--H		...SCREW, MACHINE: SMB550157-2 (70117)	EA	4				REF	REF	REF	REF	REF	23	A3A2A3H4
X1-H		....BOARD, PC: SMD550293 (70117)	EA	1									23	A3A2A3E1
P--H	5910-889-4905	....CAPACITOR, FIXED, CERAMIC: CK13AX472M (81349)	EA	2				REF	REF	REF	REF	REF	23	A3A2A3C1217
P--H	5910-889-4905	....CAPACITOR, FIXED, CERAMIC: CK13AX472M (81349)	EA	REF				REF	REF	REF	REF	REF	23	A3A2A3C1220
P--H	5910-939-7510	....CAPACITOR, FIXED, CERAMIC: CK15AX223M (81349)	EA	5				REF	REF	REF	REF	REF	23	A3A2A3C1218
P--H	5910-939-7510	....CAPACITOR, FIXED, CERAMIC: CK15AX223M (81349)	EA	REF				REF	REF	REF	REF	REF	23	A3A2A3C1219
P--H	5910-939-7510	....CAPACITOR, FIXED, CERAMIC: CK15AX223M (81349)	EA	REF				REF	REF	REF	REF	REF	23	A3A2A3C1225
P--H	5910-939-7510	....CAPACITOR, FIXED, CERAMIC: CK15AX223M (81349)	EA	REF				REF	REF	REF	REF	REF	23	A3A2A3C1226
P--H	5910-939-7510	....CAPACITOR, FIXED, CERAMIC: CK15AX223M (81349)	EA	REF				REF	REF	REF	REF	REF	23	A3A2A3C1233
P--H	5910-883-8116	....CAPACITOR, FIXED, ELECTROLYTIC: CS13AC390K (81349)	EA	2				2	2	2	71	50	23	A3A2A3C1230
P--H	5910-883-8116	....CAPACITOR, FIXED, ELECTROLYTIC: CS13AC390K (81349)	EA	REF				REF	REF	REF	REF	REF	23	A3A2A3C1232
P--H	5910-889-4503	....CAPACITOR, FIXED, ELECTROLYTIC: CS13AE100M (81349)	EA	1				2	2	2	95	70	23	A3A2A3C1227
P--H	5910-989-9695	....CAPACITOR, FIXED, ELECTROLYTIC: CS13AE2R2M (81349)	EA	2				2	2	2	107	80	23	A3A2A3C1228
P--H	5910-989-9695	....CAPACITOR, FIXED, ELECTROLYTIC: CS13AE2R2M (81349)	EA	REF				REF	REF	REF	REF	REF	23	A3A2A3C1231
P--H	5910-071-1642	....CAPACITOR, FIXED, MICA: CM05ED820G03 (81349)	EA	1				*	2	2	12	5	23	A3A2A3C1222

(1) SMR CODE	(2) FEDERAL STOCK NUMBER	(3) DESCRIPTION REFERENCE NUMBER & MFR. CODE / USABLE ON CODE	(4) UNIT OF MEAS	(5) QTY INC IN UNIT	(6) 30-DAY DS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(7) 30-DAY GS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(8) 1 YR ALW PER 100 EQUIP CNTGCY	(9) DEPOT MAINT ALW PER 100 EQUIP	(10) ILLUSTRATIONS (a) FIG NO.	(b) ITEM NO. OR REFERENCE DESIGNATION
P--H	5910-984-7588	....CAPACITOR, FIXED, MICA: CM05FD101G03 (81349)	EA	2				*	2	2	19	10	23	A3A2A3C1223
P--H	5910-984-7588	....CAPACITOR, FIXED, MICA: CM05FD101G03 (81349)	EA	REF				REF	REF	REF	REF	REF	23	A3A2A3C1224
P--H	5910-957-9909	....CAPACITOR, FIXED, MICA: CM05FD391G03 (81349)	EA	1				*	2	2	12	5	23	A3A2A3C1221
P--H	5910-717-5853	....CAPACITOR, FIXED, MICA: CM06F182J03 (81349)	EA	2				REF	REF	REF	REF	REF	23	A3A2A3C1216
P--H	5910-717-5853	....CAPACITOR, FIXED, MICA: CM06F182J03 (81349)	EA	REF				REF	REF	REF	REF	REF	23	A3A2A3C1229
P--H	5950-763-2248	....COIL, RF: CDD1765 (71279)	EA	1				*	2	2	16	8	23	A3A2A3L1205
P--H	5950-878-2442	....COIL, RF: 2500-62 (99800)	EA	1				REF	REF	REF	REF	REF	23	A3A2A3L1206
MD-H		....INSULATOR DISK: SMB550063 (70117)	EA	6									24	A3A2A3E2
P--H	5905-752-3338	....RESISTOR, FIXED, COMPOSITION: RC07GF102K (81349)	EA	2				REF	REF	REF	REF	REF	24	A3A2A3R1237
P--H	5905-752-3338	....RESISTOR, FIXED, COMPOSITION: RC07GF102K (81349)	EA	REF				REF	REF	REF	REF	REF	24	A3A2A3R1239
P--H	5905-816-8554	....RESISTOR, FIXED, COMPOSITION: RC07GF103K (81349)	EA	1				REF	REF	REF	REF	REF	24	A3A2A3R1224
P--H	5905-752-3335	....RESISTOR, FIXED, COMPOSITION: RC07GF122K (81349)	EA	1				*	2	2	12	5	24	A3A2A3R1228
P--H	5905-686-4529	....RESISTOR, FIXED, COMPOSITION: RC07GF123K (81349)	EA	3				REF	REF	REF	REF	REF	24	A3A2A3R1225
P--H	5905-686-4529	....RESISTOR, FIXED, COMPOSITION: RC07GF123K (81349)	EA	REF				REF	REF	REF	REF	REF	24	A3A2A3R1226
P--H	5905-686-4529	....RESISTOR, FIXED, COMPOSITION: RC07GF123K (81349)	EA	REF				REF	REF	REF	REF	REF	24	A3A2A3R1227
P--H	5905-726-5343	....RESISTOR, FIXED, COMPOSITION: RC07GF152K (81349)	EA	1				REF	REF	REF	REF	REF	23	A3A2A3R1221
P--H	5905-825-2360	....RESISTOR, FIXED, COMPOSITION: RC07GF221K (81349)	EA	1				*	2	2	12	5	24	A3A2A3R1229
P--H	5905-726-6433	....RESISTOR, FIXED, COMPOSITION: RC07GF222K (81349)	EA	1				REF	REF	REF	REF	REF	24	A3A2A3R1234
P--H	5905-682-1101	....RESISTOR, FIXED, COMPOSITION: RC07GF224K (81349)	EA	1				*	2	2	12	5	24	A3A2A3R1235
P--H	5905-752-3156	....RESISTOR, FIXED, COMPOSITION: RC07GF223K (81349)	EA	2				REF	REF	REF	REF	REF	24	A3A2A3R1219
P--H	5905-752-3156	....RESISTOR, FIXED, COMPOSITION: RC07GF223K (81349)	EA	REF				REF	REF	REF	REF	REF	24	A3A2A3R1232
P--H	5905-686-4528	....RESISTOR, FIXED, COMPOSITION: RC07GF332K (81349)	EA	2				REF	REF	REF	REF	REF	24	A3A2A3R1223
P--H	5905-686-4528	....RESISTOR, FIXED, COMPOSITION: RC07GF332K (81349)	EA	REF				REF	REF	REF	REF	REF	24	A3A2A3R1236
P--H	5905-726-6436	....RESISTOR, FIXED, COMPOSITION: RC07GF333K (81349)	EA	2				REF	REF	REF	REF	REF	24	A3A2A3R1233
P--H	5905-726-6436	....RESISTOR, FIXED, COMPOSITION: RC07GF333K (81349)	EA	REF				REF	REF	REF	REF	REF	24	A3A2A3R1242

(1) SMR CODE	(2) FEDERAL STOCK NUMBER	(3) DESCRIPTION REFERENCE NUMBER & MFR. CODE / USABLE ON CODE	(4) UNIT OF MEAS	(5) QTY INC IN UNIT	(6) 30-DAY DS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(7) 30-DAY GS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(8) 1 YR ALW PER 100 EQUIP CNTGCY	(9) DEPOT MAINT ALW PER 100 EQUIP	(10) ILLUSTRATIONS (a) FIG NO.	(b) ITEM NO. OR REFERENCE DESIGNATION
P--H	5905-682-4098	....RESISTOR, FIXED, COMPOSITION: RC07GF392K (81349)	EA	1				REF	REF	REF	REF	REF	24	A3A2A3R1241
P--H	5905-688-4447	....RESISTOR, FIXED, COMPOSITION: RC07GF473K (81349)	EA	1				REF	REF	REF	REF	REF	24	A3A2A3R1238
P--H	5905-726-6441	....RESISTOR, FIXED, COMPOSITION: RC07GF561K (81349)	EA	1				REF	REF	REF	REF	REF	24	A3A2A3R1230
P--H	5905-686-9997	....RESISTOR, FIXED, COMPOSITION: RC07GF682J (81349)	EA	4				REF	REF	REF	REF	REF	24	A3A2A3R1218
P--H	5905-686-9997	....RESISTOR, FIXED, COMPOSITION: RC07GF682J (81349)	EA	REF				REF	REF	REF	REF	REF	24	A3A2A3R1220
P--H	5905-686-9997	....RESISTOR, FIXED, COMPOSITION: RC07GF682J (81349)	EA	REF				REF	REF	REF	REF	REF	24	A3A2A3R1222
P--H	5905-686-9997	....RESISTOR, FIXED, COMPOSITION: RC07GF682J (81349)	EA	REF				REF	REF	REF	REF	REF	24	A3A2A3R1240
P--H	5905-171-2005	....RESISTOR, FIXED, COMPOSITION: RC20GF471K (81349)	EA	2				*	2	2	19	10	24	A3A2A3R1231
P--H	5905-171-2005	....RESISTOR, FIXED, COMPOSITION: RC20GF471K (81349)	EA	REF				REF	REF	REF	REF	REF	24	A3A2A3R1243
P--H	5961-615-0095	....SEMICONDUCTOR, DIODE: 1N276 (81349)	EA	1				REF	REF	REF	REF	REF	23	A3A2A3CR1201
P--H	5961-853-1065	....SEMICONDUCTOR, DIODE: 1N3026B (81349)	EA	1				REF	REF	REF	REF	REF	23	A3A2A3CR1206
P--H	5961-752-6121	....SEMICONDUCTOR, DIODE: 1N753A (81349)	EA	1				*	2	2	13	6	23	A3A2A3CR1207
P--H	5961-836-6667	....SEMICONDUCTOR, DIODE: 1N816 (81349)	EA	2				*	2	2	18	9	24	A3A2A3CR1202
P--H	5961-836-6667	....SEMICONDUCTOR, DIODE: 1N816 (81349)	EA	REF				REF	REF	REF	REF	REF	23	A3A2A3CR1203
P--H	5961-995-2986	....SEMICONDUCTOR, DIODE: 1N995M (81349)	EA	2				*	2	2	13	6	23	A3A2A3CR1204
P--H	5961-995-2986	....SEMICONDUCTOR, DIODE: 1N995M (81349)	EA	REF				REF	REF	REF	REF	REF	23	A3A2A3CR1205
P--H	5961-686-8578	....TRANSISTOR: 2N338 (81349)	EA	6				REF	REF	REF	REF	REF	24	A3A2A3Q1205
P--H	5961-686-8578	....TRANSISTOR: 2N338 (81349)	EA	REF				REF	REF	REF	REF	REF	24	A3A2A3Q1206
P--H	5961-686-8578	....TRANSISTOR: 2N338 (81349)	EA	REF				REF	REF	REF	REF	REF	24	A3A2A3Q1207
P--H	5961-686-8578	....TRANSISTOR: 2N338 (81349)	EA	REF				REF	REF	REF	REF	REF	24	A3A2A3Q1208
P--H	5961-686-8578	....TRANSISTOR: 2N338 (81349)	EA	REF				REF	REF	REF	REF	REF	24	A3A2A3Q1209
P--H	5961-686-8578	....TRANSISTOR: 2N338 (81349)	EA	REF				REF	REF	REF	REF	REF	24	A3A2A3Q1210
P--H	5305-676-8146	...SCREW, SHOULDER: SMC549792-2 (70117)	EA	2				2	2	2	107	80	23	A3A2H1
P--H	5940-644-8722	...TERMINAL, LUG: 4007-4 (77147)	EA	1				REF	REF	REF	REF	REF	23	A3A2E1
PH-F-S	5821-733-5690	..RECEIVER ASSEMBLY, AUDIO: SMD549678 (70117)	EA	1				*	*	*	5	2	3	A3A3

(1) SMR CODE	(2) FEDERAL STOCK NUMBER	(3) DESCRIPTION REFERENCE NUMBER & MFR. CODE / USABLE ON CODE	(4) UNIT OF MEAS	(5) QTY INC IN UNIT	(6) 30-DAY DS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(7) 30-DAY GS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(8) 1 YR ALW PER 100 EQUIP CNTGCY	(9) DEPOT MAINT ALW PER 100 EQUIP	(10) ILLUSTRATIONS (a) FIG NO.	(b) ITEM NO. OR REFERENCE DESIGNATION
X1-H		...CHASSIS: SMD550076 (70117)	EA	1										A3A3MP1
X1-H		...CONNECTOR, RECEPTACLE: DE15PC7 (91146)	EA	1									25	A3A3P1301
	5310-285-7085	...NUT, PLAIN, HEXAGON: MS20365-440A (96906)	EA	2				REF	REF	REF	REF	REF	26	A3A3P1301H2
	5305-770-2579	...SCREW, MACHINE: MS51959-15 (96906)	EA	2				REF	REF	REF	REF	REF	26	A3A3P1301H2
P--D	5821-728-3653	...PC BOARD ASSEMBLY, AUDIO RECEIVER: SMD549690 (70117)	EA	1								2	26	A3A3A1
P--H		...SCREW, MACHINE: SMB550157-2 (70117)	EA	4				REF	REF	REF	REF	REF	26	A3A3A1H4
X1-H		....BOARD, PC: SMD550288 (70117)	EA	1										A3A3A1E1
P--H	5910-939-7510	....CAPACITOR, FIXED, CERAMIC: CK15AX223M (81349)	EA	1				REF	REF	REF	REF	REF	25	A3A3A1C1321
P--H	5910-883-8116	....CAPACITOR, FIXED, ELECTROLYTIC: CS13AC390K (81349)	EA	1				REF	REF	REF	REF	REF	26	A3A3A1C1302
P--H	5910-057-4306	....CAPACITOR, FIXED, ELECTROLYTIC: CS13AC4R7M (81349)	EA	1				2	2	2	33	20	25	A3A3A1C1316
P--H	5910-823-1347	....CAPACITOR, FIXED, ELECTROLYTIC: CS13AF010M (81349)	EA	5				REF	REF	REF	REF	REF	25	A3A3A1C1301
P--H	5910-823-1347	....CAPACITOR, FIXED, ELECTROLYTIC: CS13AF010M (81349)	EA	REF				REF	REF	REF	REF	REF	25	A3A3A1C1303
P--H	5910-823-1347	....CAPACITOR, FIXED, ELECTROLYTIC: CS13AF010M (81349)	EA	REF				REF	REF	REF	REF	REF	25	A3A3A1C1317
P--H	5910-823-1347	....CAPACITOR, FIXED, ELECTROLYTIC: CS13AF010M (81349)	EA	REF				REF	REF	REF	REF	REF	26	A3A3A1C1318
P--H	5910-823-1347	....CAPACITOR, FIXED, ELECTROLYTIC: CS13AF010M (81349)	EA	REF				REF	REF	REF	REF	REF	26	A3A3A1C1319
X1-H		....CAPACITOR, FIXED, PLASTIC: 315L4AA32B299A (09134)	EA	2									25	A3A3A1C1304
X1-H		....CAPACITOR, FIXED, PLASTIC: 315L4AA32B299A (09134)	EA	REF									26	A3A3A1C1305
MD-H		....INSULATOR, DISK: SMB550063 (70117)	EA	4									26	A3A3A1E2
P--H	5945-728-5973	....RELAY, ARMATURE: SMD504616 (70117)	EA	1				*	2	2	27	15	26	A3A3A1K1301
	5310-275-0889	....NUT, PLAIN, HEXAGON: 313-0132-00 (13499)	EA	2				REF	REF	REF	REF	REF	26	A3A3A1K1301H2
P--H		....SCREW, MACHINE: SMB550157-2 (70117)	EA	2				REF	REF	REF	REF	REF	25	A3A3A1K1301H2
P--H	5905-726-5340	....RESISTOR, FIXED, COMPOSITION: RC07GF101K (81349)	EA	1				*	2	2	19	10	25	A3A3A1R1304
P--H	5905-686-4530	....RESISTOR, FIXED, COMPOSITION: RC07GF104K (81349)	EA	5				2	2	2	40	25	25	A3A3A1R1307
P--H	5905-686-4530	....RESISTOR, FIXED, COMPOSITION: RC07GF104K (81349)	EA	REF				REF	REF	REF	REF	REF	26	A3A3A1R1329
P--H	5905-686-4530	....RESISTOR, FIXED, COMPOSITION: RC07GF104K (81349)	EA	REF				REF	REF	REF	REF	REF	25	A3A3A1R1336

(1) SMR CODE	(2) FEDERAL STOCK NUMBER	(3) DESCRIPTION REFERENCE NUMBER & MFR. CODE / USABLE ON CODE	(4) UNIT OF MEAS	(5) QTY INC IN UNIT	(6) 30-DAY DS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(7) 30-DAY GS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(8) 1 YR ALW PER 100 EQUIP CNTGCY	(9) DEPOT MAINT ALW PER 100 EQUIP	(10) ILLUSTRATIONS (a) FIG NO.	(b) ITEM NO. OR REFERENCE DESIGNATION
P--H	5905-686-4530	....RESISTOR, FIXED, COMPOSITION: RC07GF104K (81349)	EA	REF				REF	REF	REF	REF	REF	25	A3A3A1R1337
P--H	5905-686-4530	....RESISTOR, FIXED, COMPOSITION: RC07GF104K (81349)	EA	REF				REF	REF	REF	REF	REF	25	A3A3A1R1338
P--H	5905-726-4413	....RESISTOR, FIXED, COMPOSITION: RC07GF123J (81349)	EA	1				REF	REF	REF	REF	REF	25	A3A3A1R1310
P--H	5905-686-4531	....RESISTOR, FIXED, COMPOSITION: RC07GF124K (81349)	EA	1				*	2	2	12	5	25	A3A3A1R1328
P--H	5905-726-5344	....RESISTOR, FIXED, COMPOSITION: RC07GF153K (81349)	EA	1				REF	REF	REF	REF	REF	26	A3A3A1R1330
P--H	5905-687-0000	....RESISTOR, FIXED, COMPOSITION: RC07GF183J (81349)	EA	2				2	2	2	40	25	26	A3A3A1R1313
P--H	5905-687-0000	....RESISTOR, FIXED, COMPOSITION: RC07GF183J (81349)	EA	REF				REF	REF	REF	REF	REF	26	A3A3A1R1314
P--H	5905-686-4527	....RESISTOR, FIXED, COMPOSITION: RC07GF272K (81349)	EA	1				*	2	2	27	15	26	A3A3A1R1305
P--H	5905-726-6435	....RESISTOR, FIXED, COMPOSITION: RC07GF331K (81349)	EA	1				REF	REF	REF	REF	REF	25	A3A3A1R1331
P--H	5905-686-4528	....RESISTOR, FIXED, COMPOSITION: RC07GF332K (81349)	EA	1				REF	REF	REF	REF	REF	25	A3A3A1R1333
P--H	5905-726-6436	....RESISTOR, FIXED, COMPOSITION: RC07GF333K (81349)	EA	4				REF	REF	REF	REF	REF	25	A3A3A1R1301
P--H	5905-726-6436	....RESISTOR, FIXED, COMPOSITION: RC07GF333K (81349)	EA	REF				REF	REF	REF	REF	REF	26	A3A3A1R1334
P--H	5905-726-6436	....RESISTOR, FIXED, COMPOSITION: RC07GF333K (81349)	EA	REF				REF	REF	REF	REF	REF	26	A3A3A1R1335
P--H	5905-726-6436	....RESISTOR, FIXED, COMPOSITION: RC07GF333K (81349)	EA	REF				REF	REF	REF	REF	REF	26	A3A3A1R1341
P--H	5905-688-4447	....RESISTOR, FIXED, COMPOSITION: RC07GF473K (81349)	EA	1				REF	REF	REF	REF	REF	26	A3A3A1R1302
P--H	5905-800-0179	....RESISTOR, FIXED, COMPOSITION: RC07GF563J (81349)	EA	1				*	2	2	12	5	25	A3A3A1R1309
P--H	5905-686-9997	....RESISTOR, FIXED, COMPOSITION: RC07GF682J (81349)	EA	4				REF	REF	REF	REF	REF	25	A3A3A1R1303
P--H	5905-686-9997	....RESISTOR, FIXED, COMPOSITION: RC07GF682J (81349)	EA	REF				REF	REF	REF	REF	REF	26	A3A3A1R1306
P--H	5905-686-9997	....RESISTOR, FIXED, COMPOSITION: RC07GF682J (81349)	EA	REF				REF	REF	REF	REF	REF	25	A3A3A1R1311
P--H	5905-686-9997	....RESISTOR, FIXED, COMPOSITION: RC07GF682J (81349)	EA	REF				REF	REF	REF	REF	REF	25	A3A3A1R1312
P--H	5905-681-9970	....RESISTOR, FIXED, COMPOSITION: RC07GF822J (81349)	EA	2				REF	REF	REF	REF	REF	26	A3A3A1R1308
P--H	5905-681-9970	....RESISTOR, FIXED, COMPOSITION: RC07GF822J (81349)	EA	REF				REF	REF	REF	REF	REF	26	A3A3A1R1339
P--H	5905-195-6800	....RESISTOR, FIXED, COMPOSITION: RC20GF561J (81349)	EA	1				*	2	2	19	10	25	A3A3A1R1326
P--H	5905-543-0407	....RESISTOR, THERMAL: 22TD2 (05010)	EA	1				*	2	2	13	6	25	A3A3A1RT1301
P--H	5905-993-5147	....RESISTOR, VARIABLE: 381-0362-00 (13499)	EA	1				*	2	2	16	8	26	A3A3A1R1315

(1) SMR CODE	(2) FEDERAL STOCK NUMBER	(3) DESCRIPTION REFERENCE NUMBER & MFR. CODE / USABLE ON CODE	(4) UNIT OF MEAS	(5) QTY INC IN UNIT	(6) 30-DAY DS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(7) 30-DAY GS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(8) 1 YR ALW PER 100 EQUIP CNTGCY	(9) DEPOT MAINT ALWPER 100 EQUIP	(10) ILLUSTRATIONS (a) FIG NO.	(b) ITEM NO. OR REFERENCE DESIGNATION
P--H	5905-884-1610	....RESISTOR, VARIABLE: CT200-00-5K (75042)	EA	1				*	2	2	16	8	26	A3A3A1R1332
	5310-271-4640	....NUT, PLAIN, HEXAGON: MS35649-24 (96906)	EA	2				REF	REF	REF	REF	REF	26	A3A3A1R1332H2
	5305-054-5642	....SCREW, MACHINE: MS51957-8 (96906)	EA	2				*	*	*	*	*	25	A3A3A1R1332H2
P--H	5960-615-0095	....SEMICONDUCTOR, DIODE: 1N276 (81349)	EA	11				REF	REF	REF	REF	REF	26	A3A3A1CR1301
P--H	5960-615-0095	....SEMICONDUCTOR, DIODE: 1N276 (81349)	EA	REF				REF	REF	REF	REF	REF	26	A3A3A1CR1302
P--H	5960-615-0095	....SEMICONDUCTOR, DIODE: 1N276 (81349)	EA	REF				REF	REF	REF	REF	REF	25	A3A3A1CR1303
P--H	5960-615-0095	....SEMICONDUCTOR, DIODE: 1N276 (81349)	EA	REF				REF	REF	REF	REF	REF	26	A3A3A1CR1304
P--H	5960-615-0095	....SEMICONDUCTOR, DIODE: 1N276 (81349)	EA	REF				REF	REF	REF	REF	REF	26	A3A3A1CR1310
P--H	5960-615-0095	....SEMICONDUCTOR, DIODE: 1N276 (81349)	EA	REF				REF	REF	REF	REF	REF	26	A3A3A1CR1311
P--H	5960-615-0095	....SEMICONDUCTOR, DIODE: 1N276 (81349)	EA	REF				REF	REF	REF	REF	REF	26	A3A3A1CR1312
P--H	5960-615-0095	....SEMICONDUCTOR, DIODE: 1N276 (81349)	EA	REF				REF	REF	REF	REF	REF	25	A3A3A1CR1313
P--H	5960-615-0095	....SEMICONDUCTOR, DIODE: 1N276 (81349)	EA	REF				REF	REF	REF	REF	REF	25	A3A3A1CR1314
P--H	5960-615-0095	....SEMICONDUCTOR, DIODE: 1N276 (81349)	EA	REF				REF	REF	REF	REF	REF	25	A3A3A1CR1317
P--H	5960-615-0095	....SEMICONDUCTOR, DIODE: 1N276 (81349)	EA	REF				REF	REF	REF	REF	REF	25	A3A3A1CR1319
P--H	5960-577-6084	....SEMICONDUCTOR, DIODE: 1N645 (81349)	EA	2				*	2	2	27	15	25	A3A3A1CR1305
P--H	5960-577-6084	....SEMICONDUCTOR, DIODE: 1N645 (81349)	EA	REF				REF	REF	REF	REF	REF	25	A3A3A1CR1306
P--H	5960-845-6458	....SEMICONDUCTOR, DIODE: 1N756A (81349)	EA	1				*	*	2	8	3	26	A3A3A1CR1318
P--H	5961-836-6667	....SEMICONDUCTOR, DIODE: 1N816 (81349)	EA	1				REF	REF	REF	REF	REF	26	A3A3A1CR1316
P--H	5960-752-6115	....SEMICONDUCTOR, DIODE: 1N964 (81349)	EA	1				*	*	2	8	3	25	A3A3A1CR1315
P--H	5961-851-8296	....SEMICONDUCTOR, DIODE: 1N967B (81349)	EA	1				*	2	2	19	10	25	A3A3A1CR1308
P--H	5961-686-8578	....TRANSISTOR: 2N338 (81349)	EA	4				REF	REF	REF	REF	REF	25	A3A3A1Q1301
P--H	5961-686-8578	....TRANSISTOR: 2N338 (81349)	EA	REF				REF	REF	REF	REF	REF	26	A3A3A1Q1302
P--H	5961-686-8578	....TRANSISTOR: 2N338 (81349)	EA	REF				REF	REF	REF	REF	REF	26	A3A3A1Q1303
P--H	5961-686-8578	....TRANSISTOR: 2N338 (81349)	EA	REF				REF	REF	REF	REF	REF	26	A3A3A1Q1307
P--D	5821-728-3122	...PC BOARD ASSEMBLY, AUDIO RECEIVER: SMD550113 (70117)	EA	1								2	26	A3A3A2

(1) SMR CODE	(2) FEDERAL STOCK NUMBER	(3) DESCRIPTION REFERENCE NUMBER & MFR. CODE / USABLE ON CODE	(4) UNIT OF MEAS	(5) QTY INC IN UNIT	(6) 30-DAY DS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(7) 30-DAY GS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(8) 1 YR ALW PER 100 EQUIP CNTGCY	(9) DEPOT MAINT ALW PER 100 EQUIP	(10) ILLUSTRATIONS (a) FIG NO.	(b) ITEM NO. OR REFERENCE DESIGNATION
P--H		...SCREW, MACHINE: SMB550157-2 (70117)	EA	4				REF	REF	REF	REF	REF	26	A3A3A2H4
X1-H		....BOARD, PC: SMD550309 (70117)	EA	1										A3A3A2E1
P--H	5910-883-8116	....CAPACITOR, FIXED, ELECTROLYTIC: CS13AC390K (81349)	EA	2				REF	REF	REF	REF	REF	26	A3A3A2C1308
P--H	5910-883-8116	....CAPACITOR, FIXED, ELECTROLYTIC: CS13AC390K (81349)	EA	REF				REF	REF	REF	REF	REF	25	A3A3A2C1311
P--H	5910-889-4503	....CAPACITOR, FIXED, ELECTROLYTIC: CS13AE100M (81349)	EA	3				REF	REF	REF	REF	REF	26	A3A3A2C1306
P--H	5910-889-4503	....CAPACITOR, FIXED, ELECTROLYTIC: CS13AE100M (81349)	EA	REF				REF	REF	REF	REF	REF	25	A3A3A2C1307
P--H	5910-889-4503	....CAPACITOR, FIXED, ELECTROLYTIC: CS13AE100M (81349)	EA	REF				REF	REF	REF	REF	REF	25	A3A3A2C1310
P--H	5910-823-1347	....CAPACITOR, FIXED, ELECTROLYTIC: CS13AF010M (81349)	EA	1				REF	REF	REF	REF	REF	25	A3A3A2C1320
P--H	5910-880-6080	....CAPACITOR, FIXED, MICA: CM06FD122G03 (81349)	EA	1				*	2	2	12	5	26	A3A3A2C1314
P--H	5910-045-5434	....CAPACITOR, FIXED, MICA: CM06FD272G03 (81349)	EA	1				*	2	2	12	5	26	A3A3A2C1312
P--H	5910-771-9090	....CAPACITOR, FIXED, MICA: CM07FD562G03 (81349)	EA	1				*	2	2	12	5	25	A3A3A2C1313
MD-H		....INSULATOR, DISK: SMB550063 (70117)	EA	3									26	A3A3A2E2
P--H	5905-817-7971	....RESISTOR, FIXED, COMPOSITION: RC07GF100J (81349)	EA	1				*	2	2	12	5	26	A3A3A2R1319
P--H	5905-726-5343	....RESISTOR, FIXED, COMPOSITION: RC07GF152K (81349)	EA	1				REF	REF	REF	REF	REF	25	A3A3A2R1323
P--H	5905-687-0000	....RESISTOR, FIXED, COMPOSITION: RC07GF183J (81349)	EA	2				REF	REF	REF	REF	REF	25	A3A3A2R1316
P--H	5905-687-0000	....RESISTOR, FIXED, COMPOSITION: RC07GF183J (81349)	EA	REF				REF	REF	REF	REF	REF	25	A3A3A2R1317
P--H	5905-725-6995	....RESISTOR, FIXED, COMPOSITION: RC07GF271K (81349)	EA	1				REF	REF	REF	REF	REF	25	A3A3A2R1324
P--H	5905-726-6441	....RESISTOR, FIXED, COMPOSITION: RC07GF561K (81349)	EA	1				REF	REF	REF	REF	REF	25	A3A3A2R1322
P--H	5905-691-0195	....RESISTOR, FIXED, COMPOSITION: RC07GF562J (81349)	EA	3				REF	REF	REF	REF	REF	25	A3A3A2R1318
P--H	5905-691-0195	....RESISTOR, FIXED, COMPOSITION: RC07GF562J (81349)	EA	REF				REF	REF	REF	REF	REF	26	A3A3A2R1320
P--H	5905-691-0195	....RESISTOR, FIXED, COMPOSITION: RC07GF562J (81349)	EA	REF				REF	REF	REF	REF	REF	26	A3A3A2R1327
P--H	5905-683-2235	....RESISTOR, FIXED, COMPOSITION: RC07GF680J (81349)	EA	1				REF	REF	REF	REF	REF	26	A3A3A2R1321
P--H	5905-195-6800	....RESISTOR, FIXED, COMPOSITION: RC20GF561J (81349)	EA	1				REF	REF	REF	REF	REF	25	A3A3A2R1325
P--H	5961-821-2309	....SEMICONDUCTOR, DIODE: 1N751A (81349)	EA	1				*	*	2	8	3	26	A3A3A2CR1309
P--H	5961-851-8296	....SEMICONDUCTOR, DIODE: 1N967B (81349)	EA	1				REF	REF	REF	REF	REF	26	A3A3A2CR1307

(1) SMR CODE	(2) FEDERAL STOCK NUMBER	(3) DESCRIPTION REFERENCE NUMBER & MFR. CODE / USABLE ON CODE	(4) UNIT OF MEAS	(5) QTY INC IN UNIT	(6) 30-DAY DS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(7) 30-DAY GS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(8) 1 YR ALW PER 100 EQUIP CNTGCY	(9) DEPOT MAINT ALW PER 100 EQUIP	(10) ILLUSTRATIONS (a) FIG NO.	(b) ITEM NO. OR REFERENCE DESIGNATION
P--H	5950-013-7272	....TRANSFORMER, AUDIO: SMC550052 (70117)	EA	1				*	*	2	8	3	26	A3A3A2T1301
P--H		....SCREW, MACHINE: SMB550157-2 (70117)	EA	4				REF	REF	REF	REF	REF	26	A3A3A2T1301H4
X1-H		....TRANSFORMER, AUDIO: 27933 (08742)	EA	1									26	A3A3A2T1302
P--H		....SCREW, MACHINE: SMB550157-2 (70117)	EA	4				REF	REF	REF	REF	REF	25	A3A3A2T1302H4
P--H	5961-686-8578	....TRANSISTOR: 2N338 (81349)	EA	1				REF	REF	REF	REF	REF	26	A3A3A2Q1304
P--H	5961-807-7339	....TRANSISTOR: 2N498 (81349)	EA	2				*	2	2	13	6	26	A3A3A2Q1305
P--H	5961-807-7339	....TRANSISTOR: 2N498 (81349)	EA	REF				REF	REF	REF	REF	REF	26	A3A3A2Q1306
MD-H		...PIN, GUIDE: SMB549783 (70117)	EA	2									26	A3A3MP2
P--H	5305-676-8146	...SCREW, SHOULDER: SMC549792-2 (70117)	EA	2				REF	REF	REF	REF	REF	25	A3A3H1
P--H	5940-644-8722	...TERMINAL, LUG: 4007-4 (77147)	EA	1				REF	REF	REF	REF	REF	25	A3A3E1
PH-F-S	5821-728-3655	..TRANSMITTER ASSEMBLY, AUDIO: SMD549679 (70117)	EA	1				*	*	*	5	2	3	A3A4
P--H	5910-829-2996	...CAPACITOR, FIXED, ELECTROLYTIC: CL65CJ820MP3 (81349)	EA	1				2	2	2	33	20	27	A3A4C1423
P--H	5910-902-3505	...CAPACITOR: CTM103VAJ (24446)	EA	1				*	2	2	19	10	27	A3A4C1425
X1-H		...CHASSIS: SMD549850 (70117)	EA	1										A3A4A1
X1-H		....CHASSIS: SMD549850-1 (70117)	EA	1										A3A4A1MP1
P--H	5935-615-8555	....JACK, TIP: SKT5BCWHITE (98291)	EA	2				REF	REF	REF	REF	REF	27	A3A4A1J1401
P--H	5935-615-8555	....JACK, TIP: SKT5BCWHITE (98291)	EA	REF				REF	REF	REF	REF	REF	27	A3A4A1J1402
P--D		...CONNECTOR, RECEPTACLE: DE15PC7 (91146)	EA	1								*	27	A3A4P1401
	5310-285-7085	...NUT, PLAIN, HEXAGON: MS20365-440A (96906)	EA	2				REF	REF	REF	REF	REF	27	A3A4P1401H2
	5305-770-2579	...SCREW, MACHINE MS51959-15 (96906)	EA	2				REF	REF	REF	REF	REF	27	A3A4P1401H2
P--H	5935-881-9480	...CONNECTOR, RECEPTACLE: 51-258 (98278)	EA	1				REF	REF	REF	REF	REF	27	A3A4P1402
P--D	5821-728-3650	...PC BOARD ASSEMBLY, AUDIO: SMD550117 (70117)	EA	1								2	27	A3A4A2
P--H		...SCREW, MACHINE: SMB550157-2 (70117)	EA	4				REF	REF	REF	REF	REF	27	A3A4A2H4
X1-H		....BOARD, PC: SMD550308 (70117)	EA	1										A3A4A2E1
P--H	5910-082-4893	....CAPACITOR, FIXED, CERAMIC: CK12AX332M (81349)	EA	3				2	2	2	46	30	28	A3A4A2C1409

(1) SMR CODE	(2) FEDERAL STOCK NUMBER	(3) DESCRIPTION REFERENCE NUMBER & MFR. CODE / USABLE ON CODE	(4) UNIT OF MEAS	(5) QTY INC IN UNIT	(6) 30-DAY DS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(7) 30-DAY GS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(8) 1 YR ALW PER 100 EQUIP CNTGCY	(9) DEPOT MAINT ALW PER 100 EQUIP	(10) ILLUSTRATIONS (a) FIG NO.	(b) ITEM NO. OR REFERENCE DESIGNATION
P--H	5910-082-4893	....CAPACITOR, FIXED, CERAMIC: CK13AX332M (81349)	EA	REF				REF	REF	REF	REF	REF	28	A3A4A2C1412
P--H	5910-082-4893	....CAPACITOR, FIXED, CERAMIC: CK13AX332M (81349)	EA	REF				REF	REF	REF	REF	REF	29	A3A4A2C1414
P--H	5910-710-0022	....CAPACITOR, FIXED, CERAMIC: CK14AX103M (81349)	EA	1				REF	REF	REF	REF	REF	29	A3A4A2C1420
P--H	5910-775-3666	....CAPACITOR, FIXED, CERAMIC: MC80V333AM (04222)	EA	1				*	2	2	12	5	29	A3A4A2C1401
X1-H		....CAPACITOR, FIXED, CERAMIC: 8131-037T2H0131K (72982)	EA	1									28	A3A4A2C1416
P--H	5910-985-4719	....CAPACITOR, FIXED, ELECTROLYTIC: CS13AB470M (81349)	EA	2				*	2	2	19	10	29	A3A4A2C1404
P--H	5910-985-4719	....CAPACITOR, FIXED, ELECTROLYTIC: CS13AB470M (81349)	EA	REF				REF	REF	REF	REF	REF	29	A3A4A2C1408
P--H	5910-057-4306	....CAPACITOR, FIXED, ELECTROLYTIC: CS13AC4R7M (81349)	EA	1				REF	REF	REF	REF	REF	28	A3A4A2C1402
P--H	5910-082-4816	....CAPACITOR, FIXED, ELECTROLYTIC: CS13AE1R5M (81349)	EA	1				*	2	2	12	5	29	A3A4A2C1410
P--H	5910-989-9695	....CAPACITOR, FIXED, ELECTROLYTIC: CS13AE2R2M (81349)	EA	4				REF	REF	REF	REF	REF	29	A3A4A2C1403
P--H	5910-989-9695	....CAPACITOR, FIXED, ELECTROLYTIC: CS13AE2R2M (81349)	EA	REF				REF	REF	REF	REF	REF	28	A3A4A2C1406
P--H	5910-989-9695	....CAPACITOR, FIXED, ELECTROLYTIC: CS13AE2R2M (81349)	EA	REF				REF	REF	REF	REF	REF	28	A3A4A2C1407
P--H	5910-989-9695	....CAPACITOR, FIXED, ELECTROLYTIC: CS13AE2R2M (81349)	EA	REF				REF	REF	REF	REF	REF	28	A3A4A2C1424
P--H	5910-850-1501	....CAPACITOR, FIXED, ELECTROLYTIC: CS13AE8R2K (81349)	EA	1				*	2	2	19	10	28	A3A4A2C1411
P--H	5910-889-4503	....CAPACITOR, FIXED, ELECTROLYTIC: CS13AE100M (81349)	EA	1				REF	REF	REF	REF	REF	29	A3A4A2C1422
P--H	5910-851-6714	....CAPACITOR, FIXED, ELECTROLYTIC: CS13AF010K (81349)	EA	1				*	2	2	19	10	28	A3A4A2C1421
P--H	5910-839-3950	....CAPACITOR, FIXED, ELECTROLYTIC: 150D104X9035A2 (55289)	EA	1				*	2	2	19	10	28	A3A4A2C1405
P--H	5910-781-1154	....CAPACITOR, FIXED, MICA: CM06FD152G03 (81349)	EA	1				*	2	2	12	5	29	A3A4A2C1418
P--H	5910-728-4093	....CAPACITOR, FIXED, MICA: CM06F182G03 (81349)	EA	1				*	2	2	12	5	29	A3A4A2C1417
P--H	5910-804-2394	....CAPACITOR, FIXED, MICA: CM15B180K03 (81349)	EA	1				*	2	2	12	5	28	A3A4A2C1413
P--H	5910-728-4094	....CAPACITOR, FIXED, MICA: DM19F622G0300WV4CR (84171)	EA	1				*	2	2	12	5	28	A3A4A2C1419
P--H	5950-878-2442	....COIL, RF: 2500-62 (99800)	EA	1				REF	REF	REF	REF	REF	28	A3A4A2L1402
P--H	5950-089-3021	....COIL, RF: 9936 (03550)	EA	1				*	2	2	16	8	28	A3A4A2L1401
MD-H		....INSULATOR, DISK: SMB550063 (70117)	EA	3									28	A3A4A2E1403
P--H	5905-683-7721	....RESISTOR, FIXED, COMPOSITION: RC07GF101J (81349)	EA	1				REF	REF	REF	REF	REF	29	A3A4A2R1414

(1) SMR CODE	(2) FEDERAL STOCK NUMBER	(3) DESCRIPTION REFERENCE NUMBER & MFR. CODE / USABLE ON CODE	(4) UNIT OF MEAS	(5) QTY INC IN UNIT	(6) 30-DAY DS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(7) 30-DAY GS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(8) 1 YR ALW PER 100 EQUIP CNTGCY	(9) DEPOT MAINT ALW PER 100 EQUIP	(10) ILLUSTRATIONS (a) FIG NO.	(b) ITEM NO. OR REFERENCE DESIGNATION
P--H	5905-816-8554	....RESISTOR, FIXED, COMPOSITION: RC07GF103K (81349)	EA	2				REF	REF	REF	REF	REF	29	A3A4A2R1415
P--H	5905-816-8554	....RESISTOR, FIXED, COMPOSITION: RC07GF103K (81349)	EA	REF				REF	REF	REF	REF	REF	28	A3A4A2R1420
P--H	5905-686-4529	....RESISTOR, FIXED, COMPOSITION: RC07GF123K (81349)	EA	1				REF	REF	REF	REF	REF	28	A3A4A2R1407
P--H	5905-683-7723	....RESISTOR, FIXED, COMPOSITION: RC07GF152J (81349)	EA	1				*	2	2	19	10	29	A3A4A2R1416
P--H	5905-726-6435	....RESISTOR, FIXED, COMPOSITION: RC07GF222K (81349)	EA	1				REF	REF	REF	REF	REF	28	A3A4A2R1421
P--H	5905-752-3156	....RESISTOR, FIXED, COMPOSITION: RC07GF223K (81349)	EA	2				REF	REF	REF	REF	REF	29	A3A4A2R1418
P--H	5905-752-3156	....RESISTOR, FIXED, COMPOSITION: RC07GF223K (81349)	EA	REF				REF	REF	REF	REF	REF	28	A3A4A2R1424
P--H	5905-725-6995	....RESISTOR, FIXED, COMPOSITION: RC07GF271J (81349)	EA	1				*	2	2	12	5	29	A3A4A2R1409
P--H	5905-686-3798	....RESISTOR, FIXED, COMPOSITION: RC07GF272J (81349)	EA	1				*	2	2	12	5	29	A3A4A2R1403
P--H	5905-686-3369	....RESISTOR, FIXED, COMPOSITION: RC07GF331J (81349)	EA	1				*	2	2	12	5	28	A3A4A2R1431
P--H	5905-686-4528	....RESISTOR, FIXED, COMPOSITION: RC07GF332K (81349)	EA	1				REF	REF	REF	REF	REF	29	A3A4A2R1425
P--H	5905-686-3903	....RESISTOR, FIXED, COMPOSITION: RC07GF333J (81349)	EA	1				*	2	2	19	10	28	A3A4A2R1404
P--H	5905-811-0674	....RESISTOR, FIXED, COMPOSITION: RC07GF391K (81349)	EA	1				*	2	2	12	5	28	A3A4A2R1405
P--H	5905-805-9713	....RESISTOR, FIXED, COMPOSITION: RC07GF431J (81349)	EA	1				*	2	2	12	5	28	A3A4A2R1417
P--H	5905-686-9998	....RESISTOR, FIXED, COMPOSITION: RC07GF472J (81349)	EA	2				REF	REF	REF	REF	REF	28	A3A4A2R1410
P--H	5905-686-9998	....RESISTOR, FIXED, COMPOSITION: RC07GF472J (81349)	EA	REF				REF	REF	REF	REF	REF	29	A3A4A2R1426
P--H	5905-688-4447	....RESISTOR, FIXED, COMPOSITION: RC07GF473K (81349)	EA	1				REF	REF	REF	REF	REF	28	A3A4A2R1422
P--H	5905-683-7720	....RESISTOR, FIXED, COMPOSITION: RC07GF510J (81349)	EA	1				*	2	2	12	5	29	A3A4A2R1401
P--H	5905-726-6834	....RESISTOR, FIXED, COMPOSITION: RC07GF562K (81349)	EA	3				REF	REF	REF	REF	REF	29	A3A4A2R1406
P--H	5905-726-6834	....RESISTOR, FIXED, COMPOSITION: RC07GF562K (81349)	EA	REF				REF	REF	REF	REF	REF	28	A3A4A2R1419
P--H	5905-726-6834	....RESISTOR, FIXED, COMPOSITION: RC07GF562K (81349)	EA	REF				REF	REF	REF	REF	REF	28	A3A4A2R1423
P--H	5905-686-9997	....RESISTOR, FIXED, COMPOSITION: RC07GF682J (81349)	EA	3				REF	REF	REF	REF	REF	28	A3A4A2R1408
P--H	5905-686-9997	....RESISTOR, FIXED, COMPOSITION: RC07GF682J (81349)	EA	REF				REF	REF	REF	REF	REF	29	A3A4A2R1411
P--H	5905-686-9997	....RESISTOR, FIXED, COMPOSITION: RC07GF682J (81349)	EA	REF				REF	REF	REF	REF	REF	29	A3A4A2R1427
P--H	5905-834-9874	....RESISTOR, FIXED, COMPOSITION: RC07GF822K (81349)	EA	3				REF	REF	REF	REF	REF	28	A3A4A2R1428

(1) SMR CODE	(2) FEDERAL STOCK NUMBER	(3) DESCRIPTION REFERENCE NUMBER & MFR. CODE / USABLE ON CODE	(4) UNIT OF MEAS	(5) QTY INC IN UNIT	(6) 30-DAY DS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(7) 30-DAY GS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(8) 1 YR ALW PER 100 EQUIP CNTGCY	(9) DEPOT MAINT ALW PER 100 EQUIP	(10) ILLUSTRATIONS (a) FIG NO.	(b) ITEM NO. OR REFERENCE DESIGNATION
P--H	5905-834-9874	....RESISTOR, FIXED, COMPOSITION: RC07GF822K (81349)	EA	REF				REF	REF	REF	REF	REF	29	A3A4A2R1429
P--H	5905-834-9874	....RESISTOR, FIXED, COMPOSITION: RC07GF822K (81349)	EA	REF				REF	REF	REF	REF	REF	29	A3A4A2R1430
P--H	5905-752-3158	....RESISTOR, FIXED, COMPOSITION: RC07GF823K (81349)	EA	1				*	2	2	12	5	28	A3A4A2R1412
P--H	5905-192-3972	....RESISTOR, FIXED, COMPOSITION: RC20GF391K (81349)	EA	1				*	2	2	19	10	29	A3A4A2R1432
X1-H		....RESISTOR, VARIABLE: CT200-00-10K (75042)	EA	1									28	A3A4A2R1413
X1-H		....RESISTOR, VARIABLE: CT200-00-100 (75042)	EA	1									28	A3A4A2R1402
X1-H		....RESISTOR, VARIABLE, WIRE WOUND: CT200-00-20K (75042)	EA	1									28	A3A4A2R1436
	5310-271-4640	....NUT, PLAIN, HEXAGON: MS35649-24 (96906)	EA	2				REF	REF	REF	REF	REF	28	A3A4A2R1436H2
	5305-054-5642	....SCREW, MACHINE: MS51957-8 (96906)	EA	2				REF	REF	REF	REF	REF	29	A3A4A2R1436H2
P--H	5961-728-5965	....SEMICONDUCTOR, DIODE: PS1862 (01281)	EA	1				*	*	2	8	3	29	A3A4A2C1415
P--H	5960-615-0095	....SEMICONDUCTOR, DIODE: 1N276 (81349)	EA	2				REF	REF	REF	REF	REF	28	A3A4A2CR1403
P--H	5960-615-0095	....SEMICONDUCTOR, DIODE: 1N276 (81349)	EA	REF				REF	REF	REF	REF	REF	28	A3A4A2CR1406
P--H	5961-853-1065	....SEMICONDUCTOR, DIODE: 1N3026B (81349)	EA	1				REF	REF	REF	REF	REF	29	A3A4A2CR1401
P--H	5961-821-2315	....SEMICONDUCTOR, DIODE: 1N707A (82577)	EA	1				*	2	2	13	6	29	A3A4A2CR1402
P--H	5950-763-0507	....TRANSFORMER, AUDIO: SMC550047 (70117)	EA	1				*	*	2	8	3	29	A3A4A2T1401
P--H	5961-050-7499	....TRANSISTOR: 2N2219 (81349)	EA	1				*	2	2	13	6	28	A3A4A2Q1403
P--H	5961-686-8578	....TRANSISTOR: 2N338 (81349)	EA	2				REF	REF	REF	REF	REF	29	A3A4A2Q1402
P--H	5961-686-8578	....TRANSISTOR: 2N338 (81349)	EA	REF				REF	REF	REF	REF	REF	29	A3A4A2Q1401
MD-H		...PIN, GUIDE: SMB549783 (70117)	EA	1									27	A3A4MP1
P--H	5821-719-5413	...PLATE, SHIELD: SMC549839 (70117)	EA	1				*	*	*	5	2	27	A3A4A3
P--H		...SCREW, MACHINE: SMB550157-2 (70117)	EA	4				REF	REF	REF	REF	REF	27	A3A4A3H4
X1-H		....CLIP, SPRING TENSION: 6002-42A (91506)	EA	1										A3A4A3MP1
	5320-721-5242	....RIVET, TUBULAR: MS16535-75 (96906)	EA	2				*	*	*	*	*	27	A3A4A3MP1H2
X1-H		....PLATE: SMC549839-1 (70117)	EA	1										A3A4A3MP2
P--H	5945-728-5973	...RELAY, ARMATURE: SMD504616 (70117)	EA	1				REF	REF	REF	REF	REF	27	A3A4K1401

(1) SMR CODE	(2) FEDERAL STOCK NUMBER	(3) DESCRIPTION REFERENCE NUMBER & MFR. CODE USABLE ON CODE	(4) UNIT OF MEAS	(5) QTY INC IN UNIT	(6) 30-DAY DS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(7) 30-DAY GS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(8) 1 YR ALW PER 100 EQUIP CNTGCY	(9) DEPOT MAINT ALW PER 100 EQUIP	(10) ILLUSTRATIONS (a) FIG NO.	(b) ITEM NO. OR REFERENCE DESIGNATION
	5310-271-4642	...NUT, PLAIN, HEXAGON: MS35649-44 (96906)	EA	2				REF	REF	REF	REF	REF	27	A3A4K1401H2
P--H		...SCREW, MACHINE: SMB550157-2 (70117)	EA	2				REF	REF	REF	REF	REF	27	A3A4K1401H2
P--D		...RESISTOR, FIXED, COMPOSITION: RC07GF100K (81349)	EA	1								*	27	A3A4R1434
P--H	5905-683-7723	...RESISTOR, FIXED, COMPOSITION: RC07GF152J (81349)	EA	1				REF	REF	REF	REF	REF	27	A3A4R1433
P--H	5905-681-9970	...RESISTOR, FIXED, COMPOSITION: RC07GF822J (81349)	EA	1				REF	REF	REF	REF	REF	27	A3A4R1435
P--H	5305-676-8146	...SCREW, SHOULDER: SMC549792-2 (70117)	EA	2				REF	REF	REF	REF	REF	27	A3A4H1
P--H	5961-370-1645	...SEMICONDUCTOR, DIODE: 1N475 (81349)	EA	1				*	*	2	8	3	27	A3A4CR1404
P--H	5961-087-6047	...SEMICONDUCTOR, DIODE: 1N645 (81349)	EA	1				REF	REF	REF	REF	REF	27	A3A4CR1405
MD-H		...TERMINAL, STUD: SMB549953 (70117)	EA	3									27	A3A4E1
	5305-054-5635	...SCREW, MACHINE: MS51957-1 (96906)	EA	3				REF	REF	REF	REF	REF	27	A3A4E1H3
P--H	5940-644-8722	...TERMINAL, LUG: 4007-4 (77147)	EA	1				REF	REF	REF	REF	REF	27	A3A4E2
PH-F-S	5821-728-3254	..POWER SUPPLY: SMD549680 (70117)	EA	1				*	*	*	5	2	3	A3A5
MD-H		...BRACKET, ANGLE: SMC549896 (70117)	EA	1									31	A3A5MP1
	5305-770-2579	...SCREW, MACHINE: MS51959-15 (96906)	EA	2				REF	REF	REF	REF	REF	31	A3A5MP1H2
A--H		...CABLE ASSEMBLY: 516-2727-001 (13499)	EA	1									30	A3A5W1
	5310-088-0551	...NUT, PLAIN, HEXAGON: MS21044N04 (96906)	EA	2				*	*	*	*	*	30	A3A5W1H2
	5305-770-2579	...SCREW, MACHINE: MS51959-15 (96906)	EA	2				REF	REF	REF	REF	REF	30	A3A5W1H2
	5310-042-9609	...WASHER, LOCK: MS35338-78 (96906)	EA	1				REF	REF	REF	REF	REF	30	A3A5W1H1
P--H	5935-823-0778	....CONNECTOR, PLUG, ELECTRICAL: DA15PC7 (91146)	EA	1				*	2	2	19	10	30	A3A5W1P1501
P--H	5910-823-1657	...CAPACITOR, FIXED, ELECTROLYTIC: CL25BJ600UP3 (81349)	EA	1				*	2	2	19	10	31	A3A5C1501
P--D		...CAPACITOR, FIXED, ELECTROLYTIC: T0536 (14433)	EA	1								*	31	A3A5C1508
	5305-054-5646	...SCREW, MACHINE: MS51957-12 (96906)	EA	2				REF	REF	REF	REF	REF	30	A3A5C1508H2
X1-H		...CHASSIS: SMD549934 (70117)	EA	1										A3A5A1
X1-H		....CHASSIS: SMD549934-1 (70117)	EA	1										A3A5A1MP1
P--H	5340-721-4845	....CLIP, SPRING TENSION: 6008-7A (91506)	EA	1				*	2	2	12	5	31	A3A5A1MP2

(1) SMR CODE	(2) FEDERAL STOCK NUMBER	(3) DESCRIPTION REFERENCE NUMBER & MFR. CODE / USABLE ON CODE	(4) UNIT OF MEAS	(5) QTY INC IN UNIT	(6) 30-DAY DS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(7) 30-DAY GS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(8) 1 YR ALW PER 100 EQUIP CNTGCY	(9) DEPOT MAINT ALW PER 100 EQUIP	(10) ILLUSTRATIONS (a) FIG NO.	(b) ITEM NO. OR REFERENCE DESIGNATION
P--H		....RIVET, TUBULAR: R4008X5-32LG (12014)	EA	2				*	*	*	*	*	31	A3A5A1MP2H2
MD-H		....NUT, SLEEVE: SMB549827 (70117)	EA	2									30	A3A5A1H1
P--D	5821-728-3175	...PC BOARD ASSEMBLY, POWER SUPPLY: SMD549694 (70117)	EA	1								2	30	A3A5A2
P--H		...SCREW, MACHINE: SMB550157-2 (70117)	EA	4				REF	REF	REF	REF	REF	30	A3A5A2H4
X1-H		....BOARD, PC: SMD550300 (70117)	EA	1										A3A5A2E1
P--H	5910-829-2996	....CAPACITOR, FIXED, ELECTROLYTIC: CL65CJ820MP3 (81349)	EA	1				REF	REF	REF	REF	REF	30	A3A5A2C1504
P--H	5910-056-8628	....CAPACITOR, FIXED, ELECTROLYTIC: CS13AD3R3M (81349)	EA	1				*	2	2	19	10	30	A3A5A2C1506
MD-H		....INSULATOR, DISK: A10104 (07047)	EA	1									30	A3A5A2E2
P--H	5905-726-6433	....RESISTOR, FIXED, COMPOSITION: RC07GF222K (81349)	EA	1				REF	REF	REF	REF	REF	30	A3A5A2R1504
P--H	5905-249-4248	....RESISTOR, FIXED, COMPOSITION: RC20GF333K (81349)	EA	1				*	2	2	12	5	30	A3A5A2R1510
P--H	5905-279-1876	....RESISTOR, FIXED, COMPOSITION: RC20GF390K (81349)	EA	1				*	2	2	12	5	30	A3A5A2R1511
P--H	5905-299-2004	....RESISTOR, FIXED, COMPOSITION: RC32GF104K (81349)	EA	2				*	2	2	19	10	30	A3A5A2R1513
P--H	5905-299-2004	....RESISTOR, FIXED, COMPOSITION: RC32GF104K (81349)	EA	REF				REF	REF	REF	REF	REF	30	A3A5A2R1514
P--H	5905-279-1739	....RESISTOR, FIXED, COMPOSITION: RC32GF220K (81349)	EA	1				*	2	2	12	5	30	A3A5A2R1512
P--H	5905-247-9329	....RESISTOR, FIXED, COMPOSITION: RC42GF472K (81349)	EA	1				*	2	2	12	5	30	A3A5A2R1501
P--H	5905-883-3718	....RESISTOR, FIXED, WIRE WOUND: RW59VR39 (81349)	EA	1				*	2	2	19	10	30	A3A5A2R1515
P--H	5961-811-8372	....SEMICONDUCTOR, DIODE: 1N3189 (81349)	EA	3				REF	REF	REF	REF	REF	30	A3A5A2CR1502
P--H	5961-811-8372	....SEMICONDUCTOR, DIODE: 1N3189 (81349)	EA	REF				REF	REF	REF	REF	REF	30	A3A5A2CR1503
P--H	5961-811-8372	....SEMICONDUCTOR, DIODE: 1N3189 (81349)	EA	REF				REF	REF	REF	REF	REF	30	A3A5A2CR1508
P--H	5961-972-9395	....SEMICONDUCTOR, DIODE: 1N3256 (81349)	EA	4				*	2	2	19	10	30	A3A5A2CR1504
P--H	5961-972-9395	....SEMICONDUCTOR, DIODE: 1N3256 (81349)	EA	REF				REF	REF	REF	REF	REF	30	A3A5A2CR1505
P--H	5961-972-9395	....SEMICONDUCTOR, DIODE: 1N3256 (81349)	EA	REF				REF	REF	REF	REF	REF	30	A3A5A2CR1506
P--H	5961-972-9395	....SEMICONDUCTOR, DIODE: 1N3256 (81349)	EA	REF				REF	REF	REF	REF	REF	30	A3A5A2CR1507
P--H	5961-087-6047	....SEMICONDUCTOR, DIODE: 1N645 (81349)	EA	2				REF	REF	REF	REF	REF	30	A3A5A2CR1501
P--H	5961-087-6047	....SEMICONDUCTOR, DIODE: 1N645 (81349)	EA	REF				REF	REF	REF	REF	REF	30	A3A5A2CR1511

(1) SMR CODE	(2) FEDERAL STOCK NUMBER	(3) DESCRIPTION REFERENCE NUMBER & MFR. CODE / USABLE ON CODE	(4) UNIT OF MEAS	(5) QTY INC IN UNIT	(6) 30-DAY DS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(7) 30-DAY GS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(8) 1 YR ALW PER 100 EQUIP CNTGCY	(9) DEPOT MAINT ALW PER 100 EQUIP	(10) ILLUSTRATIONS (a) FIG NO.	(b) ITEM NO. OR REFERENCE DESIGNATION
P--H	5961-821-2315	....SEMICONDUCTOR, DIODE: 1N707A (81349)	EA	1				REF	REF	REF	REF	REF	30	A3A5A2CR1510
P--H	5961-958-8169	....TRANSISTOR: 2N1483 (81349)	EA	1				*	*	2	8	3	30	A3A5A2Q1504
P--D	5821-728-3272	...PC BOARD ASSEMBLY, POWER SUPPLY: SMD550085 (70117)	EA	1								2	31	A3A5A3
	5305-054-5646	...SCREW, MACHINE: MS51957-12 (96906)	EA	4				REF	REF	REF	REF	REF	31	A3A5A3H4
X1-H		....BOARD, PC: SMD550301 (70117)	EA	1										A3A5A3E1
P--H	5910-087-9711	....CAPACITOR, FIXED, ELECTROLYTIC: CL65CH150MP3 (81349)	EA	2				2	2	2	33	20	31	A3A5A3C1502
P--H	5910-087-9711	....CAPACITOR, FIXED, ELECTROLYTIC: CL65CH150MP3 (81349)	EA	REF				REF	REF	REF	REF	REF	31	A3A5A3C1503
MD-H		....HEAT SINK: SMC549885 (70117)	EA	3									31	A3A5A3E2
P--H	5905-889-0010	....RESISTOR, FIXED, WIRE WOUND: RW69V100 (81349)	EA	2				2	2	2	33	20	31	A3A5A3R1506
P--H	5905-889-0010	....RESISTOR, FIXED, WIRE WOUND: RW69V100 (81349)	EA	REF				REF	REF	REF	REF	REF	31	A3A5A3R1507
P--H	5905-761-3921	....RESISTOR, FIXED, WIRE WOUND: SMB550070 (70117)	EA	2				2	2	2	33	20	31	A3A5A3R1508
P--H	5905-761-3921	....RESISTOR, FIXED, WIRE WOUND: SMB550070 (70117)	EA	REF				REF	REF	REF	REF	REF	31	A3A5A3R1509
P--H	5940-501-8634	....TERMINAL, LUG: 4021 (77147)	EA	3				REF	REF	REF	REF	REF	31	A3A5A3E3
	5310-270-8810	....NUT, PLAIN, HEXAGON: MS35650-104 (96906)	EA	3				*	*	*	*	*	31	A3A5A3E3H3
	5310-058-2951	....WASHER, LOCK: MS35337-81 (96906)	EA	3				REF	REF	REF	REF	REF	31	A3A5A3E3H3
P--H	5961-802-7965	....TRANSISTOR: 2N1099 (81349)	EA	1				*	*	2	8	3	31	A3A5A3Q1501
	5305-054-5636	....SCREW, MACHINE: MS51957-2 (96906)	EA	2				*	*	*	*	*	31	A3A5A3Q1501H2
P--H	5961-615-0759	....TRANSISTOR: 2N174 (81349)	EA	2				*	2	2	13	6	31	A3A5A3Q1502
	5305-054-5636	....SCREW, MACHINE: MS51957-2 (96906)	EA	2				REF	REF	REF	REF	REF	31	A3A5A3Q1502H2
P--H	5961-615-0759	....TRANSISTOR: 2N174 (81349)	EA	REF				REF	REF	REF	REF	REF	31	A3A5A3Q1503
	5305-054-5636	....SCREW, MACHINE: MS51957-2 (96906)	EA	2				REF	REF	REF	REF	REF	31	A3A5A3Q1503H2
MD-H		...PIN, GUIDE: SMB549783 (70117)	EA	2									30	A3A5MP2
MD-H		...PLATE, COVER: SMC549838 (70117)	EA	1									32	A3A5A4
	5305-764-2966	...SCREW, MACHINE: MS51959-2 (96906)	EA	4				REF	REF	REF	REF	REF	32	A3A5A4H4
P--H	5935-615-8555	....JACK TIP: SKT5BCWHITE (98291)	EA	6				REF	REF	REF	REF	REF	32	A3A5A4J1501

(1) SMR CODE	(2) FEDERAL STOCK NUMBER	(3) DESCRIPTION REFERENCE NUMBER & MFR. CODE / USABLE ON CODE	(4) UNIT OF MEAS	(5) QTY INC IN UNIT	(6) 30-DAY DS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(7) 30-DAY GS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(8) 1 YR ALW PER 100 EQUIP CNTGCY	(9) DEPOT MAINT ALW PER 100 EQUIP	(10) ILLUSTRATIONS (a) FIG NO.	(b) ITEM NO. OR REFERENCE DESIGNATION
P--H	5935-615-8555	....JACK TIP: SKT5BCWHITE (98291)	EA	REF				REF	REF	REF	REF	REF	32	A3A5A4J1502
P--H	5935-615-8555	....JACK TIP: SKT5BCWHITE (98291)	EA	REF				REF	REF	REF	REF	REF	32	A3A5A4J1503
P--H	5935-615-8555	....JACK TIP: SKT5BCWHITE (98291)	EA	REF				REF	REF	REF	REF	REF	32	A3A5A4J1504
P--H	5935-615-8555	....JACK TIP: SKT5BCWHITE (98291)	EA	REF				REF	REF	REF	REF	REF	32	A3A5A4J1505
P--H	5935-615-8555	....JACK TIP: SKT5BCWHITE (98291)	EA	REF				REF	REF	REF	REF	REF	32	A3A5A4J1506
MD-H		....PLATE, COVER: SMC549838-1 (70117)	EA	1									32	A3A5A4MP1
P--H	5950-763-2247	...REACTOR: SMC550029 (70117)	EA	1				*	*	2	10	4	30	A3A5T1501
	5305-054-5646	...SCREW, MACHINE: MS51957-12 (96906)	EA	2				REF	REF	REF	REF	REF	30	A3A5T1501H2
	5310-042-9609	...WASHER, LOCK: MS35338-78 (96906)	EA	2				REF	REF	REF	REF	REF	30	A3A5T1501H2
P--H	5945-089-0733	...RELAY, ARMATURE: 3SAF1170 (01526)	EA	1				*	2	2	16	8	32	A3A5K1501
	5310-088-0551	...NUT, PLAIN, HEXAGON: MS21044N04 (96906)	EA	2				REF	REF	REF	REF	REF	32	A3A5K1501H2
	5305-763-7822	...SCREW, MACHINE: MS51959-14 (96906)	EA	2				REF	REF	REF	REF	REF	32	A3A5K1501H2
P--H	5905-726-8451	...RESISTOR, FIXED, WIRE WOUND: RW57V141 (00213)	EA	2				2	2	2	33	20	32	A3A5R1502
P--H	5905-726-8451	...RESISTOR, FIXED, WIRE WOUND: RW57V141 (00213)	EA	REF				REF	REF	REF	REF	REF	32	A3A5R1503
P--H	5905-951-8105	...RESISTOR, FIXED, WIRE WOUND: RW67V270 (81349)	EA	1				*	2	2	19	10	32	A3A5R1505
P--H	5305-676-8146	...SCREW, SHOULDER: SMC549792-2 (70117)	EA	4				REF	REF	REF	REF	REF	32	A3A5H1
P--H	5961-878-0844	...SEMICONDUCTOR, DIODE: 1N3324B (81349)	EA	1				*	*	2	8	3	32	A3A5CR1509
P--H	5940-665-5592	...TERMINAL, LUG: 4012 (77147)	EA	1				*	2	2	19	10	31	A3A5E1
MD-H		...TERMINAL, STUD: SMB549953 (70117)	EA	8									31	A3A5E2
	5305-764-2966	...SCREW, MACHINE: MS51959-2 (96906)	EA	8				REF	REF	REF	REF	REF	31	A3A5E2H8
P--H	5950-728-5996	...TRANSFORMER, STEP UP: SMC550071 (70117)	EA	1				*	*	2	8	3	30	A3A5T1503
	5305-054-5646	...SCREW, MACHINE: MS51957-12 (96906)	EA	2				REF	REF	REF	REF	REF	30	A3A5T1503H2
	5310-042-9609	...WASHER, LOCK: MS35338-78 (96906)	EA	2				REF	REF	REF	REF	REF	30	A3A5T1503H2
P--H	5950-728-5999	...TRANSFORMER, STEP UP: SMC550080 (70117)	EA	1				*	*	2	8	3	30	A3A5T1502
	5305-054-5646	...SCREW, MACHINE: MS51957-12 (96906)	EA	2				REF	REF	REF	REF	REF	30	A3A5T1502H2

(1) SMR CODE	(2) FEDERAL STOCK NUMBER	(3) DESCRIPTION REFERENCE NUMBER & MFR. CODE / USABLE ON CODE	(4) UNIT OF MEAS	(5) QTY INC IN UNIT	(6) 30-DAY DS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(7) 30-DAY GS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(8) 1 YR ALW PER 100 EQUIP CNTGCY	(9) DEPOT MAINT ALW PER 100 EQUIP	(10) ILLUSTRATIONS (a) FIG NO.	(b) ITEM NO. OR REFERENCE DESIGNATION
	5310-042-9609	...WASHER, LOCK: MS35338-78 (96906)	EA	2				REF	REF	REF	REF	REF	30	A3A5T1502H2
PH-F-S	5821-764-5384	..SELECT CALL ASSEMBLY: SMD549681 (70117)	EA	1				*	*	*	5	2	3	A3A6
X1-H		...CHASSIS: SMD549960 (70117)	EA	1										A3A6A1
X1-H		....CHASSIS: SMD549960-1 (70117)	EA	1										A3A6A1MP1
P--H	5935-615-8555	....JACK TIP: SKT5BCWHITE (98291)	EA	2				REF	REF	REF	REF	REF	33	A3A6A1J101
P--H	5935-615-8555	....JACK TIP: SKT5BCWHITE (98291)	EA	REF				REF	REF	REF	REF	REF	33	A3A6A1J103
P--H	5935-617-6837	....JACK, TIP: SKT10WHITE (98291)	EA	1				*	*	2	10	4	33	A3A6A1J102
P--D		...CONNECTOR, RECEPTACLE: DE15PC7 (91146)	EA	1								REF	33	A3A6P101
	5310-285-7085	...NUT, PLAIN, HEXAGON: MS20365-440A (96906)	EA	2				REF	REF	REF	REF	REF	33	A3A6P101H2
P--H	5305-770-2579	...SCREW, MACHINE: MS51959-15 (96906)	EA	2				REF	REF	REF	REF	REF	33	A3A6P101H2
P--D	5821-226-4198	...PC BOARD ASSEMBLY, SELECT CALL: SMD549696 (70117)	EA	1								2	33	A3A6A2
P--H		...SCREW, MACHINE: SMB550157-2 (70117)	EA	4				REF	REF	REF	REF	REF	33	A3A6A2H4
X1-H		....BOARD, PC: SMD550290 (70117)	EA	1										A3A6A2E1
P--H	5910-889-4503	....CAPACITOR, FIXED, ELECTROLYTIC: CS13AE100M (81349)	EA	1				REF	REF	REF	REF	REF	33	A3A6A2C102
P--H	5910-823-1347	....CAPACITOR, FIXED, ELECTROLYTIC: CS13AF010M (81349)	EA	5				REF	REF	REF	REF	REF	33	A3A6A2C101
P--H	5910-823-1347	....CAPACITOR, FIXED, ELECTROLYTIC: CS13AF010M (81349)	EA	REF				REF	REF	REF	REF	REF	33	A3A6A2C111
P--H	5910-823-1347	....CAPACITOR, FIXED, ELECTROLYTIC: CS13AF010M (81349)	EA	REF				REF	REF	REF	REF	REF	33	A3A6A2C112
P--H	5910-823-1347	....CAPACITOR, FIXED, ELECTROLYTIC: CS13AF010M (81349)	EA	REF				REF	REF	REF	REF	REF	33	A3A6A2C114
P--H	5910-823-1347	....CAPACITOR, FIXED, ELECTROLYTIC: CS13AF010M (81349)	EA	REF				REF	REF	REF	REF	REF	33	A3A6A2C115
X1-H		....CAPACITOR, FIXED, GLASS: CY31C472G (81349)	EA	1									33	A3A6A2C113
P--H	5910-952-6432	....CAPACITOR, FIXED, MICA: CM06F561J03 (81349)	EA	1				*	2	2	12	5	33	A3A6A2C104
MD-H		....INSULATOR, DISK: SMB550063 (70117)	EA	4									33	A3A6A2E2
P--H	5950-852-2395	....REACTOR: 27935 (08742)	EA	1				*	*	2	10	4	33	A3A6A2L101
P--H	5905-816-8554	....RESISTOR, FIXED, COMPOSITION: RC07GF103K (81349)	EA	2				REF	REF	REF	REF	REF	33	A3A6A2R125
P--H	5905-816-8554	....RESISTOR, FIXED, COMPOSITION: RC07GF103K (81349)	EA	REF				REF	REF	REF	REF	REF	33	A3A6A2R131

(1) SMR CODE	(2) FEDERAL STOCK NUMBER	(3) DESCRIPTION REFERENCE NUMBER & MFR. CODE / USABLE ON CODE	(4) UNIT OF MEAS	(5) QTY INC IN UNIT	(6) 30-DAY DS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(7) 30-DAY GS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(8) 1 YR ALW PER 100 EQUIP CNTGCY	(9) DEPOT MAINT ALW PER 100 EQUIP	(10) ILLUSTRATIONS (a) FIG NO.	(b) ITEM NO. OR REFERENCE DESIGNATION
P--H	5905-755-8389	....RESISTOR, FIXED, COMPOSITION: RC07GF220J (81349)	EA	1				*	2	2	12	5	33	A3A6A2R104
P--H	5905-726-6433	....RESISTOR, FIXED, COMPOSITION: RC07GF222K (81349)	EA	3				REF	REF	REF	REF	REF	33	A3A6A2R132
P--H	5905-726-6433	....RESISTOR, FIXED, COMPOSITION: RC07GF222K (81349)	EA	REF				REF	REF	REF	REF	REF	33	A3A6A2R133
P--H	5905-726-6433	....RESISTOR, FIXED, COMPOSITION: RC07GF222K (81349)	EA	REF				REF	REF	REF	REF	REF	33	A3A6A2R134
P--H	5905-686-4527	....RESISTOR, FIXED, COMPOSITION: RC07GF272K (81349)	EA	1				REF	REF	REF	REF	REF	33	A3A6A2R101
P--H	5905-682-4222	....RESISTOR, FIXED, COMPOSITION: RC07GF393K (81349)	EA	1				*	2	2	12	5	33	A3A6A2R130
P--H	5905-752-3340	....RESISTOR, FIXED, COMPOSITION: RC07GF472K (81349)	EA	2				2	2	2	33	20	33	A3A6A2R102
P--H	5905-752-3340	....RESISTOR, FIXED, COMPOSITION: RC07GF472K (81349)	EA	REF				REF	REF	REF	REF	REF	33	A3A6A2R105
P--H	5905-726-6441	....RESISTOR, FIXED, COMPOSITION: RC07GF561K (81349)	EA	2				REF	REF	REF	REF	REF	33	A3A6A2R126
P--H	5905-726-6441	....RESISTOR, FIXED, COMPOSITION: RC07GF561K (81349)	EA	REF				REF	REF	REF	REF	REF	33	A3A6A2R128
P--H	5905-686-9997	....RESISTOR, FIXED, COMPOSITION: RC07GF682J (81349)	EA	2				REF	REF	REF	REF	REF	33	A3A6A2R103
P--H	5905-686-9997	....RESISTOR, FIXED, COMPOSITION: RC07GF682J (81349)	EA	REF				REF	REF	REF	REF	REF	33	A3A6A2R127
P--H	5905-755-0796	....RESISTOR, FIXED, COMPOSITION: RC07GF821K (81349)	EA	1				*	2	2	12	5	33	A3A6A2R123
P--H	5905-834-9874	....RESISTOR, FIXED, COMPOSITION: RC07GF822K (81349)	EA	1				REF	REF	REF	REF	REF	33	A3A6A2R129
P--H	5905-192-3972	....RESISTOR, FIXED, COMPOSITION: RC20GF391K (81349)	EA	1				REF	REF	REF	REF	REF	33	A3A6A2R124
P--H	5961-752-6121	....SEMICONDUCTOR, DIODE: 1N753A (81349)	EA	1				REF	REF	REF	REF	REF	33	A3A6A2CR101
P--H	5961-833-3043	....SEMICONDUCTOR, DIODE: 1N757A (81349)	EA	2				*	2	2	13	6	33	A3A6A2CR105
P--H	5961-833-3043	....SEMICONDUCTOR, DIODE: 1N757A (81349)	EA	REF				REF	REF	REF	REF	REF	33	A3A6A2CR106
P--H	5961-842-9864	....SEMICONDUCTOR, DIODE: 1N914 (81349)	EA	1				*	*	2	8	3	33	A3A6A2CR108
P--H	5961-851-8296	....SEMICONDUCTOR, DIODE: 1N967B (81349)	EA	1				REF	REF	REF	REF	REF	33	A3A6A2CR104
P--H	5961-686-8578	....TRANSISTOR: 2N338 (81349)	EA	4				REF	REF	REF	REF	REF	33	A3A6A2Q101
P--H	5961-686-8578	....TRANSISTOR: 2N338 (81349)	EA	REF				REF	REF	REF	REF	REF	33	A3A6A2Q105
P--H	5961-686-8578	....TRANSISTOR: 2N338 (81349)	EA	REF				REF	REF	REF	REF	REF	33	A3A6A2Q106
P--H	5961-686-8578	....TRANSISTOR: 2N338 (81349)	EA	REF				REF	REF	REF	REF	REF	33	A3A6A2Q107
P--D	5821-226-4197	...PC BOARD ASSEMBLY, SELECT CALL: SMD549697 (70117)	EA	1								2	33	A3A6A3

(1) SMR CODE	(2) FEDERAL STOCK NUMBER	(3) DESCRIPTION REFERENCE NUMBER & MFR. CODE / USABLE ON CODE	(4) UNIT OF MEAS	(5) QTY INC IN UNIT	(6) 30-DAY DS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(7) 30-DAY GS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(8) 1 YR ALW PER 100 EQUIP CNTGCY	(9) DEPOT MAINT ALW PER 100 EQUIP	(10) ILLUSTRATIONS (a) FIG NO.	(b) ITEM NO. OR REFERENCE DESIGNATION
P--H		...SCREW, MACHINE: SMB550157-2 (70117)	EA	4				REF	REF	REF	REF	REF	33	A3A6A3H4
X1-H		....BOARD, PC: SMD550291 (70117)	EA	1										A3A6A3E1
P--H	5910-889-4503	....CAPACITOR, FIXED, ELECTROLYTIC: CS13AE100M (81349)	EA	1				REF	REF	REF	REF	REF	33	A3A6A3C109
P--H	5910-989-9695	....CAPACITOR, FIXED, ELECTROLYTIC: CS13AE2R2M (81349)	EA	2				REF	REF	REF	REF	REF	33	A3A6A3C108
P--H	5910-989-9695	....CAPACITOR, FIXED, ELECTROLYTIC: CS13AE2R2M (81349)	EA	REF				REF	REF	REF	REF	REF	33	A3A6A3C110
P--H	5910-823-1347	....CAPACITOR, FIXED, ELECTROLYTIC: CS13AF010M (81349)	EA	2				REF	REF	REF	REF	REF	33	A3A6A3C103
P--H	5910-823-1347	....CAPACITOR, FIXED, ELECTROLYTIC: CS13AF010M (81349)	EA	REF				REF	REF	REF	REF	REF	33	A3A6A3C105
P--H	5910-999-9752	....CAPACITOR, FIXED, PLASTIC: TWPC2A1-1PCT (93790)	EA	1				*	2	2	12	5	33	A3A6A3C106
X1-H		....CAPACITOR, FIXED, PLASTIC: TWPC2P22-1PCT (93790)	EA	1									33	A3A6A3C107
MD-H		....INSULATOR, DISK: SMB550063 (70117)	EA	3									33	A3A6A3E2
P--H	5905-979-3856	....RESISTOR, VARIABLE: CT200-00-2K (75042)	EA	3				2	2	2	46	30	33	A3A6A3R108
P--H	5905-979-3856	....RESISTOR, VARIABLE: CT200-00-2K (75042)	EA	REF				REF	REF	REF	REF	REF	33	A3A6A3R110
P--H	5905-979-3856	....RESISTOR, VARIABLE: CT200-00-2K (75042)	EA	REF				REF	REF	REF	REF	REF	33	A3A6A3R112
	5310-271-4640	....NUT, PLAIN, HEXAGON: MS35649-24 (96906)	EA	2				REF	REF	REF	REF	REF	33	A3A6A3R112H2
	5305-054-5643	....SCREW, MACHINE: MS51957-9 (96906)	EA	2				*	*	*	*	*	33	A3A6A3R112H2
P--H	5905-683-2238	....RESISTOR, FIXED, COMPOSITION: RC07GF103J (81349)	EA	1				REF	REF	REF	REF	REF	33	A3A6A3R116
P--H	5905-752-3336	....RESISTOR, FIXED, COMPOSITION: RC07GF151K (81349)	EA	1				REF	REF	REF	REF	REF	33	A3A6A3R120
P--H	5905-726-6433	....RESISTOR, FIXED, COMPOSITION: RC07GF222K (81349)	EA	3				REF	REF	REF	REF	REF	33	A3A6A3R118
P--H	5905-726-6433	....RESISTOR, FIXED, COMPOSITION: RC07GF222K (81349)	EA	REF				REF	REF	REF	REF	REF	33	A3A6A3R119
P--H	5905-726-6433	....RESISTOR, FIXED, COMPOSITION: RC07GF222K (81349)	EA	REF				REF	REF	REF	REF	REF	33	A3A6A3R121
P--H	5905-686-4527	....RESISTOR, FIXED, COMPOSITION: RC07GF272K (81349)	EA	1				REF	REF	REF	REF	REF	33	A3A6A3R122
P--H	5905-686-4528	....RESISTOR, FIXED, COMPOSITION: RC07GF332K (81349)	EA	1				REF	REF	REF	REF	REF	33	A3A6A3R117
P--H	5905-682-4098	....RESISTOR, FIXED, COMPOSITION: RC07GF392K (81349)	EA	1				REF	REF	REF	REF	REF	33	A3A6A3R114
P--H	5905-686-9997	....RESISTOR, FIXED, COMPOSITION: RC07GF682J (81349)	EA	2				REF	REF	REF	REF	REF	33	A3A6A3R115
P--H	5905-686-9997	....RESISTOR, FIXED, COMPOSITION: RC07GF682J (81349)	EA	REF				REF	REF	REF	REF	REF	33	A3A6A3R135

(1) SMR CODE	(2) FEDERAL STOCK NUMBER	(3) DESCRIPTION REFERENCE NUMBER & MFR. CODE / USABLE ON CODE	(4) UNIT OF MEAS	(5) QTY INC IN UNIT	(6) 30-DAY DS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(7) 30-DAY GS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(8) 1 YR ALW PER 100 EQUIP CNTGCY	(9) DEPOT MAINT ALW PER 100 EQUIP	(10) ILLUSTRATIONS (a) FIG NO.	(b) ITEM NO. OR REFERENCE DESIGNATION
P--H	5905-952-2144	....RESISTOR, FIXED, FILM: RN60D1781F (81349)	EA	1				*	2	2	12	5	33	A3A6A3R107
P--H	5905-993-6001	....RESISTOR, FIXED, FILM: RN60D3161F (81349)	EA	1				*	2	2	12	5	33	A3A6A3R111
P--H	5905-779-8378	....RESISTOR, FIXED, FILM: RN60D4871F (81349)	EA	1				*	2	2	12	5	33	A3A6A3R113
P--H	5905-985-5466	....RESISTOR, FIXED, FILM: RN60D6811F (81349)	EA	1				*	2	2	12	5	33	A3A6A3R106
P--H	5905-781-4857	....RESISTOR, FIXED, FILM: RN60D9531F (81349)	EA	1				*	2	2	12	5	33	A3A6A3R109
P--H	5960-615-0095	....SEMICONDUCTOR, DIODE: 1N276 (81349)	EA	3				REF	REF	REF	REF	REF	33	A3A6A3CR102
P--H	5960-615-0095	....SEMICONDUCTOR, DIODE: 1N276 (81349)	EA	REF				REF	REF	REF	REF	REF	33	A3A6A3CR103
P--H	5960-615-0095	....SEMICONDUCTOR, DIODE: 1N276 (81349)	EA	REF				REF	REF	REF	REF	REF	33	A3A6A3CR107
P--H	5961-686-8578	....TRANSISTOR: 2N338 (81349)	EA	3				REF	REF	REF	REF	REF	33	A3A6A3Q102
P--H	5961-686-8578	....TRANSISTOR: 2N338 (81349)	EA	REF				REF	REF	REF	REF	REF	33	A3A6A3Q103
P--H	5961-686-8578	....TRANSISTOR: 2N338 (81349)	EA	REF				REF	REF	REF	REF	REF	33	A3A6A3Q104
MD-H		...PIN, GUIDE: SMB549783 (70117)	EA	2									33	A3A6MP1
P--H	5305-676-8108	...SCREW, SHOULDER: SMC549792-1 (70117)	EA	2				*	2	2	27	15	33	A3A6H1
P--H	5940-644-8722	...TERMINAL, LUG: 4007-4 (77147)	EA	1				REF	REF	REF	REF	REF	33	A3A6E1
PH-F-S	5821-437-2351	..HOMER ASSEMBLY: SMD549682 (70117)	EA	1				*	*	*	5	2	3	A3A7
MD-H		...BRACKET, ANGLE: SMC549751 (70117)	EA	1									35	A3A7MP1
	5310-271-4640	...NUT, PLAIN, HEXAGON: MS35649-24 (96906)	EA	2				REF	REF	REF	REF	REF	34	A3A7MP1H2
	5305-763-3356	...SCREW, MACHINE: MS51959-5 (96906)	EA	2				REF	REF	REF	REF	REF	34	A3A7MP1H2
P--H	5935-811-1382	...CONNECTOR, RECEPTACLE: DBM13W3P (91146)	EA	1				*	2	2	19	10	34	A3A7P201
	5310-285-7085	...NUT, PLAIN, HEXAGON: MS20365-440A (96906)	EA	2				REF	REF	REF	REF	REF	35	A3A7P201H2
	5305-770-2579	...SCREW, MACHINE: MS51959-15 (96906)	EA	2				REF	REF	REF	REF	REF	34	A3A7P201H2
P--H	5935-941-9642	...CONNECTOR, RECEPTACLE: DM53740-5035 (71468)	EA	3				2	2	2	83	60	34	A3A7P203
P--H	5935-941-9642	...CONNECTOR, RECEPTACLE: DM53740-5035 (71468)	EA	REF				REF	REF	REF	REF	REF	34	A3A7P204
P--H	5935-941-9642	...CONNECTOR, RECEPTACLE: DM53740-5035 (71468)	EA	REF				REF	REF	REF	REF	REF	34	A3A7P205
P--H	5935-973-0558	...CONNECTOR, RECEPTACLE: 31-50 (98278)	EA	1				REF	REF	REF	REF	REF	34	A3A7J205

(1) SMR CODE	(2) FEDERAL STOCK NUMBER	(3) DESCRIPTION REFERENCE NUMBER & MFR. CODE / USABLE ON CODE	(4) UNIT OF MEAS	(5) QTY INC IN UNIT	(6) 30-DAY DS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(7) 30-DAY GS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(8) 1 YR ALW PER 100 EQUIP CNTGCY	(9) DEPOT MAINT ALW PER 100 EQUIP	(10) ILLUSTRATIONS (a) FIG NO.	(b) ITEM NO. OR REFERENCE DESIGNATION
P--H	5935-963-1432	...CONNECTOR, RECEPTACLE: 3242 (98278)	EA	1				REF	REF	REF	REF	REF	35	A3A7P202
X1-H		...CHASSIS: SMD549933 (70117)	EA	1										A3A7A1
X1-H		....CHASSIS: SMD549933-1 (70117)	EA	1										A3A7A1MP1
P--H	5935-615-8555	....JACK, TIP: SKT5BCWHITE (98291)	EA	4				REF	REF	REF	REF	REF	34	A3A7A1J201
P--H	5935-615-8555	....JACK, TIP: SKT5BCWHITE (98291)	EA	REF				REF	REF	REF	REF	REF	34	A3A7A1J202
P--H	5935-615-8555	....JACK, TIP: SKT5BCWHITE (98291)	EA	REF				REF	REF	REF	REF	REF	34	A3A7A1J203
P--H	5935-615-8555	....JACK, TIP: SKT5BCWHITE (98291)	EA	REF				REF	REF	REF	REF	REF	34	A3A7A1J204
P--D	5821-226-4196	...PC BOARD ASSEMBLY, HOMER: SMD549692 (70117)	EA	1								2	34	A3A7A2
P--H		...SCREW, MACHINE: SMB550157-2 (70117)	EA	4				REF	REF	REF	REF	REF	34	A3A7A2H4
X1-H		....BOARD, PC: SMD550305 (70117)	EA	1										A3A7A2E1
P--H	5910-811-4783	....CAPACITOR, FIXED, CERAMIC: CK06CW222M (81349)	EA	4				REF	REF	REF	REF	REF	34	A3A7A2C202
P--H	5910-811-4783	....CAPACITOR, FIXED, CERAMIC: CK06CW222M (81349)	EA	REF				REF	REF	REF	REF	REF	34	A3A7A2C203
P--H	5910-811-4783	....CAPACITOR, FIXED, CERAMIC: CK06CW222M (81349)	EA	REF				REF	REF	REF	REF	REF	34	A3A7A2C204
P--H	5910-811-4783	....CAPACITOR, FIXED, CERAMIC: CK06CW222M (81349)	EA	REF				REF	REF	REF	REF	REF	34	A3A7A2C205
P--H	5910-939-7510	....CAPACITOR, FIXED, CERAMIC: CK15AX223M (81349)	EA	1				REF	REF	REF	REF	REF	34	A3A7A2C221
P--H	5910-087-8958	....CAPACITOR, FIXED, ELECTROLYTIC: CS13AFR33M (81349)	EA	1				*	2	2	19	10	34	A3A7A2C217
P--H	5945-226-4180	....CHOPPER, ELECTRICAL: 2510-37 (81541)	EA	1				*	*	*	5	2	34	A3A7A2K201
	5310-271-4642	....NUT, PLAIN, HEXAGON: MS35649-44 (96906)	EA	4				REF	REF	REF	REF	REF	34	A3A7A2K201H4
P--H		....SCREW, MACHINE: SMB550157-2 (70117)	EA	4				REF	REF	REF	RREF	REF	35	A3A7A2K201H4
P--H	5950-086-2934	....COIL, RF: MS16225-16 (96906)	EA	4				REF	REF	REF	REF	REF	35	A3A7A2L201
P--H	5950-086-2934	....COIL, RF: MS16225-16 (96906)	EA	REF				REF	REF	REF	REF	REF	35	A3A7A2L202
P--H	5950-086-2934	....COIL, RF: MS16225-16 (96906)	EA	REF				REF	REF	REF	REF	REF	35	A3A7A2L203
P--H	5950-086-2934	....COIL, RF: MS16225-16 (96906)	EA	REF				REF	REF	REF	REF	REF	35	A3A7A2L206
MD-H		....INSULATOR, DISK: SMB550063 (70117)	EA	2									35	A3A7A2E2
P--H	5985-879-8220	....RELAY, ARMATURE: SMC550057 (70117)	EA	1				*	2	2	16	8	34	A3A7A2K202

(1) SMR CODE	(2) FEDERAL STOCK NUMBER	(3) DESCRIPTION REFERENCE NUMBER & MFR. CODE	USABLE ON CODE	(4) UNIT OF MEAS	(5) QTY INC IN UNIT	(6) 30-DAY DS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(7) 30-DAY GS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(8) 1 YR ALW PER 100 EQUIP CNTGCY	(9) DEPOT MAINT ALW PER 100 EQUIP	(10) ILLUSTRATIONS (a) FIG NO.	(b) ITEM NO. OR REFERENCE DESIGNATION
P--H		....SCREW, MACHINE: SMB550157-1 (70117)		EA	2				*	2	2	27	15	34	A3A7A2K202H2
P--H	5905-728-6153	....RESISTOR, FIXED, COMPOSITION: RC07GF333J (81349)		EA	1				REF	REF	REF	REF	REF	35	A3A7A2R230
P--H	5905-752-3338	....RESISTOR, FIXED, COMPOSITION: RC07GF102K (81349)		EA	1				REF	REF	REF	REF	REF	35	A3A7A2R213
P--H	5905-726-5344	....RESISTOR, FIXED, COMPOSITION: RC07GF153K (81349)		EA	1				REF	REF	REF	REF	REF	35	A3A7A2R209
P--H	5905-810-8135	....RESISTOR, FIXED, COMPOSITION: RC07GF181K (81349)		EA	1				*	2	2	12	5	35	A3A7A2R206
P--H	5905-726-5346	....RESISTOR, FIXED, COMPOSITION: RC07GF182K (81349)		EA	1				REF	REF	REF	REF	REF	35	A3A7A2R210
P--H	5905-726-6433	....RESISTOR, FIXED, COMPOSITION: RC07GF222K (81349)		EA	1				REF	REF	REF	REF	REF	35	A3A7A2R208
P--H	5905-802-6730	....RESISTOR, FIXED, COMPOSITION: RC07GF470J (81349)		EA	1				REF	REF	REF	REF	REF	35	A3A7A2R207
P--H	5905-080-5899	....RESISTOR, FIXED, WIREWOUND: RW69V101 (81349)		EA	1				*	2	2	19	10	35	A3A7A2R229
X1-H		....RESISTOR, VARIABLE: CT200-00-10K (75042)		EA	1									35	A3A7A2R211
	5310-271-4640	....NUT, PLAIN, HEXAGON: MS35649-24 (96906)		EA	2				REF	REF	REF	REF	REF	34	A3A7A2R211H2
	5305-054-5639	....SCREW, MACHINE: MS51957-5 (96906)		EA	2				*	*	*	*	*	35	A3A7A2R211H2
P--H	5960-556-2091	....SEMICONDUCTOR, DIODE: 1N270 (81349)		EA	4				2	2	2	33	20	35	A3A7A2CR201
P--H	5960-556-2091	....SEMICONDUCTOR, DIODE: 1N270 (81349)		EA	REF				REF	REF	REF	REF	REF	35	A3A7A2CR202
P--H	5960-556-2091	....SEMICONDUCTOR, DIODE: 1N270 (81349)		EA	REF				REF	REF	REF	REF	REF	35	A3A7A2CR203
P--H	5960-556-2091	....SEMICONDUCTOR, DIODE: 1N270 (81349)		EA	REF				REF	REF	REF	REF	REF	35	A3A7A2CR210
P--H	5960-615-0095	....SEMICONDUCTOR, DIODE: 1N276 (81349)		EA	2				REF	REF	REF	REF	REF	35	A3A7A2CR204
P--H	5960-615-0095	....SEMICONDUCTOR, DIODE: 1N276 (81349)		EA	REF				REF	REF	REF	REF	REF	35	A3A7A2CR211
P--H	5961-851-8296	....SEMICONDUCTOR, DIODE: 1N967B (81349)		EA	1				REF	REF	REF	REF	REF	35	A3A7A2CR207
P--H	5961-686-8578	....TRANSISTOR: 2N338 (81349)		EA	2				REF	REF	REF	REF	REF	34	A3A7A2Q203
P--H	5961-686-8578	....TRANSISTOR: 2N338 (81349)		EA	REF				REF	REF	REF	REF	REF	34	A3A7A2Q205
P--D	5821-226-4264	...PC BOARD ASSEMBLY, HOMER: SMD550116 (70117)		EA	1								2	34	A3A7A3
P--H		...SCREW, MACHINE: SMB550157-2 (70117)		EA	4				REF	REF	REF	REF	REF	34	A3A7A3H4
X1-H		....BOARD, PC: SMB550306 (70117)		EA	1										A3A7A3E1
P--H	5910-881-8946	....CAPACITOR, FIXED, CERAMIC: CK06CW472M (81349)		EA	1				2	2	2	40	25	34	A3A7A3C206

(1) SMR CODE	(2) FEDERAL STOCK NUMBER	(3) DESCRIPTION REFERENCE NUMBER & MFR. CODE / USABLE ON CODE	(4) UNIT OF MEAS	(5) QTY INC IN UNIT	(6) 30-DAY DS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(7) 30-DAY GS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(8) 1 YR ALW PER 100 EQUIP CNTGCY	(9) DEPOT MAINT ALW PER 100 EQUIP	(10) ILLUSTRATIONS (a) FIG NO.	(b) ITEM NO. OR REFERENCE DESIGNATION
P--H	5910-939-7510	....CAPACITOR, FIXED, CERAMIC: CK15AX223M (81349)	EA	3				REF	REF	REF	REF	REF	34	A3A7A3C209
P--H	5910-939-7510	....CAPACITOR, FIXED, CERAMIC: CK15AX223M (81349)	EA	REF				REF	REF	REF	REF	REF	34	A3A7A3C210
P--H	5910-939-7510	....CAPACITOR, FIXED, CERAMIC: CK15AX223M (81349)	EA	REF				REF	REF	REF	REF	REF	34	A3A7A3C215
P--H	5910-689-8750	....CAPACITOR, FIXED, CERAMIC: CK17AX104M (81349)	EA	1				*	2	2	12	5	34	A3A7A3C213
X1-H		....CAPACITOR, FIXED, CERAMIC: 8121-033R3A0131K (81349)	EA	1									34	A3A7A3C220
X1-H		....CAPACITOR, FIXED, CERAMIC: 8141-031P3K0511K (72982)	EA	1									34	A3A7A3C219
P--H	5910-892-7831	....CAPACITOR, FIXED, ELECTROLYTIC: CS13AB560K (81349)	EA	4				2	2	2	59	40	34	A3A7A3C201
P--H	5910-892-7831	....CAPACITOR, FIXED, ELECTROLYTIC: CS13AB560K (81349)	EA	REF				REF	REF	REF	REF	REF	34	A3A7A3C214
P--H	5910-892-7831	....CAPACITOR, FIXED, ELECTROLYTIC: CS13AB560K (81349)	EA	REF				REF	REF	REF	REF	REF	34	A3A7A3C216
P--H	5910-892-7831	....CAPACITOR, FIXED, ELECTROLYTIC: CS13AB560K (81349)	EA	REF				REF	REF	REF	REF	REF	34	A3A7A3C218
P--H	5910-957-8583	....CAPACITOR, FIXED, MICA: CM06F152J03 (81349)	EA	1				*	2	2	12	5	34	A3A7A3C207
P--H	5910-717-5853	....CAPACITOR, FIXED, MICA: CM06F182J03 (81349)	EA	1				REF	REF	REF	REF	REF	34	A3A7A3C208
P--H	5910-060-1191	....CAPACITOR, FIXED, MICA: CM06F392J03 (81349)	EA	1				*	2	2	12	5	34	A3A7A3C211
P--H	5910-060-1190	....CAPACITOR, FIXED, MICA: CM06F681J03 (81349)	EA	1				*	2	2	12	5	34	A3A7A3C212
P--H	5950-890-9757	....COIL, RF: DSH1001-1 (99800)	EA	2				*	2	2	27	15	35	A3A7A3L204
P--H	5950-890-9757	....COIL, RF: DSH1001-1 (99800)	EA	REF				REF	REF	REF	REF	REF	35	A3A7A3L205
MD-H		....INSULATOR, DISK: SMB550063 (70117)	EA	3									35	A3A7A3E2
P--H	5905-726-5340	....RESISTOR, FIXED, COMPOSITION: RC07GF101K (81349)	EA	1				REF	REF	REF	REF	REF	35	A3A7A3R203
P--H	5905-752-3338	....RESISTOR, FIXED, COMPOSITION: RC07GF102K (81349)	EA	1				REF	REF	REF	REF	REF	35	A3A7A3R217
P--H	5905-816-8554	....RESISTOR, FIXED, COMPOSITION: RC07GF103K (81349)	EA	4				REF	REF	REF	REF	REF	35	A3A7A3R204
P--H	5905-816-8554	....RESISTOR, FIXED, COMPOSITION: RC07GF103K (81349)	EA	REF				REF	REF	REF	REF	REF	35	A3A7A3R212
P--H	5905-816-8554	....RESISTOR, FIXED, COMPOSITION: RC07GF103K (81349)	EA	REF				REF	REF	REF	REF	REF	35	A3A7A3R215
P--H	5905-816-8554	....RESISTOR, FIXED, COMPOSITION: RC07GF103K (81349)	EA	REF				REF	REF	REF	REF	REF	35	A3A7A3R221
P--H	5905-726-5343	....RESISTOR, FIXED, COMPOSITION: RC07GF152K (81349)	EA	2				REF	REF	REF	REF	REF	35	A3A7A3R218
P--H	5905-726-5343	....RESISTOR, FIXED, COMPOSITION: RC07GF152K (81349)	EA	REF				REF	REF	REF	REF	REF	35	A3A7A3R225

(1) SMR CODE	(2) FEDERAL STOCK NUMBER	(3) DESCRIPTION REFERENCE NUMBER & MFR. CODE / USABLE ON CODE	(4) UNIT OF MEAS	(5) QTY INC IN UNIT	(6) 30-DAY DS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(7) 30-DAY GS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(8) 1 YR ALW PER 100 EQUIP CNTGCY	(9) DEPOT MAINT ALW PER 100 EQUIP	(10) ILLUSTRATIONS (a) FIG NO.	(b) ITEM NO. OR REFERENCE DESIGNATION
P--H	5905-726-6435	....RESISTOR, FIXED, COMPOSITION: RC07GF331K (81349)	EA	3				REF	REF	REF	REF	REF	35	A3A7A3R201
P--H	5905-726-6435	....RESISTOR, FIXED, COMPOSITION: RC07GF331K (81349)	EA	REF				REF	REF	REF	REF	REF	35	A3A7A3R202
P--H	5905-726-6435	....RESISTOR, FIXED, COMPOSITION: RC07GF331K (81349)	EA	REF				REF	REF	REF	REF	REF	35	A3A7A3R216
P--H	5905-726-6436	....RESISTOR, FIXED, COMPOSITION: RC07GF333K (81349)	EA	1				REF	REF	REF	REF	REF	35	A3A7A3R214
P--H	5905-682-4098	....RESISTOR, FIXED, COMPOSITION: RC07GF392K (81349)	EA	1				REF	REF	REF	REF	REF	35	A3A7A3R222
P--H	5905-752-3340	....RESISTOR, FIXED, COMPOSITION: RC07GF472K (81349)	EA	2				REF	REF	REF	REF	REF	35	A3A7A3R226
P--H	5905-752-3340	....RESISTOR, FIXED, COMPOSITION: RC07GF472K (81349)	EA	REF				REF	REF	REF	REF	REF	35	A3A7A3R228
P--H	5905-834-9874	....RESISTOR, FIXED, COMPOSITION: RC07GF822K (81349)	EA	1				REF	REF	REF	REF	REF	35	A3A7A3R219
P--H	5905-979-3856	....RESISTOR, VARIABLE: CT200-00-2K (75042)	EA	1				REF	REF	REF	REF	REF	35	A3A7A3R227
P--H	5905-890-9728	....RESISTOR, VARIABLE: CT200-00-500 (75042)	EA	1				*	2	2	16	8	35	A3A7A3R224
	5310-271-4640	....NUT, PLAIN, HEXAGON: MS35649-24 (96906)	EA	2				REF	REF	REF	REF	REF	35	A3A7A3R227H2
	5305-054-5642	....SCREW, MACHINE: MS51957-8 (96906)	EA	2				REF	REF	REF	REF	REF	34	A3A7A3R227H2
P--H	5960-556-2091	....SEMICONDUCTOR, DIODE: 1N270 (81349)	EA	2				REF	REF	REF	REF	REF	35	A3A7A3CR205
P--H	5960-556-2091	....SEMICONDUCTOR, DIODE: 1N270 (81349)	EA	REF				REF	REF	REF	REF	REF	35	A3A7A3CR206
P--H	5950-226-4255	....TRANSFORMER, AUDIO: SMC550072 (70117)	EA	1				*	*	2	8	3	34	A3A7A3T201
	5310-275-0889	....NUT, PLAIN, HEXAGON: 313-0132-00 (13499)	EA	4				REF	REF	REF	REF	REF	34	A3A7A3T201H4
P--H		....SCREW, MACHINE: SMB550157-3 (70117)	EA	4				*	2	2	46	30	35	A3A7A3T201H4
P--H		....WASHER, FLAT: SMB550172-2 (70117)	EA	4				REF	REF	REF	REF	REF	34	A3A7A3T201H4
P--H	5961-686-8578	....TRANSISTOR: 2N338 (81349)	EA	1				REF	REF	REF	REF	REF	34	A3A7A3Q204
P--H	5961-892-3473	....TRANSISTOR: 2N526 (81349)	EA	2				*	2	2	13	6	34	A3A7A3Q201
P--H	5961-892-3473	....TRANSISTOR: 2N526 (81349)	EA	REF				REF	REF	REF	REF	REF	34	A3A7A3Q206
P--H		...SCREW, SHOULDER: SMC549792-3 (70117)	EA	2				*	2	2	27	15	34	A3A7H1
P--H	5961-893-5938	...SEMICONDUCTOR, DIODE: 1N2982B (81349)	EA	1				*	*	2	8	3	35	A3A7CR208
P--H	5310-655-6930	...NUT, PLAIN, HEXAGON: MS25082-3 (96906)	EA	1				*	2	2	16	8	35	A3A7CR208H1
	5310-721-3261	...WASHER, FLAT: AN936A10B (88044)	EA	1				*	*	*	*	*	34	A3A7CR208H1

(1) SMR CODE	(2) FEDERAL STOCK NUMBER	(3) DESCRIPTION REFERENCE NUMBER & MFR. CODE / USABLE ON CODE	(4) UNIT OF MEAS	(5) QTY INC IN UNIT	(6) 30-DAY DS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(7) 30-DAY GS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(8) 1 YR ALW PER 100 EQUIP CNTGCY	(9) DEPOT MAINT ALW PER 100 EQUIP	(10) ILLUSTRATIONS (a) FIG NO.	(b) ITEM NO. OR REFERENCE DESIGNATION
P--H	5940-644-8722	...TERMINAL, LUG: 4007-4 (77147)	EA	1				REF	REF	REF	REF	REF	34	A3A7E1
P--H	5940-675-8124	...TERMINAL, LUG: 4041 (77147)	EA	1				*	2	2	19	10	34	A3A7E2
X1-H		..MAIN CHASSIS: SMB549876 (70117)	EA	1									3	A3A8
PH-F-S	5915-226-3398	...HARMONIC FILTER: SMD549683 (70117)	EA	1				*	*	*	5	2	38	A3A8A1
P--H		...SCREW, MACHINE: SMB550156-2 (70117)	EA	4				2	2	2	46	30	36	A3A8A1H4
P--H	5995-226-4204	....CABLE ASSEMBLY, RF: SMB549983 (70117)	EA	1				*	*	*	*	*	38	A3A8A1W1
X1-H		.....CONNECTOR, PLUG: L503 (94875)	EA	1									38	A3A8A1W1P1601
P--H	5995-226-4201	....CABLE ASSEMBLY, RF: SMB549985-7 (70117)	EA	1				*	*	*	*	*	38	A3A8A1W2
X1-H		.....CONNECTOR, PLUG: P1031 (94375)	EA	1									39	A3A8A1W2P1602
P--H	5910-811-4783	....CAPACITOR, FIXED, CERAMIC: CK06CW222M (81349)	EA	3				REF	REF	REF	REF	REF	39	A3A8A1C1629
P--H	5910-811-4783	....CAPACITOR, FIXED, CERAMIC: CK06CW222M (81349)	EA	REF				REF	REF	REF	REF	REF	39	A3A8A1C1630
P--H	5910-811-4783	....CAPACITOR, FIXED, CERAMIC: CK06CW222M (81349)	EA	REF				REF	REF	REF	REF	REF	39	A3A8A1C1631
P--H	5910-051-7305	....CAPACITOR, FIXED, GLASS: CY12C150G (81349)	EA	1				*	2	2	12	5	38	A3A8A1C1608
P--H	5910-060-9465	....CAPACITOR, FIXED, GLASS: CY12C240G (81349)	EA	2				*	2	2	19	10	38	A3A8A1C1604
P--H	5910-060-9465	....CAPACITOR, FIXED, GLASS: CY12C240G (81349)	EA	REF				REF	REF	REF	REF	REF	38	A3A8A1C1618
P--H	5910-062-3965	....CAPACITOR, FIXED, GLASS: CY12C3R9C (81349)	EA	1				*	2	2	12	5	38	A3A8A1C1602
P--H	5910-850-6216	....CAPACITOR, FIXED, GLASS: CY12C6R8C (81349)	EA	1				*	2	2	19	10	38	A3A8A1C1612
P--H	5910-957-2054	....CAPACITOR, FIXED, MICA: CM05E330G03 (81349)	EA	1				*	2	2	12	5	38	A3A8A1C1606
P--H	5910-068-1332	....CAPACITOR, FIXED, MICA: CM05E390G03 (81349)	EA	3				*	2	2	27	15	38	A3A8A1C1614
P--H	5910-068-1332	....CAPACITOR, FIXED, MICA: CM05E390G03 (81349)	EA	REF				REF	REF	REF	REF	REF	39	A3A8A1C1627
P--H	5910-068-1332	....CAPACITOR, FIXED, MICA: CM05E390G03 (81349)	EA	REF				REF	REF	REF	REF	REF	39	A3A8A1C1628
P--H	5910-952-7046	....CAPACITOR, FIXED, MICA: CM05E560G03 (81349)	EA	1				*	2	2	12	5	38	A3A8A1C1616
P--H	5910-964-6513	....CAPACITOR, FIXED, MICA: CM05E620J03 (81349)	EA	1				*	2	2	19	10	38	A3A8A1C1605
P--H	5910-051-4610	....CAPACITOR, FIXED, MICA: CM05E680J03 (81349)	EA	1				REF	REF	REF	REF	REF	38	A3A8A1C1607
P--H	5910-717-3555	....CAPACITOR, FIXED, MICA: CM05E750J03 (81349)	EA	1				*	2	2	12	5	38	A3A8A1C1603

(1) SMR CODE	(2) FEDERAL STOCK NUMBER	(3) DESCRIPTION REFERENCE NUMBER & MFR. CODE / USABLE ON CODE	(4) UNIT OF MEAS	(5) QTY INC IN UNIT	(6) 30-DAY DS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(7) 30-DAY GS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(8) 1 YR ALW PER 100 EQUIP CNTGCY	(9) DEPOT MAINT ALW PER 100 EQUIP	(10) ILLUSTRATIONS (a) FIG NO.	(b) ITEM NO. OR REFERENCE DESIGNATION
P--H	5910-781-6497	....CAPACITOR, FIXED, MICA: CM05E820J03 (81349)	EA	1				*	2	2	27	15	38	A3A8A1C1615
P--H	5910-825-3067	....CAPACITOR, FIXED, MICA: CM05F111J03 (81349)	EA	1				REF	REF	REF	REF	REF	38	A3A8A1C1613
P--H	5910-717-3541	....CAPACITOR, FIXED, MICA: CM05F910J03 (81349)	EA	1				*	2	2	12	5	38	A3A8A1C1617
X1-H		....CHASSIS: SMD550095 (70117)	EA	1										A3A8A1MP1
P--H	5950-922-8155	....COIL ASSEMBLY: SMB504306 (70117)	EA	1				*	2	2	16	8	39	A3A8A1L1610
P--H	5950-226-4156	....COIL, RF: SMC549844-1 (70117)	EA	2				*	2	2	27	15	38	A3A8A1L1602
P--H	5950-226-4156	....COIL, RF: SMC549844-1 (70117)	EA	REF				REF	REF	REF	REF	REF	38	A3A8A1L1603
P--H	5950-226-4155	....COIL, RF: SMC549844-2 (70117)	EA	1				*	2	2	16	8	38	A3A8A1L1604
P--H	5950-892-8242	....COIL, RF: SMC549844-3 (70117)	EA	1				*	2	2	16	8	38	A3A8A1L1607
P--H	5950-226-4215	....COIL, RF: SMC549844-4 (70117)	EA	2				*	2	2	27	15	38	A3A8A1L1601
P--H	5950-226-4215	....COIL, RF: SMC549844-4 (70117)	EA	REF				REF	REF	REF	REF	REF	38	A3A8A1L1608
P--H	5950-226-3386	....COIL, RF: SMC549844-5 (70117)	EA	1				*	2	2	16	8	38	A3A8A1L1606
P--H	5950-226-4216	....COIL, RF: SMC549844-6 (70117)	EA	1				*	2	2	16	8	38	A3A8A1L1605
P--H	5935-226-3406	....CONNECTOR, RECEPTACLE: GX6-20P (95238)	EA	1				REF	REF	REF	REF	REF	39	A3A8A1J1601
	5310-271-4640	....NUT, PLAIN, HEXAGON: MS35649-24 (96906)	EA	4				REF	REF	REF	REF	REF	38	A3A8A1J1601H4
	5305-054-5639	....SCREW, MACHINE: MS51957-5 (96906)	EA	2				REF	REF	REF	REF	REF	38	A3A8A1J1601H2
P--H		....WASHER, FLAT: .092 ID X .219 OD X .018 THK SMB550145 (70117)	EA	2				2	2	2	71	50	38	A3A8A1J1601H2
P--H		....GROMMET, RUBBER: SMB550073 (70117)	EA	1				*	2	2	19	10	38	A3A8A1H1
P--H	5325-286-6047	....GROMMET, RUBBER: 901 (75543)	EA	1				REF	REF	REF	REF	REF	38	A3A8A1H2
P--H	5935-073-3248	....HOLDER: SMB549884 (70117)	EA	1				REF	REF	REF	REF	REF	39	A3A8A1MP2
P--H		....SCREW, MACHINE:1-72 X 5/16 SLOT FIH SMB550148 (70117)	EA	2				*	2	2	27	15	39	A3A8A1MP2H2
P--D	5821-226-4274	....PC BOARD ASSEMBLY: SMD549698 (70117)	EA	1								2	38	A3A8A1A1
	5310-271-4640	....NUT, PLAIN, HEXAGON: MS35649-24 (96906)	EA	4				REF	REF	REF	REF	REF	38	A3A8A1A1H4
P--H		....WASHER, FLAT: SMB550145 (70117)	EA	4				REF	REF	REF	REF	REF	38	A3A8A1A1H4
X1-H		.....BOARD PC: SMD550303 (70117)	EA	1										A3A8A1A1E1

(1) SMR CODE	(2) FEDERAL STOCK NUMBER	(3) DESCRIPTION REFERENCE NUMBER & MFR. CODE / USABLE ON CODE	(4) UNIT OF MEAS	(5) QTY INC IN UNIT	(6) 30-DAY DS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(7) 30-DAY GS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(8) 1 YR ALW PER 100 EQUIP CNTGCY	(9) DEPOT MAINT ALW PER 100 EQUIP	(10) ILLUSTRATIONS (a) FIG NO.	(b) ITEM NO. OR REFERENCE DESIGNATION
P--H	5910-837-2577	.....CAPACITOR, FIXED, CERAMIC: CK60AW152M (81349)	EA	4				REF	REF	REF	REF	REF	38	A3A8A1A1C1620
P--H	5910-837-2577	.....CAPACITOR, FIXED, CERAMIC: CK60AW152M (81349)	EA	REF				REF	REF	REF	REF	REF	38	A3A8A1A1C1621
P--H	5910-837-2577	.....CAPACITOR, FIXED, CERAMIC: CK60AW152M (81349)	EA	REF				REF	REF	REF	REF	REF	38	A3A8A1A1C1623
P--H	5910-837-2577	.....CAPACITOR, FIXED, CERAMIC: CK60AW152M (81349)	EA	REF				REF	REF	REF	REF	REF	38	A3A8A1A1C1624
P--H	5910-823-1347	.....CAPACITOR, FIXED, ELECTROLYTIC: CS13AF010M (81349)	EA	1				REF	REF	REF	REF	REF	38	A3A8A1A1C1622
P--H	5910-781-6497	.....CAPACITOR, FIXED, MICA: CM05E820J03 (81349)	EA	2				REF	REF	REF	REF	REF	38	A3A8A1A1C1625
P--H	5910-781-6497	.....CAPACITOR, FIXED, MICA: CM05E820J03 (81349)	EA	REF				REF	REF	REF	REF	REF	38	A3A8A1A1C1626
P--H	5950-054-9131	.....COIL, RF: MS75008-35 (96906)	EA	1				REF	REF	REF	REF	REF	38	A3A8A1A1L1609
P--H	5905-687-0000	.....RESISTOR, FIXED, COMPOSITION: RC07GF183J (81349)	EA	1				REF	REF	REF	REF	REF	38	A3A8A1A1R1607
P--H	5905-808-6135	.....RESISTOR, FIXED, COMPOSITION: RC07GF270J (81349)	EA	2				REF	REF	REF	REF	REF	38	A3A8A1A1R1603
P--H	5905-808-6135	.....RESISTOR, FIXED, COMPOSITION: RC07GF270J (81349)	EA	REF				REF	REF	REF	REF	REF	38	A3A8A1A1R1606
P--H	5905-834-9874	.....RESISTOR, FIXED, COMPOSITION: RC07GF822K (81349)	EA	2				REF	REF	REF	REF	REF	38	A3A8A1A1R1604
P--H	5905-834-9874	.....RESISTOR, FIXED, COMPOSITION: RC07GF822K (81349)	EA	REF				REF	REF	REF	REF	REF	38	A3A8A1A1R1605
P--H	5960-615-0095	.....SEMICONDUCTOR, DIODE: 1N276 (81349)	EA	4				REF	REF	REF	REF	REF	38	A3A8A1A1CR1601
P--H	5960-615-0095	.....SEMICONDUCTOR, DIODE: 1N276 (81349)	EA	REF				REF	REF	REF	REF	REF	38	A3A8A1A1CR1602
P--H	5960-615-0095	.....SEMICONDUCTOR, DIODE: 1N276 (81349)	EA	REF				REF	REF	REF	REF	REF	38	A3A8A1A1CR1603
P--H	5960-615-0095	.....SEMICONDUCTOR, DIODE: 1N276 (81349)	EA	REF				REF	REF	REF	REF	REF	38	A3A8A1A1CR1604
P--D	5821-226-4273	....PC BOARD ASSEMBLY: SMD550129 (70117)	EA	1								2	38	A3A8A1A2
	5305-054-5637	....SCREW, MACHINE: MS51957-3 (96906)	EA	13				REF	REF	REF	REF	REF	38	A3A8A1A2H13
X1-H		.....BOARD, PC: SMD550302 (70117)	EA	1										A3A8A1A2E1
P--H	5910-850-6216	.....CAPACITOR, FIXED, GLASS: CY12C6R8C (81349)	EA	1				REF	REF	REF	REF	REF	38	A3A8A1A2C1610
P--H	5910-958-4175	.....CAPACITOR, FIXED, MICA: CM05E430J03 (81349)	EA	1				*	2	2	12	5	38	A3A8A1A2C1609
P--H	5910-964-6506	.....CAPACITOR, FIXED, MICA: CM05E510J03 (81349)	EA	2				*	2	2	19	10	38	A3A8A1A2C1601
P--H	5910-964-6506	.....CAPACITOR, FIXED, MICA: CM05E510J03 (81349)	EA	REF				REF	REF	REF	REF	REF	38	A3A8A1A2C1619
P--H	5910-964-6513	.....CAPACITOR, FIXED, MICA: CM05E620J03 (81349)	EA	1				REF	REF	REF	REF	REF	38	A3A8A1A2C1611

(1) SMR CODE	(2) FEDERAL STOCK NUMBER	(3) DESCRIPTION REFERENCE NUMBER & MFR. CODE / USABLE ON CODE	(4) UNIT OF MEAS	(5) QTY INC IN UNIT	(6) 30-DAY DS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(7) 30-DAY GS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(8) 1 YR ALW PER 100 EQUIP CNTGCY	(9) DEPOT MAINT ALW PER 100 EQUIP	(10) ILLUSTRATIONS (a) FIG NO.	(b) ITEM NO. OR REFERENCE DESIGNATION
MD-H		.....INSULATOR, PLATE: SMC549809 (70117)	EA	1									39	A3A8A1A2E2
P--H		.....NUT, SLEEVE: SMB549774 (70117)	EA	4				2	2	2	33	20	39	A3A8A1A2E2H4
	5305-054-5642	.....SCREW, MACHINE: MS51957-8 (96906)	EA	4				REF	REF	REF	REF	REF	39	A3A8A1A2E2H4
P--H	5905-682-4106	.....RESISTOR, FIXED, COMPOSITION: RC07GF560J (81349)	EA	2				*	2	2	19	10	39	A3A8A1A2R1601
P--H	5905-682-4106	.....RESISTOR, FIXED, COMPOSITION: RC07GF560J (81349)	EA	REF				REF	REF	REF	REF	REF	39	A3A8A1A2R1602
P--H	5985-226-3388	.....SWITCH, RF: SMC550053 (70117)	EA	2				2	2	2	33	20	38	A3A8A1A2K1601
P--H	5985-226-3388	.....SWITCH, RF: SMC550053 (70117)	EA	REF				REF	REF	REF	REF	REF	38	A3A8A1A2K1602
MD-H		....PLATE, COVER: SMC549853 (70117)	EA	1									38	A3A8A1MP3
	5305-054-5637	....SCREW, MACHINE: MS51957-3 (96906)	EA	12				REF	REF	REF	REF	REF	38	A3A8A1MP3H12
	5310-058-2950	....WASHER, LOCK: MS35337-77 (96906)	EA	12				REF	REF	REF	REF	REF	38	A3A8A1MP3H12
MD-H		....STRAP, RETAINING: SMB549775 (70117)	EA	2				REF	REF	REF	REF	REF	39	A3A8A1MP4
X1-H		...MAIN CHASSIS: SMD549925 (70117)	EA	1									36	A3A8A2
P--H	5935-902-4072	....ADAPTER, CONNECTOR: 53-358 (98278)	EA	2				*	2	2	16	8	37	A3A8A2CP1002
P--H	5935-902-4072	....ADAPTER, CONNECTOR: 53-358 (98278)	EA	REF				REF	REF	REF	REF	REF	37	A3A8A2CP1003
P--H	6625-226-7528	....AMMETER: MR05W100DCUA (81349)	EA	1				*	2	2	12	5	37	A3A8A2M1001
P--D		....CATCH: SMC549840 (70117)	EA	1								*	37	A3A8A2MP1
X1-H		....CHASSIS: SMD550140 (70117)	EA	1									37	A3A8A2A1
X1-H		.....BEARING, SLEEVE: SMB549786 (70117)	EA	2										A3A8A2A1MP1
X1-H		.....CHASSIS: SMD550140-1 (70117)	EA	1										A3A8A2A1MP2
X1-H		.....CLIP, SPRING TENSION: 6008-7A (91506)	EA	1										A3A8A2A1MP3
X1-H		.....RIVET, TUBULAR: R4008X5-32LG (12014)	EA	1										A3A8A2A1MP3H1
X1-H		.....INSERT, SCREW THREAD: MS21209-00815 (96906)	EA	19										A3A8A2A1H1
X1-H		.....INSERT, SCREW THREAD: MS21209C0415 (96906)	EA	8										A3A8A2A1H2
X1-H		.....RETAINER, STUD: 26R5-1 (71286)	EA	2										A3A8A2A1MP4
X1-H		.....RIVET, SOLID: MS20470AD3-4 (96906)	EA	4										A3A8A2A1MP4H4

(1) SMR CODE	(2) FEDERAL STOCK NUMBER	(3) DESCRIPTION REFERENCE NUMBER & MFR. CODE / USABLE ON CODE	(4) UNIT OF MEAS	(5) QTY INC IN UNIT	(6) 30-DAY DS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(7) 30-DAY GS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(8) 1 YR ALW PER 100 EQUIP CNTGCY	(9) DEPOT MAINT ALW PER 100 EQUIP	(10) ILLUSTRATIONS (a) FIG NO.	(b) ITEM NO. OR REFERENCE DESIGNATION
Xl-H		.....RIVET, SOLID: MS20426AD2-4 (96906)	EA	4										A3A8A2A1H3
Xl-H		.....SHELF: SMD549702 (70117)	EA	1										A3A8A2A1MP5
P--H	5340-548-0169	....CLAMP, RIM CLENCH: 109054-325 (06773)	EA	2				*	2	2	19	10	37	A3A8A2MP2
P--D		....CLIP ASSEMBLY, ELECTRICAL: SMC549916 (70117)	EA	1								*	37	A3A8A2A2
	5305-054-5647	....SCREW, MACHINE: MS51957-13 (96906)	EA	2				*	*	*	*	*	37	A3A8A2A2H2
P--H		....WASHER, FLAT: SMB550172-2 (70117)	EA	2				REF	REF	REF	REF	REF	37	A3A8A2A2H2
Xl		.....BOARD: SMC549916-1 (70117)	EA	1										A3A8A2A2E1
Xl		.....CLIP, ELECTRICAL: 4051 (71400)	EA	6										A3A8A2A2MP1
Xl		.....RIVET, SOLID: SMB550173 (70117)	EA	6										A3A8A2A2MP1H6
P--H	4140-226-4258	....FAN, VANE, AXIAL: V1H0E8-5C (19070)	EA	1				*	*	2	10	4	37	A3A8A2B1001
P--H	5915-226-3403	....FILTER, LOW PASS: SMC550055 (70117)	EA	1				*	*	*	5	2	37	A3A8A2FL1002
	5305-054-5647	....SCREW, MACHINE: MS51957-13 (96906)	EA	2				REF	REF	REF	REF	REF	37	A3A8A2FL1002H2
MD-H		....PLATE, NUT, ASSEMBLY: SMC549830 (70117)	EA	1									37	A3A8A2MP3
	5305-763-7822	....SCREW, MACHINE: MS51959-14 (96906)	EA	4				REF	REF	REF	REF	REF	37	A3A8A2MP3H4
P--H	5915-889-4979	....FILTER, RADIO: GF2311-1 (07294)	EA	1				*	*	*	5	2	37	A3A8A2FL1001
	5305-054-5647	....SCREW, MACHINE: MS51957-13 (96906)	EA	2				REF	REF	REF	REF	REF	37	A3A8A2FL1001H2
P--H	5325-185-0017	....GROMMET: MS35489-33 (96906)	EA	1				*	2	2	19	10	37	A3A8A2H1
P--H	5821-891-9427	....HANDLE ASSEMBLY: SMD549688 (70117)	EA	1				*	*	2	8	3	37	A3A8A2A3
P--H		....SCREW, MACHINE:10-32 X 19-32 SLOT FHSTL SMB549907 (70117)	EA	2				*	2	2	27	15	37	A3A8A2A3H2
Xl-H		.....HANDLE: SMD549688-2 (70117)	EA	1										A3A8A2A3MP1
Xl-H		.....LATCH: SMD549688-1 (70117)	EA	2										A3A8A2A3MP2
P--H	5315-844-5644	.....PIN, SPRING: MS16562-194 (96906)	EA	2				*	2	2	13	6	37	A3A8A2A3MP3
P--H	5330-691-0145	....PACKING, PREFORM: MS28775-022 (96906)	EA	2				*	2	2	16	8	37	A3A8A2MP4
MD-H		....PLATE: SMC549749 (70117)	EA	1									37	A3A8A2MP5
MD-H		....PLATE ASSEMBLY: SMC549860 (70117)	EA	1									37	A3A8A2MP6

(1) SMR CODE	(2) FEDERAL STOCK NUMBER	(3) DESCRIPTION REFERENCE NUMBER & MFR. CODE / USABLE ON CODE	(4) UNIT OF MEAS	(5) QTY INC IN UNIT	(6) 30-DAY DS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(7) 30-DAY GS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(8) 1 YR ALW PER 100 EQUIP CNTGCY	(9) DEPOT MAINT ALW PER 100 EQUIP	(10) ILLUSTRATIONS (a) FIG NO.	(b) ITEM NO. OR REFERENCE DESIGNATION
	5310-271-4642	....NUT, PLAIN, HEXAGON: MS35649-44 (96906)	EA	4				REF	REF	REF	REF	REF	37	A3A8A2MP6H4
	5305-763-3356	....SCREW, MACHINE: MS51959-5 (96906)	EA	4				REF	REF	REF	REF	REF	37	A3A8A2MP6H4
P--H	5945-854-8546	....RELAY, ARMATURE: 3SAF1241 (01526)	EA	1				REF	REF	REF	REF	REF	37	A3A8A2K1001
	5310-271-4642	....NUT, PLAIN, HEXAGON: MS35649-44 (96906)	EA	2				REF	REF	REF	REF	REF	37	A3A8A2K1001H2
P--H	5905-985-5685	....RESISTOR, VARIABLE: G5983 (01121)	EA	1				*	2	2	16	8	37	A3A8A2R1001
P--H		....NUT, PLAIN, HEXAGON: SMB550170 (70117)	EA	1				REF	REF	REF	REF	REF	37	A3A8A2R1001H1
	5310-543-2740	....WASHER, LOCK: MS35333-74 (96906)	EA	1				*	*	*	*	*	37	A3A8A2R1001H1
P--H	5905-843-6408	....RESISTOR, FIXED, WIREWOUND: RE65G1R00 (81349)	EA	1				*	2	2	19	10	37	A3A8A2R1007
P--H		....NUT, SELF-LOCKING: SMC504619 (70117)	EA	2				*	2	2	16	8	37	A3A8A2R1007H2
	5305-763-3357	....SCREW, MACHINE: MS51959-6 (96906)	EA	2				*	*	*	*	*	37	A3A8A2R1007H2
P--H	5961-226-7533	....SEMICONDUCTOR, DIODE: 1N1200R (80131)	EA	1				*	*	2	8	3	37	A3A8A2CR1002
	5310-934-9765	....NUT, PLAIN, HEXAGON: MS35650-304 (96906)	EA	1				*	*	*	*	*	37	A3A8A2CR1002H1
	5310-721-3343	....WASHER: AN936B10B (96906)	EA	1				REF	REF	REF	REF	REF	37	A3A8A2CR1002H1
P--H		....SPRING, HELICAL COMPRESSION: SMB549831-1 (70117)	EA	1				*	2	2	12	5	37	A3A8A2MP7
P--H	5930-973-1135	....SWITCH, PUSH: PM7 (70309)	EA	1				*	2	2	19	10	37	A3A8A2S1002
P--H	5930-897-2154	....SWITCH, PUSH: SMC549974 (70117)	EA	1				*	2	2	19	10	37	A3A8A2S1003
P--H	5985-226-3402	....SWITCH, RF: SMC550058 (70117)	EA	1				*	2	2	19	10	37	A3A8A2K1002
P--H		....SCREW, MACHINE: SMB550160 (70117)	EA	2				*	2	2	16	8	37	A3A8A2K1002H2
	5310-198-3614	....WASHER: MS35337-98 (96906)	EA	2				*	*	*	*	*	37	A3A8A2K1002H2
P--H	5940-539-0511	....TERMINAL, STUD: 1426A (88245)	EA	2				*	*	*	5	2	37	A3A8A2E1
P--H	5940-501-8634	....TERMINAL, LUG: 4021 (77147)	EA	1				REF	REF	REF	REF	REF	37	A3A8A2E2
P--H	5940-836-3536	....TERMINAL, LUG: 4040-2 HOTTINNED (77147)	EA	2				REF	REF	REF	REF	REF	37	A3A8A2E3
MD-H		....TERMINAL, STUD: 4873-1-0516 (71279)	EA	11									37	A3A8A2E4
	5305-764-2966	....SCREW, MACHINE MS51959-2 (96906)	EA	11				REF	REF	REF	REF	REF	37	A3A8A2E4H11
MD-H		....TERMINAL, STUD: 4878-1-0516 (71279)	EA	1									37	A3A8A2E5

(1) SMR CODE	(2) FEDERAL STOCK NUMBER	(3) DESCRIPTION REFERENCE NUMBER & MFR. CODE / USABLE ON CODE	(4) UNIT OF MEAS	(5) QTY INC IN UNIT	(6) 30-DAY DS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(7) 30-DAY GS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(8) 1 YR ALW PER 100 EQUIP CNTGCY	(9) DEPOT MAINT ALW PER 100 EQUIP	(10) ILLUSTRATIONS (a) FIG NO.	(b) ITEM NO. OR REFERENCE DESIGNATION
	5305-764-2966	....SCREW, MACHINE MS51959-2 (96906)	EA	1				REF	REF	REF	REF	REF	37	A3A8A2E5H1
	5310-543-2740	....WASHER, LOCK: MS35333-74 (96906)	EA	1				REF	REF	REF	REF	REF	37	A3A8A2H2
P--H	5995-226-4200	...CABLE ASSEMBLY, RF: SMB549985-9 (70117)	EA	1				*	*	*	*	*	36	A3A8W1
X1-H		....CONNECTOR, PLUG: P1031 (94375)	EA	1									36	A3A8W1P1006
P--H	5995-226-4202	...CABLE ASSEMBLY, RF: SMB549985-10 (70117)	EA	1				*	*	*	*	*	36	A3A8W2
X1-H		....CONNECTOR, PLUG: P1031 (94375)	EA	1									36	A3A8W2P1007
P--H	5995-226-4203	...CABLE ASSEMBLY, RF: SMB549988 (70117)	EA	1				*	*	*	*	*	36	A3A8W3
X1-H		....CONNECTOR, PLUG: L503 (94875)	EA	2									36	A3A8W3J1012
X1-H		....CONNECTOR, PLUG: L503 (94875)	EA	REF									36	A3A8W3J1015
X1-H		...CHASSIS SUBASSEMBLY: SME549912 (70117)	EA	1									36	A3A8A3
P--H	5910-881-8946	....CAPACITOR, FIXED, CERAMIC: CK06CW472M (81349)	EA	4				REF	REF	REF	REF	REF	36	A3A8A3C1002
P--H	5910-881-8946	....CAPACITOR, FIXED, CERAMIC: CK06CW472M (81349)	EA	REF				REF	REF	REF	REF	REF	36	A3A8A3C1003
P--H	5910-881-8946	....CAPACITOR, FIXED, CERAMIC: CK06CW472M (81349)	EA	REF				REF	REF	REF	REF	REF	36	A3A8A3C1004
P--H	5910-881-8946	....CAPACITOR, FIXED, CERAMIC: CK06CW472M (81349)	EA	REF				REF	REF	REF	REF	REF	36	A3A8A3C1005
P--H	5905-752-3338	....RESISTOR, FIXED, COMPOSITION: RC07GF102K (81349)	EA	1				REF	REF	REF	REF	REF	36	A3A8A3R1006
P--H	5905-726-6436	....RESISTOR, FIXED, COMPOSITION: RC07GF333K (81349)	EA	1				REF	REF	REF	REF	REF	36	A3A8A3R1004
P--H	5905-688-4447	....RESISTOR, FIXED, COMPOSITION: RC07GF473K (81349)	EA	1				REF	REF	REF	REF	REF	36	A3A8A3R1003
P--H	5905-681-8958	....RESISTOR, FIXED, COMPOSITION: RC07GF564J (81349)	EA	2				*	2	2	19	10	36	A3A8A3R1002
P--H	5905-681-8958	....RESISTOR, FIXED, COMPOSITION: RC07GF564J (81349)	EA	REF				REF	REF	REF	REF	REF	36	A3A8A3R1005
P--H	5960-615-0095	....SEMICONDUCTOR, DIODE: 1N276 (81349)	EA	1				REF	REF	REF	REF	REF	36	A3A8A3CR1001
P--H	5935-073-0308	...ADAPTER, CONNECTOR: 30-213 (98278)	EA	1				*	*	2	10	4	36	A3A8CP1001
P--H	5910-849-7568	...CAPACITOR, FIXED, PAPER: CP08A1KB474K3 (81349)	EA	1				*	2	2	19	10	36	A3A8C1001
P--H	5340-619-7754	...CLAMP, LOOP: HP3N (09922)	EA	2				*	2	2	19	10	36	A3A8MP1
	5310-271-4640	...NUT, PLAIN, HEXAGON: MS35649-24 (96906)	EA	2				REF	REF	REF	REF	REF	36	A3A8MP1H2
	5305-763-3356	...SCREW, MACHINE MS51959-5 (96906)	EA	2				REF	REF	REF	REF	REF	36	A3A8MP1H2

(1) SMR CODE	(2) FEDERAL STOCK NUMBER	(3) DESCRIPTION REFERENCE NUMBER & MFR. CODE / USABLE ON CODE	(4) UNIT OF MEAS	(5) QTY INC IN UNIT	(6) 30-DAY DS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(7) 30-DAY GS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(8) 1 YR ALW PER 100 EQUIP CNTGCY	(9) DEPOT MAINT ALW PER 100 EQUIP	(10) ILLUSTRATIONS (a) FIG NO.	(b) ITEM NO. OR REFERENCE DESIGNATION
P--H	5935-892-9431	...CONNECTOR, RECEPTACLE DAF15SC7F151 (91146)	EA	3				2	2	2	46	30	36	A3A8J1001
	5310-271-4640	...NUT, PLAIN, HEXAGON: MS35649-24 (96906)	EA	2				REF	REF	REF	REF	REF	36	A3A8J1001H2
	5305-763-3356	...SCREW, MACHINE: MS51959-5 (96906)	EA	2				REF	REF	REF	REF	REF	36	A3A8J1001H2
P--H	5935-892-9431	...CONNECTOR, RECPTACLE: DAF15SC7F151 (91146)	EA	REF				REF	REF	REF	REF	REF	36	A3A8J1004
	5310-271-4640	...NUT, PLAIN, HEXAGON: MS35649-24 (96906)	EA	2				REF	REF	REF	REF	REF	36	A3A8J1004H2
	5305-763-3357	...SCREW, MACHINE: MS51959-6 (96906)	EA	2				REF	REF	REF	REF	REF	36	A3A8J1004H2
	5310-058-2950	...WASHER, LOCK: MS35337-77 (96906)	EA	2				REF	REF	REF	REF	REF	36	A3A8J1004H2
P--H	5935-892-9431	...CONNECTOR, RECEPTACLE: DAF15SC7F151 (91146)	EA	REF				REF	REF	REF	REF	REF	36	A3A8J1005
	5310-271-4640	...NUT, PLAIN, HEXAGON: MS35649-24 (96906)	EA	2				REF	REF	REF	REF	REF	36	A3A8J1005H2
	5305-763-3357	...SCREW, MACHINE: MS51959-6 (96906)	EA	2				REF	REF	REF	REF	REF	36	A3A8J1005H2
	5310-058-2950	...WASHER, LOCK: MS35337-77 (96906)	EA	2				REF	REF	REF	REF	REF	36	A3A8J1005H2
P--H	5935-892-9431	...CONNECTOR, RECEPTACLE: DA15S1C7F151 (71468)	EA	1				*	2	2	19	10	36	A3A8J1006
	5310-766-3369	...NUT, SLEEVE: SMB549736 (70117)	EA	2				*	*	*	*	*	36	A3A8J1006H2
	5305-764-2966	...SCREW, MACHINE: MS51959-2 (96906)	EA	2				REF	REF	REF	REF	REF	36	A3A8J1006H2
P--H	5935-089-1165	...CONNECTOR, RECEPTACLE: DBMF13W3S (91146)	EA	1				*	2	2	19	10	36	A3A8J1003
	5821-073-3184	...NUT, SLEEVE: SMB549723-1 (70117)	EA	2				*	*	*	*	*	36	A3A8J1003H2
	5305-718-9459	...SCREW, MACHINE: MS35216-3 (96906)	EA	2				*	*	*	*	*	36	A3A8J1003H2
	5305-764-2966	...SCREW, MACHINE: MS51959-2 (96906)	EA	2				REF	REF	REF	REF	REF	36	A3A8J1003H2
P--H	5935-892-9430	...CONNECTOR RECEPTACLE: DCF37SC7F151 (91146)	EA	1				*	2	2	19	10	36	A3A8J1007
	5821-073-3185	...NUT, SLEEVE: SMB549723-2 (70117)	EA	2				*	*	*	*	*	36	A3A8J1007H2
	5305-718-9459	...SCREW, MACHINE: MS35216-3 (96906)	EA	2				REF	REF	REF	REF	REF	36	A3A8J1007H2
	5305-764-2966	...SCREW, MACHINE: MS51959-2 (96906)	EA	2				REF	REF	REF	REF	REF	36	A3A8J1007H2
P--H	5935-615-6263	...CONNECTOR, RECEPTACLE: DD50PC7 (71468)	EA	1				*	2	2	19	10	36	A3A8P1001
P--H	5935-941-9642	...CONNECTOR, PLUG: DM53740-5035 (71468)	EA	3				REF	REF	REF	REF	REF	36	A3A8P1002
P--H	5935-941-9642	...CONNECTOR, PLUG: DM53740-5035 (71468)	EA	REF				REF	REF	REF	REF	REF	36	A3A8P1003

(1) SMR CODE	(2) FEDERAL STOCK NUMBER	(3) DESCRIPTION REFERENCE NUMBER & MFR. CODE / USABLE ON CODE	(4) UNIT OF MEAS	(5) QTY INC IN UNIT	(6) 30-DAY DS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(7) 30-DAY GS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(8) 1 YR ALW PER 100 EQUIP CNTGCY	(9) DEPOT MAINT ALW PER 100 EQUIP	(10) ILLUSTRATIONS (a) FIG NO.	(b) ITEM NO. OR REFERENCE DESIGNATION
P--H	5935-941-9642	...CONNECTOR, PLUG: DM53740-5035 (71468)	EA	REF				REF	REF	REF	REF	REF	36	A3A8P1004
P--H	5935-756-7802	...CONNECTOR, RECEPTACLE: DM53743-5014 (71468)	EA	3				2	2	2	46	30	36	A3A8J1009
P--H	5935-756-7802	...CONNECTOR, RECEPTACLE: DM53743-5014 (71468)	EA	REF				REF	REF	REF	REF	REF	36	A3A8J1010
P--H	5935-756-7802	...CONNECTOR, RECEPTACLE: DM53743-5014 (71468)	EA	REF				REF	REF	REF	REF	REF	36	A3A8J1011
P--H	5935-728-3239	...CONNECTOR, RECEPTACLE: GX6-20S (95238)	EA	1				REF	REF	REF	REF	REF	36	A3A8P1008
P--H	5935-892-9428	...CONNECTOR, RECEPTACLE: 37-0316-00 (95104)	EA	1				*	2	2	19	10	36	A3A8J1002
	5310-271-4640	...NUT, PLAIN, HEXAGON: MS35649-24 (96906)	EA	2				REF	REF	REF	REF	REF	36	A3A8J1002H2
	5305-763-3357	...SCREW, MACHINE: MS51959-6 (96906)	EA	2				REF	REF	REF	REF	REF	36	A3A8J1002H2
	5310-058-2950	...WASHER, LOCK: MS35337-77 (96906)	EA	2				REF	REF	REF	REF	REF	36	A3A8J1002H2
P--O	5920-060-2424	...FUSE, CARTRIDGE: F02A250VAS (81349)	EA	3	6	16	29	2	4	7	352	300	36	A3A8F1001
P--O	5920-060-2424	...FUSE, CARTRIDGE: F02A250VAS (81349)	EA	REF	REF	REF	REF	REF	REF	REF	REF	REF	36	A3A8F1002
P--O	5920-060-2424	...FUSE, CARTRIDGE: F02A250VAS (81349)	EA	REF	REF	REF	REF	REF	REF	REF	REF	REF	36	A3A8F1003
P--O	5355-073-8483	...KNOB: SMD549842 (70117)	EA	1	*	2	2	*	2	2	13	6	37	A3A8MP2
	5305-059-8229	...SCREW, MACHINE: MS35214-4 (96906)	EA	1	*	*	*	*	*	*	*	*	37	A3A8MP2H1
	5310-058-2950	...WASHER, LOCK: MS35337-77 (96906)	EA	1	REF	REF	REF	REF	REF	REF	REF	REF	37	A3A8MP2H1
MD-H		...PLATE, COVER: SMD549867 (70117)	EA	1									36	A3A8MP3
	5305-059-8447	...SCREW, MACHINE: MS35216-12 (96906)	EA	11				REF	REF	REF	REF	REF	36	A3A8MP3H11
	5310-042-9609	...WASHER, LOCK: MS35338-78 (96906)	EA	11				REF	REF	REF	REF	REF	36	A3A8MP3H11
MD-O		...PLATE, IDENTIFICATION: SMB550284 (70117)	EA	1									37	A3A8MP4
P--O		...SCREW, TAPPING: BLACK OXIDE #2 SMB550153-2 (70117)	EA	4	2	3	5	2	2	2	46	30	37	A3A8MP4H4
P--H	5930-890-9726	...SWITCH, ROTARY: SMC550098 (70117)	EA	1				*	2	2	27	15	36	A3A8S1001
P--H	5940-836-3536	...TERMINAL, LUG: 4040-2HOTTINNED (77147)	EA	10				REF	REF	REF	REF	REF	36	A3A8E1
MD-H		..COVER ASSEMBLY: SMC549976 (70117)	EA	1									3	A3A9
X1-H		...COVER ASSEMBLY: SMD550100 (70117)	EA	1										A3A9MP1
	5325-639-0563	...FASTENER: 2700-7 (71286)	EA	2				*	2	2	13	6	3	A3A9MP2

(1) SMR CODE	(2) FEDERAL STOCK NUMBER	(3) DESCRIPTION REFERENCE NUMBER & MFR. CODE / USABLE ON CODE	(4) UNIT OF MEAS	(5) QTY INC IN UNIT	(6) 30-DAY DS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(7) 30-DAY GS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(8) 1 YR ALW PER 100 EQUIP CNTGCY	(9) DEPOT MAINT ALW PER 100 EQUIP	(10) ILLUSTRATIONS (a) FIG NO.	(b) ITEM NO. OR REFERENCE DESIGNATION
P--H	4130-763-1630	...FILTER, AIR: SMC549928 (70117)	EA	4				*	2	2	16	8	3	A3A9MP3
P--H		...WASHER, RETAINER: 26000W (71286)	EA	2				*	2	2	27	15	3	A3A9H1
MD-0		..PLATE, IDENTIFICATION: SMB550281-1 (70117)	EA	1										A3MP1
P--0		..SCREW, TAPPING: SMB550153-1 (70117)	EA	2	*	2	2	*	2	2	27	15	37	A3MP1H2
P--H	5120-757-2822	..TOOL, ADJUSTMENT: SMC549852 (70117)	EA	1				*	*	*	5	2	3	A3MP2
		GROUP 04 CONNECTOR ASSEMBLY												
		CONNECTOR ASSEMBLY: REFER TO GROUP 02 MOUNTING	EA	1									1	A4
X1		..CONNECTOR, RECEPTACLE: DDF50S12C7 (91146)	EA	1									40	A4J1008
X1		..SCREW, MACHINE: MS35216-3 (96906)	EA	2									40	A4J1008H2
X1		..WASHER, LOCK: MS35337-77 (96906)	EA	2									40	A4J1008H2
X1		..CONNECTOR, PLUG: DM53742-5004 (71468)	EA	3									40	A4P1009
X1		..CONNECTOR, PLUG: DM53742-5004 (71468)	EA	REF									40	A4P1010
X1		..CONNECTOR, PLUG: DM53742-5004 (71468)	EA	REF									40	A4P1011
X1		..PLATE, CONNECTOR: DD50924-1 (71468)	EA	1									40	A4MP1
X1		..PLATE, HOUSING: SMC549735 (70117)	EA	1										A4MP2
X1		..SCREW, MACHINE: MS35216-1 (96906)	EA	4									40	A4MP2H4
X1		..WASHER, LOCK: MS35337-77 (96906)	EA	4									40	A4MP2H4

(1) SMR CODE	(2) FEDERAL STOCK NUMBER	(3) DESCRIPTION REFERENCE NUMBER & MFR. CODE	USABLE ON CODE	(4) UNIT OF MEAS	(5) QTY INC IN UNIT	(6) 30-DAY DS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(7) 30-DAY GS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(8) 1 YR ALW PER 100 EQUIP CNTGCY	(9) DEPOT MAINT ALW PER 100 EQUIP	(10) ILLUSTRATIONS (a) FIG NO.	(b) ITEM NO. OR REFERENCE DESIGNATION
		GROUP 05 COUPLER ANTENNA													
		.COUPLER, ANTENNA: CU942ARC54:	A											1	A5
		.COUPLER, ANTENNA: CU943ARC54:	B											1	A5
		.COUPLER, ANTENNA: CU942AAR54:	C											1	A5
X1		..BASE, ANTENNA SUPPORT: 758-4789-002; (13499)		EA	1										
P--D	3110-900-9618	..BEARING, BALL, ANNULAR: SFR1683MMEEK25; (83086)		EA	6								30	41	A5MP1
M--D		..BUTTON, THREADED: SMC381479: (80063)		EA	1									41	A5E1
P--H	5910-666-8927	..CAPACITOR: CC21CH220J; (81349)	C	EA	1				*	2	2	12	5	41	A5C154
P--H		..CAPACITOR, FIXED CER DIELECTRIC: 20C109; (01939)		EA	2				*	2	2	19	10	41	A5C144
P--H		..CAPACITOR, FIXED CER DIELECTRIC: 20C109; (01939)		EA	REF				REF	REF	REF	REF	REF	41	A5C145
		CHASSIS, ELECTRICAL EQUIPMENT:													
P--H	5340-993-9522	...CLIP: MS17160-3; (96906)		EA	1				*	*	*	*	*	41	A5A1MP1
P--H	5340-660-0968	...CLIP, SPRING TENSION: 100-200-4-4; (99378)		EA	2				*	*	*	*	*	41	A5MP41
X1-H		...PIN, STRAIGHT HEADLESS: SMB281462; (80063)		EA	6										
X1-H		...PLATE ASSEMBLY: SMD381489; (80063)		EA	1										
X1-H		....NUT, INSERT: SMC381481; (80063)		EA	10										
X1-H		....PLATE: SMD381489-1; (80063)		EA	1										
X1-H		...PLATE, MOUNTING: SMD381488; (80063)		EA	1										
X1-H		...POST, MOUNTING: SMB381431; (80063)		EA	4										

(1) SMR CODE	(2) FEDERAL STOCK NUMBER	(3) DESCRIPTION REFERENCE NUMBER & MFR. CODE	USABLE ON CODE	(4) UNIT OF MEAS	(5) QTY INC IN UNIT	(6) 30-DAY DS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(7) 30-DAY GS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(8) 1 YR ALW PER 100 EQUIP CNTGCY	(9) DEPOT MAINT ALW PER 100 EQUIP	(10) ILLUSTRATIONS (a) FIG NO.	(b) ITEM NO. OR REFERENCE DESIGNATION
P--D	5305-054-5648	...SCREW: MS51957-14; (96906)		EA	8								*	41	A5A1H35
P--D	5305-770-2533	...SCREW: MS51959-13; (96906)		EA	8								*	41	A5A1H9
X1		...SPACER, CHASSIS: SMC381448; (80063)		EA	1										
X1		...SPACER, CHASSIS: SMD381445; (80063)		EA	1										
P--H	5935-552-7660	...CONNECTOR: MS27035-625B; (96906)		EA	1				*	2	2	19	10	41	A5J102
P--H	5915-922-7730	..FILTER, RADIO INTERFERENCE: JN14-1558A; (14101)	C	EA	1				*	2	2	12	5	41	A5J101
P--H	5935-826-1007	..CONNECTOR: MS3112E12-10P; (96906)	AB	EA	1				*	2	2	19	10	41	A5J101
P--D	5325-286-6047	..GROMMET: MS35489-1; (96906)	C	EA	2								*	41	A5H3
P--D		..GROMMET, RUBBER: 101; (75543)	AB	EA	2								*	41	A5H3
P--H	6105-899-9032	..MOTOR, DIRECT CURRENT: SMC381447 (80063)		EA	1				*	*	2	10	4	41	A5B101
X1-H		...GEAR, BEVEL: SMD381450; (80063)		EA	1										
X1-H		...PIN: MS35672-2; (96906)		EA	1										
P--H	5310-208-3786	..NUT: NAS671C4; (80205)		EA	2				*	*	*	*	*	41	A5H22
P--D		..NUT, PLAIN, HEXAGON: SMB381422; (80063)		EA	2								*		
P--D		..NUT, SELF-LOCKING: SMB381423 (80063)		EA	8								*		
P--H	5945-821-4800	..RELAY, ARMATURE: SMD504621 (80063)		EA	1				*	2	2	12	5	41	A5K101
P--H	5305-054-5646	..SCREW: MS51957-12; (96906)		EA	4				REF	REF	REF	REF	REF	41	A5H28
P--H		..SCREW: MS51957-14; (96906)		EA	5				REF	REF	REF	REF	REF	41	A5H34
P--D	5305-764-2966	..SCREW: MS51959-2; (96906)		EA	2								REF	41	A5H12
P--D	5305-054-5637	..SCREW: MS51957-3; (96906)		EA	3										
P--D		..SCREW, MACHINE: SMB381426-2; (80063)		EA	2								*	41	A5H13
P--H		..SCREW, MACHINE: SMB381427-2; (80063)		EA	2				*	*	*	*	*	41	A5H14
P--H	5960-811-8372	..SEMICONDUCTOR DEVICE: IN3189; (81349)		EA	2				*	2	2	19	10	41	A5CR101
P--H	5960-811-8372	..SEMICONDUCTOR DEVICE: IN3189; (81349)		EA	REF				REF	REF	REF	REF	REF	41	A5CR101

(1) SMR CODE	(2) FEDERAL STOCK NUMBER	(3) DESCRIPTION REFERENCE NUMBER & MFR. CODE	USABLE ON CODE	(4) UNIT OF MEAS	(5) QTY INC IN UNIT	(6) 30-DAY DS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(7) 30-DAY GS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(8) 1 YR ALW PER 100 EQUIP CNTGCY	(9) DEPOT MAINT ALW PER 100 EQUIP	(10) ILLUSTRATIONS (a) FIG NO.	(b) ITEM NO. OR REFERENCE DESIGNATION
P--D	5985-878-4461	..SHAFT ASSEMBLY: SMC381442; (80063)		EA	1								4	41	A5MP11
X1		...GEAR, SPUR: SMC381437; (80063)		EA	1										
X1		...PIN: MS35672-7; (96906)		EA	1										
X1		...RING: MS16633-18; (96906)		EA	1										
X1		...SHAFT, SHOULDERED: SMC381439-2; (80063)		EA	1										
P--D	5985-878-4464	..SHAFT ASSEMBLY: SMC381444; (80063)		EA	1								4	41	A5MP12
X1		...GEAR, SPUR: SMD381436; (80063)		EA	1										
X1		...PIN: MS35672-8; (96906)		EA	1										
X1		...RING: MS16633-18; (96906)		EA	1										
X1		...SHAFT, SHOULDERED: SMC381439-1; (80063)		EA	1										
P--D	5985-878-4465	..SHAFT, ASSEMBLY: SMD381435; (80063)		EA	1								4	41	A5MP10
X1		...GEAR, BEVEL: SMD381449; (80063)		EA	1										
X1		...GEAR, SPUR: SMC381437; (80063)		EA	1										
X1		...PIN: MS35672-7; (96906)		EA	2										
X1		...SHAFT, STRAIGHT: SMC381433; (80063)		EA	1										
X1		..SPACER, SLEEVE: SMC381451-2; (80063)		EA	2										
X1		..SPACER, SLEEVE: SMC381451-2; (80063)		EA	REF										
X1		..SPACER, SLEEVE: SMC381451-3; (80063)		EA	2										
X1		..SPACER, SLEEVE: SMC381451-3; (80063)		EA	REF										
M--D		..SPACER, SLEEVE: SMC381451-4; (80063)		EA	2									41	A5MP17
P--D		..SWITCH, SECTION, ROTARY: SMD381418 (80063)	C	EA	1								15	41	A5S103A
P--D	5930-872-0957	..SWITCH, SECTION, ROATRY: 242356RK; (76854)	AB	EA	1								15	41	A5S103A
P--D		..SWITCH, SECTION, ROTARY: SMD381417 (80063)	C	EA	1								15	41	A5S102B
P--D		..SWITCH, SECTION, ROATRY: 242355RK; (76854)	AB	EA	1								15	41	A5S102B

(1) SMR CODE	(2) FEDERAL STOCK NUMBER	(3) DESCRIPTION REFERENCE NUMBER & MFR. CODE	USABLE ON CODE	(4) UNIT OF MEAS	(5) QTY INC IN UNIT	(6) 30-DAY DS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(7) 30-DAY GS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(8) 1 YR ALW PER 100 EQUIP CNTGCY	(9) DEPOT MAINT ALW PER 100 EQUIP	(10) ILLUSTRATIONS (a) FIG NO.	(b) ITEM NO. OR REFERENCE DESIGNATION
P--D		..SWITCH, SECTION, ROTARY: SMD381416 (80063)	C	EA	1								15	41	A5S102A
P--D	5930-871-8547	..SWITCH, SECTION, ROTARY: 242354RK; (76854)	AB	EA	1								15	41	A5S102A
P--D	5821-089-8202	..SWITCH, SUBASSEMBLY, COUPLER: SMD620400 (80063)	C	EA	1								10	41	A5S101
X1		..SWITCH, SUBASSEMBLY, COUPLER	AB	EA	1										
X1		...CAPACITOR: CC20UJ050C; (81349)	C	EA	1										
X1		...CAPACITOR, FIXED, CERAMIC: CC20UJ510F; (81349)	AB	EA	1										
X1		...CAPACITOR: CC20UJ050C; (81349)	C	EA	1										
X1		...CAPACITOR, FIXED, CERAMIC: CC20UJ100C; (81349)	AB	EA	1										
X1		...CAPACITOR: CC20UJ060C; (81349)	C	EA	1										
X1		...CAPACITOR, FIXED, CERAMIC: CC20UJ120J; (81349)	AB	EA	2										
X1		...CAPACITOR: CC20UJ120J; (81349)	C	EA	REF										
X1		...CAPACITOR, FIXED, CERAMIC: CC20UJ270F; (81349)	AB	EA	1										
X1		...CAPACITOR: CC20UJ150J; (81349)		EA	2										
X1		...CAPACITOR: CC20UJ150J; (81349)	C	EA	REF										
X1		...CAPACITOR, FIXED, CERAMIC: CC20UJ050C; (81349)	AB	EA	1										
X1		...CAPACITOR: CC20UJ150G; (81349)	C	EA	1										
X1		...CAPACITOR: CC20UJ200G; (81349)	C	EA	1										
X1		...CAPACITOR, FIXED, CERAMIC: CC20UJ300F; (81349)	AB	EA	1										
X1		...CAPACITOR: CC20UJ240G: (81349)	C	EA	1										
X1		...CAPACITOR, FIXED, CERAMIC: CC20UJ330F; (81349)	AB	EA	1										
X1		...CAPACITOR: CC20UJ270F; (81349)	C	EA	1										
X1		...CAPACITOR: CC20UH100C; (81349)	AB	EA	1										
X1		...CAPACITOR: CC20UH300F; (81349)	C	EA	1										
X1		...CAPACITOR,FIXED, CERAMIC: CC20UJ240G; (81349)	AB	EA	1										
X1		...CAPACITOR: CC20UJ360F; (81349)	C	EA	1										
X1		...CAPACITOR FIXED CERAMIC: CC20UJ060C; (81349)	AB	EA	1										

(1) SMR CODE	(2) FEDERAL STOCK NUMBER	(3) DESCRIPTION REFERENCE NUMBER & MFR. CODE	USABLE ON CODE	(4) UNIT OF MEAS	(5) QTY INC IN UNIT	(6) 30-DAY DS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(7) 30-DAY GS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(8) 1 YR ALW PER 100 EQUIP CNTGCY	(9) DEPOT MAINT ALW PER 100 EQUIP	(10) ILLUSTRATIONS (a) FIG NO.	(b) ITEM NO. OR REFERENCE DESIGNATION
X1		...CAPACITOR: CC20UJ430F; (81349)	C	EA	1										
X1		...CAPACITOR, FIXED, CERAMIC: CC20UJ060C; (81349)	AB	EA	1										
X1		...CAPACITOR: CC20UJ470F; (81349)	C	EA	1										
X1		...CAPACITOR, FIXED, CERAMIC: CC20UJ300F; (81349)	AB	EA	1										
X1		...CAPACITOR: CC20UJ510F; (81349)	C	EA	1										
X1		...CAPACITOR, FIXED, CERAMIC: CC20UJ200G; (81349)	AB	EA	1										
X1		...CAPACITOR: CC20UJ620F; (81349)	C	EA	1										
X1		...CAPACITOR, FIXED, CERAMIC: CC20U050C; (81349)	AB	EA	1										
X1		...CAPACITOR: CC20UJ620F; (81349)	C	EA	1										
X1		...CAPACITOR, FIXED, CERAMIC: CC20UJ430F; (81349)	AB	EA	1										
X1		...CAPACITOR: CC20UJ620F; (81349)	C	EA	1										
X1		...CAPACITOR, FIXED, CERAMIC: CC20UJ820F; (81349)	AB	EA	1										
X1		...CAPACITOR: CC20UJ620F; (81349)	C	EA	1										
X1		...CAPACITOR: CC301UJ820F; (81349)	C	EA	1										
X1		...CAPACITOR, FIXED, CERAMIC: CC20UJ100C; (81349)	AB	EA	1										
X1		...CAPACITOR: CC30UJ820F; (81349)	C	EA	1										
X1		...CAPACITOR, FIXED, CERAMIC: CC220UJ100C; (81349)	AB	EA	1										
X1		...CAPACITOR: CC30UJ820F; (81349)		EA	2										
X1		...CAPACITOR: CC30UJ820F; (81349)	C	EA	REF										
X1		...COIL, RADIO, FREQUENCY: SMD381454-10; (80063)	C	EA	1										
X1		...COIL, RADIO, FREQUENCY: 758-4806-012; (13499)	B	EA	1										
X1		...COIL, RADIO, FREQUENCY: SMD381454-10; (80063)	C	EA	1										
X1		...COIL, RADIO, FREQUENCY: 758-4806-011; (13499)	B	EA	1										
X1		...COIL, RADIO, FREQUENCY: SMD381454-10; (80063)	C	EA	1										
X1		...COIL, RADIO, FREQUENCY: 758-4806-011; (13499)	A	EA	1										

(1) SMR CODE	(2) FEDERAL STOCK NUMBER	(3) DESCRIPTION REFERENCE NUMBER & MFR. CODE	USABLE ON CODE	(4) UNIT OF MEAS	(5) QTY INC IN UNIT	(6) 30-DAY DS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(7) 30-DAY GS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(8) 1 YR ALW PER 100 EQUIP CNTGCY	(9) DEPOT MAINT ALW PER 100 EQUIP	(10) ILLUSTRATIONS (a) FIG NO.	(b) ITEM NO. OR REFERENCE DESIGNATION
X1		...COIL, RADIO, FREQUENCY: SMD381454-3; (80063)	C	EA	1										
X1		...COIL, RADIO, FREQUENCY: 758-4806-003; (13499)	AB	EA	1										
X1		...COIL, RADIO, FREQUENCY: AMD381454-3; (80063)	C	EA	1										
X1		...COIL, RADIO, FREQUENCY: 758-4806-004; (13499)	AB	EA	1										
X1		...COIL, RADIO, FREQUENCY: SMD381454-4; (80063)	C	EA	1										
X1		...COIL, RADIO, FREQUENCY: 758-4806-006; (13499)	AB	EA	1										
X1		...COIL, RADIO, FREQUENCY: SMD381454-6; (80063)		EA	3										
X1		...COIL, RADIO, FREQUENCY: SMD381454-6; (80063)		EA	REF										
X1		...COIL, RADIO, FREQUENCY: SMD381454-6; (80063)	C	EA	REF										
X1		...COIL, RADIO, FREQUENCY: 758-4806-004; (13499)	AB	EA	1										
X1		...COIL, RADIO, FREQUENCY: SMD381454-6; (80063)	C	EA	1										
X1		...COIL, RADIO, FREQUENCY: 758-4806-006; (13499)	AB	EA	1										
X1		...COIL, RADIO, FREQUENCY: SMD381454-6; (80063)	C	EA	1										
X1		...COIL, RADIO, FREQUENCY: 758-4806-005; (13499)	AB	EA	1										
X1		...COIL, RADIO, FREQUENCY: SMD381454-6; (80063)	C	EA	1										
X1		...COIL, RADIO, FREQUENCY: 758-4806-003; (13499)	AB	EA	1										
X1		...COIL, RADIO, FREQUENCY: SMD381454-6; (80063)	C	EA	1										
X1		...COIL, RADIO, FREQUENCY: 758-4806-008; (13499)	AB	EA	1										
X1		...COIL, RADIO, FREQUENCY: SMD381454-6; (80063)	C	EA	1										
X1		...COIL, RADIO, FREQUENCY: 758-4806-010; (13499)	B	EA	1										
X1		...COIL, RADIO, FREQUENCY: SMD381454-8; (80063)		EA	3										
X1		...COIL, RADIO, FREQUENCY: SMD381454-8; (80063)		EA	REF										
X1		...COIL, RADIO, FREQUENCY: SMD381454-8; (80063)	C	EA	REF										
X1		...COIL, RADIO, FREQUENCY: 758-4806-010; (13499)	A	EA	1										
X1		...COIL, RADIO, FREQUENCY: SMD381454-8; (80063)	C	EA	1										

(1) SMR CODE	(2) FEDERAL STOCK NUMBER	(3) DESCRIPTION REFERENCE NUMBER & MFR. CODE	USABLE ON CODE	(4) UNIT OF MEAS	(5) QTY INC IN UNIT	(6) 30-DAY DS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(7) 30-DAY GS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(8) 1 YR ALW PER 100 EQUIP CNTGCY	(9) DEPOT MAINT ALW PER 100 EQUIP	(10) ILLUSTRATIONS (a) FIG NO.	(b) ITEM NO. OR REFERENCE DESIGNATION
X1		...COIL, RADIO, FREQUENCY: 758-4806-008; (13499)	AB	EA	1										
X1		...COIL, RADIO, FREQUENCY: SMD381454-8; (80063)	C	EA	1										
X1		...COIL, RADIO, FREQUENCY: 758-4806-011; (13499)	AB	EA	1										
X1		...COIL, RADIO, FREQUENCY: SMD381454-8; (80063)	C	EA	1										
X1		...COIL, RADIO, FREQUENCY: 758-4806-011; (13499)	B	EA	1										
X1		...NUT, PLAIN HEXAGON: SMB381422; (80063)	C	EA	2										
X1		...PLATE, MOUNTING, COIL: SMD381459; (80063)	C	EA	1										
X1		...RING, MOUNTING, CAPACITOR: SMD381453; (80063)	C	EA	1										
X1		...SCREW, MACHINE: SMB381427-1; (80063)	C	EA	2										
X1		...SPACER, SLEEVE: SMD381451-1; (80063)	C	EA	2										
X1		...SPACER, SLEEVE: SMC381451-1; (80063)	C	EA	REF										
X1		...SPACER, SLEEVE: SCM381451-2; (80063)	C	EA	2										
X1		...SPACER, SLEEVE: SMC381451-2; (80063)	C	EA	REF										
X1		...SWITCH, SECTION, ROTARY: 261156RK; (76854)	C	EA	1										
X1		...SWITCH, SECTION, ROTARY: 242353RK; (76854)	AB	EA	1										
X1		...SWITCH, SECTION, ROTARY: 261157RK; (76854)	C	EA	1										
X1		...SWITCH, SECTION, ROTARY: 242352RK; (76854)	AB	EA	1										
X1		...WASHER, NONMETALLIC: 107072-8; (37695)	C	EA	2										
X1		...WASHER, SPRING TENSION: 310-4714-00; (79807)	AB	EA	3										
P--D	5821-089-8203	..SWITCH, SUBASSEMBLY, COUPLER: SMD-620379 (80063)	C	EA	1								15	41	A5S103
X1		..SWITCH, SUBASSEMBLY, COUPLER	AB	EA	1										
X1		...ANTENNA CONNECTOR, ELECTRIC: SMB620386; (80063)	C	EA	1										
X1		....BRACKET, MTG., CONNECTOR: SMC381432; (80063)	C	EA	1										
X1		....CONNECTOR ASSEMBLY: SMD381446; (80063)	C	EA	1										

(1) SMR CODE	(2) FEDERAL STOCK NUMBER	(3) DESCRIPTION REFERENCE NUMBER & MFR. CODE	USABLE ON CODE	(4) UNIT OF MEAS	(5) QTY INC IN UNIT	(6) 30-DAY DS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(7) 30-DAY GS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(8) 1 YR ALW PER 100 EQUIP CNTGCY	(9) DEPOT MAINT ALW PER 100 EQUIP	(10) ILLUSTRATIONS (a) FIG NO.	(b) ITEM NO. OR REFERENCE DESIGNATION
X1		....RING: MS16633-18; (96906)	C	EA	1										
X1		....RING, RETAINING: 5133-18C; (79136)	AB	EA	1										
P--H		...CONNECTOR: SMB381472 (80063)		EA	1				*	2	2	19	10	41	A5A2P1
X1		...CAPACITOR: CC20UJ120G; (81349)	C	EA	1										
X1		...CAPACITOR, FIXED, CERAMIC: CC20UJ070C; (81349)	AB	EA	1										
X1		...CAPACITOR: CC20UJ120G; (81349)	C	EA	1										
X1		...CAPACITOR, FIXED, CERAMIC: CC20UJ040C; (81349)	AB	EA	1										
X1		...CAPACITOR: CC20UJ030C; (81349)	C	EA	1										
X1		...CAPACITOR, FIXED, CERAMIC: CC22CK101C; (81349)	AB	EA	1										
X1		...CAPACITOR: CC20UJ030C; (81349)	C	EA	1										
X1		...CAPACITOR, FIXED, CERAMIC: CC20UJ070C; (81349)	AB	EA	1										
X1		...CAPACITOR: CC20UJ030C; (81349)	C	EA	1										
X1		...CAPACITOR: CC20UJ040C; (81349)	C	EA	1										
X1		...CAPACITOR, FIXED, CERAMIC: CC20UJ120J; (81349)	AB	EA	1										
X1		...CAPACITOR: CC20UJ040C; (81349)	C	EA	1										
X1		...CAPACITOR: CC22CK020C; (81349)	AB	EA	1										
X1		...CAPACITOR, FIXED, CERAMIC: CC20UJ050C; (81349)		EA	2										
X1		...CAPACITOR, FIXED, CERAMIC: CC20UJ050C; (81349)	AB	EA	REF										
X1		...CAPACITOR: CC20UJ060C; (81349)	C	EA	1										
X1		...CAPACITOR, FIXED, CERAMIC: CC20UJ030C; (81349)	AB	EA	1										
X1		...CAPACITOR: CC20UJ070C; (81349)	C	EA	1										
X1		...CAPACITOR, FIXED, CERAMIC: CC20UJ040C; (81349)	AB	EA	1										
X1		...CAPACITOR: CC20UJ070C; (81349)	C	EA	1										
X1		...CAPACITOR: CC20UJ100C; (81349)	C	EA	1										

(1) SMR CODE	(2) FEDERAL STOCK NUMBER	(3) DESCRIPTION REFERENCE NUMBER & MFR. CODE	USABLE ON CODE	(4) UNIT OF MEAS	(5) QTY INC IN UNIT	(6) 30-DAY DS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(7) 30-DAY GS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(8) 1 YR ALW PER 100 EQUIP CNTGCY	(9) DEPOT MAINT ALW PER 100 EQUIP	(10) ILLUSTRATIONS (a) FIG NO.	(b) ITEM NO. OR REFERENCE DESIGNATION
X1		...CAPACITOR, FIXED, CERAMIC: CC20UJ200G; (81349)	AB	EA	1										
X1		...CAPACITOR: CC20UJ100C; (81349)	C	EA	REF										
X1		...CAPACITOR, FIXED, CERAMIC: CC20UJ070C; (81349)	AB	EA	1										
X1		...CAPACITOR: CC20UJ100C; (81349)	C	EA	1										
X1		...CAPACITOR: CC20UJ300F; (81349)	C	EA	1										
X1		...CAPACITOR, FIXED, CERAMIC: CC20UJ200G; (81349)	AB	EA	1										
X1		...CAPACITOR: CC20UK010C; (81349)	C	EA	1										
X1		...CAPACITOR, FIXED, CERAMIC: CC20UJ090C; (81349)	AB	EA	1										
X1		...CAPACITOR: CC20UK010C; (81349)	C	EA	1										
X1		...CAPACITOR: CC20UK020C; (81349)	C	EA	1										
X1		...CAPACITOR: CC20UJ090C; (81349)	AB	EA	1										
X1		...CAPACITOR: CC20UK020C; (81349)	C	EA	1										
X1		...CAPACITOR, FIXED, CERAMIC: CC22CK020C; (81349)	AB	EA	1										
X1		...CAPACITOR: CC20UK020C; (81349)	C	EA	1										
X1		...CAPACITOR, FIXED, CERAMIC: CC20UJ200G; (81349)	AB	EA	1										
X1		...CAPACITOR, FIXED, CERAMIC: CC20UJ430F; (81349)	AB	EA	1										
X1		...CAPACITOR, FIXED, CERAMIC: CC22UJ510F; (81349)	AB	EA	1										
X1		...CAPACITOR, FIXED, CERAMIC: CC20UJ270F; (81349)	AB	EA	1										
X1		...CAPACITOR, FIXED, CERAMIC: CC20UJ120J; (81349)	AB	EA	1										
X1		...CAPACITOR, FIXED, CERAMIC: CC20UJ070C; (81349)	AB	EA	1										
X1		...CAPACITOR, FIXED, CERAMIC: CC20UJ090C; (81349)	AB	EA	1										
X1		...COIL, RADIO, FREQUENCY: SMD381454-1; (80063)		EA	1										
X1		...COIL, RADIO, FREQUENCY: SMD381454-1; (80063)	C	EA	REF										
X1		...COIL, RADIO, FREQUENCY: SMD381454-2; (80063)	C	EA	1										
X1		...COIL, RADIO, FREQUENCY: 758-4806-001; (01349)	AB	EA	1										

(1) SMR CODE	(2) FEDERAL STOCK NUMBER	(3) DESCRIPTION REFERENCE NUMBER & MFR. CODE	USABLE ON CODE	(4) UNIT OF MEAS	(5) QTY INC IN UNIT	(6) 30-DAY DS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(7) 30-DAY GS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(8) 1 YR ALW PER 100 EQUIP CNTGCY	(9) DEPOT MAINT ALW PER 100 EQUIP	(10) ILLUSTRATIONS (a) FIG NO.	(b) ITEM NO. OR REFERENCE DESIGNATION
X1		...COIL, RADIO, FREQUENCY: SMD381454-2; (80063)	C	EA	1										
X1		...COIL, RADIO, FREQUENCY: 758-4806-003; (13499)	AB	EA	1										
X1		...COIL, RADIO, FREQUENCY: SMD381454-3; (80063)	C	EA	1										
X1		...COIL, RADIO, FREQUENCY: 758-4806-003; (13499)	AB	EA	1										
X1		...COIL, RADIO, FREQUENCY: SMD381454-3; (80063)	C	EA	1										
X1		...COIL, RADIO, FREQUENCY: 758-4806-002; (13499)	AB	EA	1										
X1		...COIL, RADIO, FREQUENCY: SMD381454-6; (80063)	C	EA	1										
X1		...COIL, RADIO, FREQUENCY: 758-4806-003; (13499)	AB	EA	1										
X1		...COIL, RADIO, FREQUENCY: SMD381454-6; (80063)	C	EA	1										
X1		...COIL, RADIO, FREQUENCY: 758-4806-003; (13499)	AB	EA	1										
X1		...COIL, RADIO, FREQUENCY: SMD381454-6; (80063)	C	EA	1										
X1		...COIL, RADIO, FREQUENCY: 758-4806-003; (13499)	AB	EA	1										
X1		...COIL, RADIO, FREQUENCY: SMD381454-8; (80063)	C	EA	1										
X1		...COIL, RADIO, FREQUENCY: 758-4806-006; (13499)	AB	EA	1										
X1		...COIL, RADIO, FREQUENCY: SMD381454-8; (80063)	C	EA	1										
X1		...COIL, RADIO, FREQUENCY: 758-4806-006; (13499)	AB	EA	1										
X1		...COIL, RADIO, FREQUENCY: 758-4806-010; (13499)	A	EA	2										
X1		...COIL, RADIO, FREQUENCY: 758-4806-010; (13499)	A	EA	REF										
X1		...COIL, RADIO, FREQUENCY: 758-4806-007; (13499)	B	EA	1										
X1		...COIL, RADIO, FREQUENCY: 758-4806-010; (13499)	A	EA	1										
X1		...COIL, RADIO, FREQUENCY: 758-4806-009; (13499)	A	EA	1										
X1		...NUT, PLAIN, HEXAGON: SMB381422; (80063)	C	EA	2										
X1		...PLATE, MOUNTING: SMD381459; (80063)	C	EA	1										
X1		...RING, MOUNTING: SMD381453; (80063)	C	EA	1										
X1		...SCREW, MACHINE: SMC381426; (80063)	C	EA	2										

(1) SMR CODE	(2) FEDERAL STOCK NUMBER	(3) DESCRIPTION REFERENCE NUMBER & MFR. CODE	USABLE ON CODE	(4) UNIT OF MEAS	(5) QTY INC IN UNIT	(6) 30-DAY DS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(7) 30-DAY GS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(8) 1 YR ALW PER 100 EQUIP CNTGCY	(9) DEPOT MAINT ALW PER 100 EQUIP	(10) ILLUSTRATIONS (a) FIG NO.	(b) ITEM NO. OR REFERENCE DESIGNATION
X1		...SPACER, SLEEVE: SMC381451-1; (80063)	C	EA	2										
X1		...SPACER, SLEEVE: SMC381451-1; (80063)	C	EA	REF										
X1		...SPACER, SLEEVE: SMC381451-2; (80063)	C	EA	2										
X1		...SPACER, SLEEVE: SMC381451-2; (80063)	C	EA	REF										
X1		...SPACER, SLEEVE: SMC381451-3; (80063)	C	EA	1										
X1		...SWITCH, ROTARY: 261156RK; (76854)		EA	1										
X1		...SWITCH, ROTARY: 261157RK; (76854)		EA	1										
P--H		..TERMINAL, LUG: SMC504699; (80063)	C	EA	2				*	2	2	19	10	41	A5E103
P--H		..TERMINAL, STUD: SMB381463; (80063)	C	EA	5				*	2	2	27	15	41	A5E104
P--H	5310-782-1349	..WASHER: MS15795-804; (96906)	C	EA	1				*	*	*	*	*	41	A5H15
P--H		..WASHER: NAS1640-2; (80205)	C	EA	3				*	*	*	*	*	41	A5H21
P--H		..WASHER: NAS1640-4; (80205)	C	EA	10				*	*	*	*	*	41	A5H27
P--H	5310-973-8157	..WASHER: NAS1640-6; (80205)	C	EA	2				*	*	*	*	*		
P--H		..WASHER, FLAT: SMC381428; (80063)	C	EA	3				*	*	*	*	*	41	A5H25
P--H		..WASHER, SPRING, TENSION: 107070-502; (37695)	C	EA	3				*	*	*	*	*	41	A5H5
P--D		..COVER, ANTENNA COUPLER: SMD381469; (80063)	C	EA	1								1	41	A5MP9
P--D	5821-871-8538	..COVER, ANTENNA COUPLER: 758-4810-001; (95104)	AB	EA	1								2	41	A5MP9
X1		...INSERT, SCREW, THREAD: SMC381411; (80063)	C	EA	12										

(1) SMR CODE	(2) FEDERAL STOCK NUMBER	(3) DESCRIPTION REFERENCE NUMBER & MFR. CODE	USABLE ON CODE	(4) UNIT OF MEAS	(5) QTY INC IN UNIT	(6) 30-DAY DS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(7) 30-DAY GS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(8) 1 YR ALW PER 100 EQUIP CNTGCY	(9) DEPOT MAINT ALW PER 100 EQUIP	(10) ILLUSTRATIONS (a) FIG NO.	(b) ITEM NO. OR REFERENCE DESIGNATION
P--D	5330-089-8239	..GASKET: SMC381438; (80063)	C	EA	1								20	41	A5H1
P--D	5821-871-8537	..GASKET, RUBBER: 758-4785-001; (95104)	AD	EA	1								20	41	A5H1
P--D	5330-089-8128	..GASKET, RUBBER: SMD381440; (80063)		EA	1								20	41	A5H2
P--D	5821-089-8205	..PLATE ASSEMBLY: SMC381441; (80063)	C	EA	1								2	41	A5A3MP3
X1		...INSERT: MS21209C0615; (96906)	C	EA	4										
X1		...INSERT: MS21209F9-15; (96906)	C	EA	1										
X1		...PLATE: SMC381441-1; (80063)	C	EA	1										
P--H	5305-727-8832	..SCREW, MACHINE: MS51959-29; (96906)	C	EA	4				*	*	*	*	*	41	A5H32
MD		..SPACER: SMB381482 (80063)	C	EA	1									41	A5MP30
P--D		..WASHER: NAS1640-6; (80205)	C	EA	1								REF	41	A5H20
MD-H		..PLATE, IDENTIFICATION: 158836-2; (37695)	C	EA	1									41	A5MP33
P--D	5821-089-8204	..PLATE, MOUNTING: SMC620407; (80063)	C	EA	1								2	41	A5MP34
X1		...CLIP: NAS1464-038-03C; (80205)	C	EA	1										
X1		...NUT, SELF-LOCKING: F22NCFMA1-26; (72962)	C	EA	2										
X1		...PLATE ASSEMBLY: SMD381471; (80063)	C	EA	1										
X1		....NUT, SELF-LOCKING: SMC381425; (80063)	C	EA	6										
X1		....PLATE: SMD381471-1; (80063)	C	EA	1										
P--H	5340-089-8232	..PLATE, REINFORCING: SMD381456; (80063)	C	EA	1				*	*	*	5	2	41	A5MP1
P--H	5305-054-6670	..SCREW: MS51957-45; (96906)	C	EA	6				*	*	*	*	*	41	A5H30
P--H	5305-770-2533	..SCREW: MS51959-13; (96906)	C	EA	6				REF	REF	REF	REF	REF	41	A5H31
P--H	5305-770-2580	..SCREW: MS51959-16; (96906)	C	EA	2				*	*	*	*	*	41	A5H33
P--H	5305-764-2966	..SCREW: MS51959-2; (96906)	C	EA	2				*	*	*	*	*	41	A5H11

(1) SMR CODE	(2) FEDERAL STOCK NUMBER	(3) DESCRIPTION REFERENCE NUMBER & MFR. CODE	USABLE ON CODE	(4) UNIT OF MEAS	(5) QTY INC IN UNIT	(6) 30-DAY DS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(7) 30-DAY GS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(8) 1 YR ALW PER 100 EQUIP CNTGCY	(9) DEPOT MAINT ALW PER 100 EQUIP	(10) ILLUSTRATIONS (a) FIG NO.	(b) ITEM NO. OR REFERENCE DESIGNATION
P--H	6105-089-8101	..SPACER, MOTOR: SMC381457; (80063)	C	EA	1				*	*	*	4	1	41	A5MP32
P--H	5821-938-4526	..SPACER, RELAY: 446719-1; (37695)	C	EA	2				*	*	*	5	2	41	A5MP38
P--H		..TERMINAL, STUD: SMB381463	C	EA	2				REF	REF	REF	REF	REF	41	A5E2

SECTION III SPECIAL TOOLS, TEST & SUPPORT EQUIPMENT FOR DIRECT SUPPORT, GENERAL SUPPORT & DEPOT MAINTENANCE

(1) SMR CODE	(2) FEDERAL STOCK NUMBER	(3) DESCRIPTION REFERENCE NUMBER & MFR. CODE / USABLE ON CODE	(4) UNIT OF MEAS	(5) QTY INC IN UNIT	(6) 30-DAY DS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(7) 30-DAY GS MAINT ALLOWANCE (a) 1-20	(b) 21-50	(c) 51-100	(8) 1 YR ALW PER 100 EQUIP CNTGCY	(9) DEPOT MAINT ALWPER 100 EQUIP	(10) ILLUSTRATIONS (a) FIG NO.	(b) ITEM NO. OR REFERENCE DESIGNATION
	5821-069-8928	MAINTENANCE KIT, ELECTRONIC EQUIPMENT MK-733( )/AR	EA	1	*	*	*	*	*	*	*	*		

SECTION IV INDEX-FEDERAL STOCK NUMBER & REFERENCE NUMBER CROSS-REFERENCE TO FIGURE & ITEM NUMBER

FEDERAL STOCK NUMBER	FIGURE NUMBER	ITEM NUMBER OR REF. DESIGNATION
2920-073-3260	5	A3A1A1A3
3020-073-8334	12	A3A1A4A1MP7
3020-073-8335	12	A3A1A4A1MP8
3020-073-8335	22	A3A1A7A1MP36
3020-757-2817	22	A3A1A7A1MP48
3020-757-2817	22	A3A1A7A1MP49
3020-757-2817	22	A3A1A7A1MP50
3020-757-2818	22	A3A1A7A1MP51
3020-757-2819	22	A3A1A7A1MP39
3020-757-2820	22	A3A1A7A1MP43
3020-757-2821	22	A3A1A7A1MP33
3020-757-2821	22	A3A1A7A1MP34
3020-757-2821	22	A3A1A7A1MP35
3020-758-0076	21	A3A1A7A1
3020-758-2736	22	A3A1A7A1MP38
3020-758-2737	22	A3A1A7A1MP37
3020-763-1305	22	A3A1A7A1MP44
3020-763-1305	22	A3A1A7A1MP45
3020-763-1305	22	A3A1A7A1MP46
3020-763-1306	22	A3A1A7A1MP47
3020-763-2351	2	A1A1MP2
3020-763-2352	22	A3A1A7A1MP52
3020-763-2353	22	A3A1A7A1MP53
3110-226-4277	12	A3A1A4A1MP1
3110-226-4277	12	A3A1A4A1MP2
3110-226-4277	12	A3A1A4A1MP3
3110-226-4277	12	A3A1A4A1MP4
3110-226-4277	19	A3A1A6MP1
3110-226-4277	19	A3A1A6MP2
3110-226-4277	22	A3A1A7A1MP17
3110-226-4277	22	A3A1A7A1MP18
3110-226-4277	22	A3A1A7A1MP19
3110-226-4277	22	A3A1A7A1MP20
3110-226-4277	22	A3A1A7A1MP21
3110-226-4277	22	A3A1A7A1MP22
3110-226-4277	22	A3A1A7A1MP23
3110-226-4277	22	A3A1A7A1MP24
3110-226-4277	22	A3A1A7A1MP25
3110-226-4277	22	A3A1A7A1MP26
3110-226-4277	22	A3A1A7A1MP27
3110-226-4277	22	A3A1A7A1MP28
3110-226-4277	22	A3A1A7A1MP29
3110-226-4277	22	A3A1A7A1MP30
3110-226-4277	22	A3A1A7A1MP31
3110-226-4277	22	A3A1A7A1MP32
3110-269-2274	12	A3A1A4A1MP5
3110-269-2274	12	A3A1A4A1MP6
3110-798-5463	8	A3A1A2A1A3MP1
3110-798-5463	8	A3A1A2A1A4MP1
3110-878-6499	16	A3A1A5MP1
3110-878-6499	16	A3A1A5MP2
3110-878-6499	22	A3A1A7A1MP1
3110-878-6499	22	A3A1A7A1MP10
3110-878-6499	22	A3A1A7A1MP11
3110-878-6499	22	A3A1A7A1MP12
3110-878-6499	22	A3A1A7A1MP13
3110-878-6499	22	A3A1A7A1MP14
3110-878-6499	22	A3A1A7A1MP15
3110-878-6499	22	A3A1A7A1MP16
3110-878-6499	22	A3A1A7A1MP2
3110-878-6499	22	A3A1A7A1MP3
3110-878-6499	22	A3A1A7A1MP4
3110-878-6499	22	A3A1A7A1MP5
3110-878-6499	22	A3A1A7A1MP6
3110-878-6499	22	A3A1A7A1MP7
3110-878-6499	22	A3A1A7A1MP8
3110-878-6499	22	A3A1A7A1MP9
3110-900-9618	41	A5MP1
4140-226-4258	37	A3A8A2B1001
5305-054-5635	6	A3A1A2A1A1H2
5305-054-5635	9	A3A1A3A7E1H2
5305-054-5635	11	A3A1A3A8E611H2
5305-054-5635	9	A3A1A3A9E612H2
5305-054-5635	27	A3A4E1H3
5305-054-5636	31	A3A5A3Q1501H2
5305-054-5636	31	A3A5A3Q1502H2
5305-054-5636	31	A3A5A3Q1503H2
5305-054-5637	5	A3A1A1MP4H1
5305-054-5637	5	A3A1A1MP5H1
5305-054-5637	5	A3A1A1MP6H4
5305-054-5637	38	A3A8A1A2H13
5305-054-5637	38	A3A8A1MP3H12
5305-054-5639	35	A3A7A2R211H2
5305-054-5639	38	A3A8A1J1601H2
5305-054-5640	13	A3A1A4A4H4
5305-054-5642	25	A3A1R1332H2
5305-054-5642	29	A3A4A2R1436H2
5305-054-5642	34	A3A7A3R227H2
5305-054-5642	39	A3A8A1A2E2H4
5305-054-5643	33	A3A6A3R112H2
5305-054-5644	16	A3A1A5MP3H4
5305-054-5644	4	A3A1A6MP3H4
5305-054-5646	6	A3A1A2A1H5
5305-054-5646	6	A3A1A2A2FL801H4
5305-054-5646	13	A3A1A4MP3H1
5305-054-5646	4	A3A1A7MP2H8
5305-054-5646	31	A3A5A3H4
5305-054-5646	30	A3A5C1508H2
5305-054-5646	30	A3A5T1501H2
5305-054-5646	30	A3A5T1502H2
5305-054-5646	30	A3A5T1503H2
5305-054-5647	5	A3A1A1A3H1
5305-054-5647	5	A3A1A1E10H1
5305-054-5647	5	A3A1A1S701H2
5305-054-5647	5	A3A1A1S702H2

SECTION IV INDEX-FEDERAL STOCK NUMBER & REFERENCE NUMBER CROSS-REFERENCE TO FIGURE & ITEM NUMBER (Continued)

FEDERAL STOCK NUMBER	FIGURE NUMBER	ITEM NUMBER OR REF. DESIGNATION
5305-054-5647	6	A3A1A2A2E6H3
5305-054-5647	7	A3A1A2MP3H2
5305-054-5647	37	A3A8A2A2H2
5305-054-5647	37	A3A8A2FL1001H2
5305-054-5647	37	A3A8A2FL1002H2
5305-054-5648	2	A1MP11H1
5305-054-5648	2	A1MP18H4
5305-054-5648	12	A3A1A4A2H2
5305-054-5648	12	A3A1A4A3H2
5305-054-5649	5	A3A1A1MP1H4
5305-054-5649	6	A3A1A2A2E5H1
5305-054-5649	7	A3A1A2A2XV803H1
5305-054-5650	5	A3A1A1W1H2
5305-054-5650	16	A3A1A5A2H2
5305-054-5650	2	A1J101H3
5305-054-5651	5	A3A1A1E1H4
5305-059-7189	24	A3A2P1205H2
5305-059-8229	36	A3A8MP2H1
5305-059-8436	40	A4MP2H4
5305-059-8447	36	A3A8MP3H1
5305-071-1317	19	A3A1A6A2H2
5305-073-3280	12	A3A1A4A1A3H3
5305-079-6349	2	A1MP6H2
5305-079-6349	2	A1MP7H1
5305-079-6349	2	A1MP8H1
5305-206-2994	2	A1A1MP2H2
5305-207-7466	4	A3A1A2H3
5305-207-7466	4	A3A1A4H2
5305-207-7468	4	A3A1A5H3
5305-637-5884	4	A3A1A1H2
5305-637-5884	4	A3A1A3H2
5305-676-8108	33	A3A6H1
5305-676-8146	23	A3A2H1
5305-676-8146	25	A3A3H1
5305-676-8146	27	A3A4H1
5305-676-8146	32	A3A5H1
5305-685-7329	8	A3A1A2A1MP3H2
5305-685-7329	8	A3A1A2A1MP4H2
5305-717-8834	2	A1MP12H2
5305-718-9459	36	A3A8J1003H2
5305-718-9459	36	A3A8J1007H2
5305-718-9459	40	A4J1008H2
5305-727-8833	8	A3A1A2MP1H4
5305-727-8833	9	A3A1A3A5J601H2
5305-727-8833	11	A3A1A3A5K601H2
5305-727-8833	4	A3A1A4MP1H4
5305-727-8833	13	A3A1A4W2H2
5305-762-7482	6	A3A1A2A2E8H2
5305-762-7482	4	A3A1A3A2H4
5305-762-7482	9	A3A1A3A3H5
5305-762-7482	9	A3A1A3A4H1
5305-762-7482	9	A3A1A3A6H1
5305-762-7482	9	A3A1A3A7H1
5305-762-7482	9	A3A1A3A8H1
5305-762-7482	9	A3A1A3A9H3
5305-762-7482	12	A3A1A4A2H1
5305-762-7482	12	A3A1A4A3H3
5305-762-7482	12	A3A1A4E1L4H2
5305-763-3356	14	A3A1A4E1H1
5305-763-3356	16	A3A1A5J402H1
5305-763-3356	19	A3A1A6J302H1
5305-763-3356	34	A3A7MP1H2
5305-763-3356	37	A3A8A2MP6H4
5305-763-3356	36	A3A8J1001H2
5305-763-3356	36	A3A8MP1H2
5305-763-3357	37	A3A8A2R1007H2
5305-763-3357	36	A3A8J1002H2
5305-763-3357	36	A3A8J1004H2
5305-763-3357	36	A3A8J1005H2
5305-763-6955	4	A3A1A3H3
5305-763-7822	2	A1MP11H1
5305-763-7822	2	A1MP14H2
5305-763-7822	2	A1MP15H2
5305-763-7822	22	A3A1A7A1A1MP2H9
5305-763-7822	21	A3A1A7E1H3
5305-763-7822	32	A3A5K1501H2
5305-763-7822	37	A3A8A2MP3H4
5305-763-7827	4	A3A1A2H3
5305-763-7827	4	A3A1A4H3
5305-763-7827	4	A3A1A6H4
5305-763-7828	4	A3A1A1H3
5305-764-0071	3	A3A1H5
5305-764-2964	1	A2MP2H2
5305-764-2966	21	A3A1A7W1H2
5305-764-2966	32	A3A5A4H4
5305-764-2966	31	A3A5E2H8
5305-764-2966	37	A3A8A2E4H11
5305-764-2966	37	A3A8A2E5H1
5305-764-2966	36	A3A8J1003H2
5305-764-2966	36	A3A8J1006H2
5305-764-2966	36	A3A8J1007H2
5305-770-2533	2	A1MP16H20
5305-770-2533	12	A3A1A4MP2H1
5305-770-2579	2	A1A1H4
5305-770-2579	27	A3A4P1401H2
5305-770-2579	31	A3A5MP1H2
5305-770-2579	30	A3A5W1H2
5305-770-2579	33	A3A6P101H2
5305-770-2579	34	A3A7P201H2
5305-770-2579	26	A3A3P1301H2
5305-889-3118	6	A3A1A2A1A1E2H2
5305-899-1962	5	A3A1A1MP2H2
5305-899-1962	5	A3A1A1MP3H2
5305-954-3938	21	A3A1A7W1H2
5305-988-1167	9	A3A1A3A3H4
5305-988-1167	9	A3A1A3A4H2
5305-988-1167	9	A3A1A3A6H2
5305-988-1167	9	A3A1A3A7H2
5305-988-1167	9	A3A1A3A8H2
5305-988-1168	5	A3A1A1B701H2
5305-990-8386	6	A3A1A2A1A1E3H1

FEDERAL STOCK NUMBER	FIGURE NUMBER	ITEM NUMBER OR REF. DESIGNATION
5305-990-8386	6	A3A1A2A2E7H6
5307-687-6888	6	A3A1A2H2
5310-042-9609	2	A1MP11H1
5310-042-9609	2	A1MP18H4
5310-042-9609	12	A3A1A4MP2H1
5310-042-9609	30	A3A5T1501H2
5310-042-9609	30	A3A5T1502H2
5310-042-9609	30	A3A5T1503H2
5310-042-9609	30	A3A5W1H1
5310-042-9609	36	A3A8MP3H11
5310-058-2950	5	A3A1A1MP4H1
5310-058-2950	5	A3A1A1MP5H1
5310-058-2950	21	A3A1A7W1H2
5310-058-2950	38	A3A8A1MP3H12
5310-058-2950	36	A3A8J1002H2
5310-058-2950	36	A3A8J1004H2
5310-058-2950	36	A3A8J1005H2
5310-058-2950	36	A3A8MP2H1
5310-058-2950	40	A4J1008H2
5310-058-2950	40	A4MP2H4
5310-058-2951	16	A3A1A5H1
5310-058-2951	19	A3A1A6H2
5310-058-2951	31	A3A5A3E3H3
5310-088-0551	32	A3A5K1501H2
5310-088-0551	30	A3A5W1H2
5310-198-3614	37	A3A8A2K1002H2
5310-209-0960	7	A3A1A2MP3H2
5310-261-7160	2	A1R101H1
5310-261-7352	6	A3A1A2A1A1E2H2
5310-261-7352	6	A3A1A2A2E7H6
5310-261-7352	4	A3A1A3A2H4
5310-261-7352	9	A3A1A3A3H9
5310-261-7352	9	A3A1A3A4H3
5310-261-7352	9	A3A1A3A6H3
5310-261-7352	9	A3A1A3A7H3
5310-261-7352	9	A3A1A3A8H3
5310-261-7352	9	A3A1A3A9H3
5310-261-7352	12	A3A1A4E14H2
5310-270-8810	31	A3A5A3E3H3
5310-271-4640	5	A3A1A1MP6H4
5310-271-4640	11	A3A1A3A5K601H2
5310-271-4640	13	A3A1A4W2H2
5310-271-4640	26	A3A1A1332H2
5310-271-4640	28	A3A4A2R1436H2
5310-271-4640	33	A3A6A3R112H2
5310-271-4640	34	A3A7A2R211H2
5310-271-4640	35	A3A7A3R227H2
5310-271-4640	34	A3A7MP1H2
5310-271-4640	38	A3A8A1A1H4
5310-271-4640	38	A3A8A1J1601H4
5310-271-4640	36	A3A8J1001H2
5310-271-4640	36	A3A8J1002H2
5310-271-4640	36	A3A8J1004H2
5310-271-4640	36	A3A8J1005H2
5310-271-4640	36	A3A8MP1H2
5310-271-4642	2	A1J101H3
5310-271-4642	5	A3A1A1E1H4
5310-271-4642	5	A3A1A1K703H2
5310-271-4642	5	A3A1A1W1H2
5310-271-4642	6	A3A1A2A2FL801H4
5310-271-4642	27	A3A4K1401H2
5310-271-4642	34	A3A7A2K201H4
5310-271-4642	37	A3A8A2K1001H2
5310-271-4642	37	A3A8A2MP6H4
5310-275-0889	2	A1A1H6
5310-275-0889	12	A3A1A4MP2H1
5310-275-0889	26	A3A1K1301H2
5310-275-0889	34	A3A7A3T201H4
5310-281-9845	2	A1A1H2
5310-281-9845	2	A1A1S103EH2
5310-285-7085	23	A3A2P1205H2
5310-285-7085	27	A3A4P1401H2
5310-285-7085	33	A3A6P101H2
5310-285-7085	35	A3A7P201H2
5310-285-7085	26	A3A3P1301H2
5310-543-2740	37	A3A8A2H2
5310-543-2740	37	A3A8A2R1001H1
5310-559-7792	2	A1J101H4
5310-559-7792	5	A3A1A1E10H1
5310-559-7792	6	A3A1A2A2E6H3
5310-595-7154	2	A1S101H1
5310-595-7154	2	A1S102H1
5310-595-7468	1	A3MP2H2
5310-631-1302	2	A1J101H1
5310-687-7740	6	A3A1A2A1A1E2H2
5310-721-3261	34	A3A7CR208H1
5310-721-3343	37	A3A8A2CR1002H2
5310-722-5652	5	A3A1A1B701H2
5310-722-5652	9	A3A1A3A7E1H2
5310-722-5652	11	A3A1A3A8E611H2
5310-722-5652	9	A3A1A3A9E612H2
5310-766-3369	36	A3A8J1006H2
5310-934-9765	37	A3A8A2CR1002H1
5315-702-9651	22	A3A1A7A1A1H1
5315-758-0116	8	A3A1A2A1A3MP2
5315-758-0116	9	A3A1A2A1A4MP2
5315-825-1207	12	A3A1A4A1A3H1
5315-844-5644	37	A3A8A2A3MP3
5320-587-3704	5	A3A1A1A1MP2H1
5320-721-5242	27	A3A4A3MP1H2
5325-185-0017	37	A3A8A2H1
5325-286-6047	6	A3A1A2A2H1
5325-286-6047	38	A3A8A1H2
5325-639-0563	3	A3A9MP2
5330-580-1726	2	A1MP5
5340-200-5234	8	A3A1A2A1H2
5340-282-0782	19	A3A1A6H1

SECTION IV INDEX-FEDERAL STOCK NUMBER & REFERENCE NUMBER CROSS-REFERENCE TO FIGURE & ITEM NUMBER (Continued)

FEDERAL STOCK NUMBER	FIGURE NUMBER	ITEM NUMBER OR REF. DESIGNATION
5340-548-0169	37	A3A8A2MP2
5340-584-6620	12	A3A1A4A1A3H2
5340-598-0383	2	A1MP2
5340-598-1048	8	A3A1A2A1A1H1
5340-619-7754	36	A3A8MP1
5340-660-0968	41	A5MP41
5340-695-2558	3	A3A1H5
5340-721-4845	31	A3A5A1MP2
5340-802-4706	2	A1MP3
5340-833-4234	2	A1MP1
5340-865-5348	19	A3A1A6MP9
5340-894-0686	5	A3A1A1A1MP2
5340-903-7567	8	A3A1A2A1H1
5340-931-3129	16	A3A1A5MP9
5340-985-6642	8	A3A1A2A1MP5
5355-073-8482	5	A3A1A1MP5
5 355-073-8483	36	A3A8MP2
5355-073-8564	5	A3A1A1MP4
5355-728-3157	2	A1MP6
5355-758-0115	2	A1MP7
5355-758-0115	2	A1MP8
5355-965-4900	2	A1MP10
5355-965-4900	2	A1MP9
5821-073-3184	36	A3A8J1003H2
5821-073-3185	36	A3A8J1007H2
5821-073-3261	5	A3A1A1A2
5821-073-5388	12	A3A1A4A1A1
5821-073-9275	12	A3A1A4A1A3
5821-083-3990	1	A5
5821-221-4195	19	A3A1A6A2
5821-226-4194	4	A3A1A6
5821-226-4196	34	A3A7A2
5821-226-4197	33	A3A6A3
5821-226-4198	33	A3A6A2
5821-226-4199	19	A3A1A6A1
5821-226-4261	13	A3A1A4A4
5821-226-4262	4	A3A1A4
5821-226-4263	12	A3A1A4A2
5821-226-4264	34	A3A7A3
5821-226-4267	12	A3A1A4A3
5821-226-4273	38	A3A8A1A2
5821-226-4274	38	A3A8A1A1
5821-226-7536	12	A3A1A4A1MP10
5821-226-7536	12	A3A1A4A1MP9
5821-719-4973	4	A3A1A3A1
5821-719-4976	4	A3A1A3MP1
5821-719-5413	27	A3A4A3
5821-719-5431	2	A1MP12
5821-721-3273	9	A3A1A3A3
5821-728-3122	26	A3A3A2
5821-728-3123	16	A3A1A5A1
5821-728-3172	23	A3A2A2
5821-728-3175	30	A3A5A2
5821-728-3224	4	A3A1A7
5821-728-3253	16	A3A1A5A2
5821-728-3254	3	A3A5
5821-728-3274	6	A3A1A2A1
5821-728-3641	4	A3A1A3
5821-728-3642	4	A3A1A2
5821-728-3650	27	A3A4A2
5821-728-3653	26	A3A3A1
5821-728-3653	3	A3A4
5821-728-3654	23	A3A2A3
5821-730-2633	4	A3A1A5
5821-733-5690	3	A3A3
5821-757-2793	8	A3A1A2A1A3
5821-757-2793	8	A3A1A2A1A4
5821-757-2794	8	A3A1A2A1A3MP3
5821-757-2794	8	A3A1A2A1A4MP3
5821-757-2796	8	A3A1A2A1MP1
5821-757-2798	8	A3A1A2A1MP3
5821-757-2798	8	A3A1A2A1MP4
5821-757-2799	3	A3A2
5821-757-2800	22	A3A1A7A1MP40
5821-757-2800	22	A3A1A7A1MP41
5821-757-2803	2	A1A1MP3
5821-757-2804	2	A1A1MP1
5821-758-0060	22	A3A1A7A1MP42
5821-764-5384	3	A3A6
5821-790-7562	16	A3A1A5MP5
5821-833-5846	21	A3A1A7MP3
5821-871-8537	41	A5H1
5821-871-8538	41	A5MP9
5821-891-9427	37	A3A8A2A3
5821-891-9441	5	A3A1A1E1
5821-891-9485	5	A3A1A1MP2
5821-891-9485	5	A3A1A1MP3
5821-892-9309	1	A2
5821-937-4687	1	A5
5905-080-5899	35	A3A7A2R229
5905-171-2005	24	A3A2A3R1231
5905-171-2005	24	A3A2A3R1243
5905-192-3972	29	A3A4A2R1432
5905-192-3972	33	A3A6A2R124
5905-195-6800	25	A3A3A1R1326
5905-195-6800	25	A3A3A2R1325
5905-245-0023	7	A3A1A2A2R807
5905-247-9329	30	A3A5A2R1501
5905-249-4248	30	A3A5A2R1510
5905-279-1739	30	A3A5A2R1512
5905-279-1756	7	A3A1A2A2R806
5905-279-1876	30	A3A5A2R1511

FEDERAL STOCK NUMBER	FIGURE NUMBER	ITEM NUMBER OR REF. DESIGNATION
5905-299-2004	30	A3A5A2R1513
5905-299-2004	30	A3A5A2R1514
5905-500-7272	7	A3A1A2A2R808
5905-543-0407	25	A3A3A1RT1301
5905-642-0474	20	A3A1A6A1R303
5905-681-6462	14	A3A1A4A2R510
5905-681-8855	7	A3A1A2A2R811
5905-681-8958	36	A3A8A3R1002
5905-681-8958	36	A3A8A3R1005
5905-681-9970	10	A3A1A3A3R615
5905-681-9970	10	A3A1A3A3R621
5905-681-9970	14	A3A1A4A2R523
5905-681-9970	15	A3A1A4A3R507
5905-681-9970	26	A3A3A1R1308
5905-681-9970	26	A3A3A1R1339
5905-681-9970	27	A3A4R1435
5905-682-1101	24	A3A2A3R1235
5905-682-4098	14	A3A1A4A2R505
5905-682-4098	17	A3A1A5A1R401
5905-682-4098	20	A3A1A6A1R302
5905-682-4098	24	A3A2A2R1203
5905-682-4098	24	A3A2A2R1208
5905-682-4098	24	A3A2A3R1241
5905-682-4098	33	A3A6A3R114
5905-682-4098	35	A3A7A3R222
5905-682-4106	39	A3A8A1A2R1601
5905-682-4106	39	A3A8A1A2R1602
5905-682-4222	33	A3A6A2R130
5905-683-2235	14	A3A1A4A2R504
5905-683-2235	14	A3A1A4A2R515
5905-683-2235	26	A3A3A2R1321
5905-683-2238	10	A3A1A3A3R612
5905-683-2238	10	A3A1A3A3R614
5905-683-2238	10	A3A1A3A3R617
5905-683-2238	10	A3A1A3A3R618
5905-683-2238	10	A3A1A3A3R624
5905-683-2238	14	A3A1A4A2R521
5905-683-2238	14	A3A1A4A2R525
5905-683-2238	14	A3A1A4A2R518
5905-683-2238	15	A3A1A4A3R513
5905-683-2238	33	A3A6A3R116
5905-683-2240	14	A3A1A4A2R501
5905-683-2243	14	A3A1A4A2R508
5905-683-2243	17	A3A1A5A1R406
5905-683-2246	14	A3A1A4A2R519
5905-683-2246	17	A3A1A5A1R405
5905-683-7720	29	A3A4A2R1401
5905-683-7721	10	A3A1A3A3R625
5905-683-7721	29	A3A4A2R1414
5905-683-7723	29	A3A4A2R1416
5905-683-7723	27	A3A4R1433
5905-686-3369	28	A3A4A2R1431
5905-686-3798	29	A3A4A2R1403
5905-686-3838	2	A1R102
5905-686-3838	7	A3A1A2A2R809
5905-686-3838	10	A3A1A3A3R616
5905-686-3838	10	A3A1A3A3R626
5905-686-3838	17	A3A1A5A1R403
5905-686-3903	28	A3A4A2R1404
5905-686-4527	26	A3A3A1R1305
5905-686-4527	33	A3A6A2R101
5905-686-4527	33	A3A6A3R122
5905-686-4528	11	A3A1A3A7R609
5905-686-4528	24	A3A2A2R1205
5905-686-4528	24	A3A2A2R1209
5905-686-4528	24	A3A2A3R1223
5905-686-4528	24	A3A2A3R1236
5905-686-4528	25	A3A3A1R1333
5905-686-4528	29	A3A4A2R1425
5905-686-4528	33	A3A6A3R117
5905-686-4529	7	A3A1A2A2R803
5905-686-4529	7	A3A1A2A2R813
5905-686-4529	20	A3A1A6A1R304
5905-686-4529	24	A3A2A3R1225
5905-686-4529	24	A3A2A3R1226
5905-686-4529	24	A3A2A3R1227
5905-686-4529	28	A3A4A2R1407
5905-686-4530	25	A3A3A1R1307
5905-686-4530	26	A3A3A1R1329
5905-686-4530	25	A3A3A1R1336
5905-686-4530	25	A3A3A1R1337
5905-686-4530	25	A3A3A1R1338
5905-686-4531	25	A3A3A1R1328
5905-686-9997	10	A3A1A3A3R613
5905-686-9997	11	A3A1A3A7R607
5905-686-9997	11	A3A1A3A8R603
5905-686-9997	14	A3A1A4A2R503
5905-686-9997	14	A3A1A4A2R516
5905-686-9997	24	A3A2A3R1218
5905-686-9997	24	A3A2A3R1220
5905-686-9997	24	A3A2A3R1222
5905-686-9997	24	A3A2A3R1240
5905-686-9997	25	A3A3A1R1303
5905-686-9997	26	A3A3A1R1306
5905-686-9997	25	A3A3A1R1311
5905-686-9997	25	A3A3A1R1312
5905-686-9997	28	A3A4A2R1408
5905-686-9997	29	A3A4A2R1411
5905-686-9997	29	A3A4A2R1427
5905-686-9997	33	A3A6A2R103
5905-686-9997	33	A3A6A2R127
5905-686-9997	33	A3A6A3R115
5905-686-9997	33	A3A6A3R135
5905-686-9998	10	A3A1A3A3R620
5905-686-9998	10	A3A1A3A3R627
5905-686-9998	14	A3A1A4A2R506
5905-686-9998	14	A3A1A4A2R509
5905-686-9998	14	A3A1A4A2R522
5905-686-9998	28	A3A4A2R1410
5905-686-9998	29	A3A4A2R1426
5905-687-0000	26	A3A3A1R1313

FEDERAL STOCK NUMBER	FIGURE NUMBER	ITEM NUMBER OR REF. DESIGNATION
5905-687-0000	26	A3A3A1R1314
5905-687-0000	25	A3A3A2R1316
5905-687-0000	25	A3A3A2R1317
5905-687-0000	38	A3A8A1A1R1607
5905-688-3475	7	A3A1A2A2R812
5905-688-3738	10	A3A1A3A3R628
5905-688-4447	7	A1A1A2A2R801
5905-688-4447	24	A3A2A3R1238
5905-688-4447	26	A3A3A1R1302
5905-688-4447	28	A3A4A2R1422
5905-688-4447	36	A3A8A3R1003
5905-691-0195	10	A3A1A3A3R619
5905-691-0195	10	A3A1A3A3R623
5905-691-0195	14	A3A1A4A2R512
5905-691-0195	14	A3A1A4A2R514
5905-691-0195	14	A3A1A4A2R520
5905-691-0195	14	A3A1A4A2R526
5905-691-0195	25	A3A3A2R1318
5905-691-0195	26	A3A3A2R1320
5905-691-0195	26	A3A3A2R1327
5905-723-5251	10	A3A1A3A3R622
5905-723-5251	14	A3A1A4A2R524
5905-723-5251	17	A3A1A5A1R404
5905-725-6995	7	A3A1A2A2R802
5905-725-6995	25	A3A3A2R1324
5905-725-6995	29	A3A4A2R1409
5905-726-4413	17	A3A1A5A1R402
5905-726-4413	25	A3A3A1R1310
5905-726-5340	25	A3A3A1R1304
5905-726-5340	35	A3A7A3R203
5905-726-5343	24	A3A2A2R1201
5905-726-5343	24	A3A2A2R1206
5905-726-5343	24	A3A2A2R1210
5905-726-5343	24	A3A2A2R1211
5905-726-5343	24	A3A2A2R1215
5905-726-5343	23	A3A2A3R1221
5905-726-5343	25	A3A3A2R1323
5905-726-5343	35	A3A7A3R218
5905-726-5343	35	A3A7A3R225
5905-726-5344	24	A3A2A2R1213
5905-726-5344	26	A3A3A1R1330
5905-726-5344	35	A3A7A2R209
5905-726-5346	24	A3A2A2R1212
5905-726-5346	35	A3A7A2R210
5905-726-6433	20	A3A1A6A1R305
5905-726-6433	24	A3A2A2R1214
5905-726-6433	24	A3A2A3R1234
5905-726-6433	28	A3A4A2R1421
5905-726-6433	30	A3A5A2R1504
5905-726-6433	33	A3A6A2R132
5905-726-6433	33	A3A6A2R133
5905-726-6433	33	A3A6A2R134
5905-726-6433	33	A3A6A3R118
5905-726-6433	33	A3A6A3R119
5905-726-6433	33	A3A6A3R121
5905-726-6433	35	A3A7A2R208
5905-726-6435	2	A1R103
5905-726-6435	24	A3A2A2R1204
5905-726-6435	24	A3A2A2R1216
5905-725-6435	25	A3A3A1R1331
5905-726-6435	35	A3A7A3R201
5905-726-6435	35	A3A7A3R202
5905-726-6435	35	A3A7A3R216
5905-726-6436	24	A3A2A2R1244
5905-726-6436	24	A3A2A3R1233
5905-726-6436	24	A3A2A3R1242
5905-726-6436	25	A3A3A1R1301
5905-726-6436	26	A3A3A1R1334
5905-726-6436	26	A3A3A1R1335
5905-726-6436	26	A3A3A1R1341
5905-726-6436	35	A3A7A3R214
5905-726-6436	36	A3A8A3R1004
5905-726-6441	13	A3A1A4A4R502
5905-726-6441	24	A3A2A2R1217
5905-726-6441	24	A3A2A3R1230
5905-726-6441	25	A3A3A2R1322
5905-726-6441	33	A3A6A2R126
5905-726-6441	33	A3A6A2R128
5905-726-6834	11	A3A1A3A6R602
5905-726-6834	11	A3A1A3A8R606
5905-726-6834	29	A3A4A2R1406
5905-726-6834	28	A3A4A2R1419
5905-726-6834	28	A3A4A2R1423
5905-726-6836	20	A3A1A6A1R301
5905-726-8451	32	A3A5R1502
5905-726-8451	32	A3A5R1503
5905-728-6153	35	A3A7A2R230
5905-752-3156	7	A3A1A2A2R805
5905-752-3156	11	A3A1A3A9R611
5905-752-3156	24	A3A2A3R1219
5905-752-3156	24	A3A2A3R1232
5905-752-3156	29	A3A4A2R1418
5905-752-3156	28	A3A4A2R1424
5905-752-3158	28	A3A4A2R1412
5905-752-3335	24	A3A2A3R1228
5905-752-3336	33	A3A6A3R120
5905-752-3338	11	A3A1A3A6R601
5905-752-3338	11	A3A1A3A8R605
5905-752-3338	24	A3A2A2R1202
5905-752-3338	24	A3A2A2R1207
5905-752-3338	24	A3A2A3R1237
5905-752-3338	24	A3A2A3R1239
5905-752-3338	35	A3A7A2R213
5905-752-3338	35	A3A7A3R217
5905-752-3338	36	A3A8A3R1006
5905-752-3340	33	A3A6A2R102
5905-752-3340	33	A3A6A2R105
5905-752-3340	35	A3A7A3R226
5905-752-3340	35	A3A7A3R228
5905-755-0796	33	A3A6A2R123
5905-755-8389	33	A3A6A2R104

SECTION IV INDEX-FEDERAL STOCK NUMBER & REFERENCE NUMBER CROSS-REFERENCE TO FIGURE & ITEM NUMBER (Continued)

FEDERAL STOCK NUMBER	FIGURE NUMBER	ITEM NUMBER OR REF. DESIGNATION
5905-761-3921	31	A3A5A3R1508
5905-761-3921	31	A3A5A3R1509
5905-762-2557	2	A1R101
5905-779-8378	33	A3A6A3R113
5905-781-4857	33	A3A6A3R109
5905-800-0179	25	A3A3A1R1309
5905-802-6730	14	A3A1A4A2R511
5905-802-6730	35	A3A7A2R207
5905-805-9713	28	A3A4A2R1417
5905-806-0633	2	A1R104
5905-808-6135	9	A3A1A3R629
5905-808-6135	20	A3A1A6A1R307
5905-808-6135	38	A3A8A1A1R1603
5905-808-6135	38	A3A8A1A1R1606
5905-810-8135	35	A3A7A2R206
5905-811-0674	28	A3A4A2R1405
5905-816-8554	11	A3A1A3A7R608
5905-816-8554	11	A3A1A3A8R604
5905-816-8554	11	A3A1A3A9R610
5905-816-8554	24	A3A2A3R1224
5905-816-8554	29	A3A4A2R1415
5905-816-8554	28	A3A4A2R1420
5905-816-8554	33	A3A6A2R125
5905-816-8554	33	A3A6A2R131
5905-816-8554	35	A3A7A3R204
5905-816-8554	35	A3A7A3R212
5905-816-8554	35	A3A7A3R215
5905-816-8554	35	A3A7A3R221
5905-817-6440	21	A3A1A7R901
5905-817-7971	26	A3A3A2R1319
5905-825-2360	24	A3A2A3R1229
5905-834-9874	20	A3A1A6A1R306
5905-834-9874	28	A3A4A2R1428
5905-834-9874	29	A3A4A2R1429
5905-834-9874	29	A3A4A2R1430
5905-834-9874	33	A3A6A2R129
5905-834-9874	35	A3A7A3R219
5905-834-9874	38	A3A8A1A1R1604
5905-834-9874	38	A3A8A1A1R1605
5905-843-6408	37	A3A8A2R1007
5905-883-3718	30	A3A5A2R1515
5905-884-1610	26	A3A3A1R1332
5905-889-0010	31	A3A5A3R1506
5905-889-0010	31	A3A5A3R1507
5905-890-9728	35	A3A7A3R224
5905-951-8105	32	A3A5R1505
5905-952-2144	33	A3A6A3R107
5905-969-5844	14	A3A1A4A2R517
5905-975-1144	7	A3A1A2A2R815
5905-834-9874	33	A3A6A3R108
5905-979-3856	33	A3A6A3R110
5905-979-3856	33	A3A6A3R112
5905-979-3856	35	A3A7A3R227
5905-982-3336	7	A3A1A2A2R814
5905-985-5466	33	A3A6A3R106
5905-985-5685	37	A3A8A2R1001
5905-993-5147	26	A3A3A1R1315
5905-993-6001	33	A3A6A3R111
5910-027-2761	17	A3A1A5A1L406
5910-045-5315	23	A3A2A2C1202
5910-045-5315	23	A3A2A2C1207
5910-045-5315	23	A3A2A2C1210
5910-045-5434	26	A3A3A2C1312
5910-051-4610	17	A3A1A5A1C434
5910-051-4610	38	A3A8A1C1607
5910-051-7305	38	A3A8A1C1608
5910-057-4306	25	A3A3A1C1316
5910-057-4306	28	A3A4A2C1402
5910-056-8628	30	A3A5A2C1506
5910-060-1187	17	A3A1A5A1C405
5910-060-1187	17	A3A1A5A1C406
5910-060-1190	34	A3A7A3C212
5910-060-1191	34	A3A7A3C211
5910-060-9465	38	A3A8A1C1604
5910-060-9465	38	A3A8A1C1618
5910-062-3965	38	A3A8A1C1602
5910-067-7293	17	A3A1A5A1C409
5910-068-1332	38	A3A8A1C1614
5910-068-1332	39	A3A8A1C1627
5910-068-1332	39	A3A8A1C1628
5910-071-1642	23	A3A2A3C1222
5910-082-4616	10	A3A1A3A3C630
5910-082-4616	10	A3A1A3A3C631
5910-082-4616	10	A3A1A3A3C641
5910-082-4616	10	A3A1A3A3C642
5910-082-4816	29	A3A4A2C1410
5910-082-4893	28	A3A4A2C1409
5910-082-4893	28	A3A4A2C1412
5910-082-4893	29	A3A4A2C1414
5910-087-8958	34	A3A7A2C217
5910-087-9711	31	A3A5A3C1502
5910-087-9711	31	A3A5A3C1503
5910-583-4709	11	A3A1A3A6C611
5910-583-4709	11	A3A1A3A8C613
5910-649-7756	6	A3A1A2A1A1C804
5910-649-7756	6	A3A1A2A1A1C812
5910-649-7756	6	A3A1A2A1A1C816

FEDERAL STOCK NUMBER	FIGURE NUMBER	ITEM NUMBER OR REF. DESIGNATION
5910-683-7114	17	A3A1A5A1C401
5910-683-7157	11	A3A1A3A4C604
5910-683-7157	11	A3A1A3A6C608
5910-683-7157	11	A3A1A3A7C621
5910-683-7157	11	A3A1A3A8C616
5910-683-7157	11	A3A1A3A9C626
5910-686-6126	14	A3A1A4A2C506
5910-689-8750	34	A3A7A3C213
5910-710-0022	14	A3A1A4A2C501
5910-710-0022	14	A3A1A4A2C507
5910-710-0022	14	A3A1A4A2C515
5910-710-0022	14	A3A1A4A2C516
5910-710-0022	14	A3A1A4A2C517
5910-710-0022	14	A3A1A4A2C520
5910-710-0022	14	A3A1A4A2C521
5910-710-0022	14	A3A1A4A2C522
5910-710-0022	14	A3A1A4A2C535
5910-710-0022	14	A3A1A4A2C536
5910-710-0022	14	A3A1A4A2C537
5910-710-0022	14	A3A1A4A2C538
5910-710-0022	14	A3A1A4A2C539
5910-710-0022	29	A3A4A2C1420
5910-717-3541	38	A3A8A1C1617
5910-717-3555	38	A3A8A1C1603
5910-717-5853	14	A3A1A4A2C532
5910-717-5853	23	A3A2A3C1216
5910-717-5853	23	A3A2A3C1229
5910-717-5853	34	A3A7A3C208
5910-728-4093	29	A3A4A2C1417
5910-728-4094	28	A3A4A2C1419
5910-728-4095	10	A3A1A3A3C634
5910-728-4095	10	A3A1A3A3C636
5910-728-4095	10	A3A1A3A3C638
5910-728-4095	10	A3A1A3A3C640
5910-731-9657	9	A3A1A3C601
5910-731-9659	8	A3A1A2A1C805A-C
5910-771-9090	25	A3A3A2C1313
5910-775-3666	29	A3A4A2C1401
5910-781-1154	29	A3A4A2C1418
5910-781-6497	38	A3A8A1A1C1625
5910-781-6497	38	A3A8A1A1C1626
5910-781-6497	38	A3A8A1C1615
5910-802-1499	14	A3A1A4A2C534
5910-804-2369	14	A3A1A4A2C533
5910-804-2394	28	A3A4A2C1413
5910-811-4783	7	A3A1A2A2C819
5910-811-4783	17	A3A1A5A1C402
5910-811-4783	17	A3A1A5A1C410
5910-811-4783	17	A3A1A5A1C411
5910-811-4783	17	A3A1A5A1C412
5910-811-4783	17	A3A1A5A1C413
5910-811-4783	20	A3A1A6A1C301
5910-811-4783	20	A3A1A6A1C302
5910-811-4783	20	A3A1A6A1C303
5910-811-4783	20	A3A1A6A1C307
5910-811-4783	20	A3A1A6A1C308
5910-811-4783	21	A3A1A7C901
5910-811-4783	21	A3A1A7C902
5910-811-4783	21	A3A1A7C903
5910-811-4783	21	A3A1A7C904
5910-811-4783	21	A3A1A7C905
5910-811-4783	21	A3A1A7C906
5910-811-4783	34	A3A7A2C202
5910-811-4783	34	A3A7A2C203
5910-811-4783	34	A3A7A2C204
5910-811-4783	34	A3A7A2C205
5910-811-4783	39	A3A8A1C1629
5910-811-4783	39	A3A8A1C1630
5910-811-4783	39	A3A8A1C1631
5910-812-8613	20	A3A1A6A1C306
5910-823-1347	23	A3A2A2C1213
5910-823-1347	25	A3A3A1C1301
5910-823-1347	25	A3A3A1C1303
5910-823-1347	25	A3A3A1C1317
5910-823-1347	26	A3A3A1C1318
5910-823-1347	26	A3A3A1C1319
5910-823-1347	25	A3A3A2C1320
5910-823-1347	33	A3A6A2C101
5910-823-1347	33	A3A6A2C111
5910-823-1347	33	A3A6A2C112
5910-823-1347	33	A3A6A2C114
5910-823-1347	33	A3A6A2C115
5910-823-1347	33	A3A6A3C103
5910-823-1347	33	A3A6A3C105
5910-823-1347	38	A3A8A1A1C1622
5910-823-1657	31	A3A5C1501
5910-825-3067	17	A3A1A5A1C403
5910-825-3067	38	A3A8A1C1613
5910-829-2996	27	A3A4C1423
5910-829-2996	30	A3A5A2C1504
5910-835-0718	15	A3A1A4A3C502
5910-835-0718	15	A3A1A4A3C508
5910-835-0718	15	A3A1A4A3C512
5910-835-0718	15	A3A1A4A3C518
5910-835-0718	15	A3A1A4A3C525

SECTION IV INDEX-FEDERAL STOCK NUMBER & REFERENCE NUMBER CROSS-REFERENCE TO FIGURE & ITEM NUMBER (Continued)

FEDERAL STOCK NUMBER	FIGURE NUMBER	ITEM NUMBER OR REF. DESIGNATION
5910-835-0718	15	A3A1A4A3C529
5910-837-2577	7	A3A1A2A2C801
5910-837-2577	7	A3A1A2A2C802
5910-837-2577	7	A3A1A2A2C803
5910-837-2577	7	A3A1A2A2C807
5910-837-2577	7	A3A1A2A2C809
5910-837-2577	7	A3A1A2A2C810
5910-837-2577	7	A3A1A2A2C814
5910-837-2577	7	A3A1A2A2C815
5910-837-2577	7	A3A1A2A2C820
5910-837-2577	7	A3A1A2A2C821
5910-837-2577	38	A3A8A1A1C1620
5910-837-2577	38	A3A8A1A1C1621
5910-837-2577	38	A3A8A1A1C1623
5910-837-2577	38	A3A8A1A1C1624
5910-838-8947	6	A3A1A2A1A1C806
5910-838-8947	6	A3A1A2A1A1C811
5910-838-8947	6	A3A1A2A1A1C817
5910-849-7568	36	A3A8C1001
5910-850-1501	28	A3A4A2C1411
5910-850-6216	38	A3A8A1A2C1610
5910-850-6216	38	A3A8A1C1612
5910-851-6714	28	A3A4A2C1421
5910-880-6080	26	A3A3A2C1314
5910-881-8946	34	A3A7A3C206
5910-881-8946	36	A3A8A3C1002
5910-881-8946	36	A3A8A3C1003
5910-881-8946	36	A3A8A3C1004
5910-881-8946	36	A3A8A3C1005
5910-883-8116	23	A3A2A3C1230
5910-883-8116	23	A3A2A3C1232
5910-883-8116	26	A3A3A1C1302
5910-883-8116	26	A3A3A2C1308
5910-883-8116	25	A3A3A2C1311
5910-889-4503	23	A3A2A3C1227
5910-889-4503	26	A3A3A2C1306
5910-889-4503	25	A3A3A2C1307
5910-889-4503	25	A3A3A2C1310
5910-889-4503	29	A3A4A2C1422
5910-889-4503	33	A3A6A2C102
5910-889-4503	33	A3A6A3C109
5910-889-4905	23	A3A2A2C1205
5910-889-4905	23	A3A2A2C1209
5910-889-4905	23	A3A2A2C1212
5910-889-4905	23	A3A2A3C1217
5910-889-4905	23	A3A2A3C1220
5910-890-8988	10	A3A1A3A3C632
5910-890-8988	10	A3A1A3A3C639
5910-890-8988	11	A3A1A3A5C602
5910-890-8988	11	A3A1A3A5C603
5910-890-8988	11	A3A1A3A5C645
5910-890-8988	9	A3A1A3A7C619
5910-890-8988	9	A3A1A3A8C614
5910-890-8988	11	A3A1A3A9C624
5910-890-8988	9	A3A1A3C629
5910-891-2153	7	A3A1A2A2C808
5910-891-2153	7	A3A1A2A2C813
5910-892-7334	7	A3A1A2A2C822
5910-892-7831	34	A3A7A3C201
5910-892-7831	34	A3A7A3C214
5910-892-7831	34	A3A7A3C216
5910-892-7831	34	A3A7A3C218
5910-894-0421	17	A3A1A5A1C404
5910-902-3505	27	A3A4C1425
5910-939-7510	23	A3A2A2C1201
5910-939-7510	23	A3A2A2C1203
5910-939-7510	23	A3A2A2C1204
5910-939-7510	23	A3A2A2C1206
5910-939-7510	23	A3A2A2C1208
5910-939-7510	23	A3A2A2C1211
5910-939-7510	23	A3A2A2C1214
5910-939-7510	23	A3A2A2C1215
5910-939-7510	23	A3A2A3C1218
5910-939-7510	23	A3A2A3C1219
5910-939-7510	23	A3A2A3C1225
5910-939-7510	23	A3A2A3C1226
5910-939-7510	23	A3A2A3C1233
5910-939-7510	25	A3A3A1C1321
5910-939-7510	34	A3A7A2C221
5910-939-7510	34	A3A7A3C209
5910-939-7510	34	A3A7A3C210
5910-939-7510	34	A3A7A3C215
5910-952-6432	33	A3A6A2C104
5910-952-7046	38	A3A8A1C1616
5910-954-7368	17	A3A1A5A1C407
5910-954-7368	17	A3A1A5A1C408
5910-957-2054	38	A3A8A1C1606
5910-957-8583	34	A3A7A3C207
5910-957-9909	23	A3A2A3C1221
5910-958-4175	38	A3A8A1A2C1609
5910-964-6506	38	A3A8A1A2C1601
5910-964-6506	38	A3A8A1A2C1619
5910-964-6513	38	A3A8A1A2C1611
5910-964-6513	38	A3A8A1C1605
5910-984-7588	23	A3A2A3C1223
5910-984-7588	23	A3A2A3C1224

SECTION IV INDEX-FEDERAL STOCK NUMBER & REFERENCE NUMBER CROSS-REFERENCE TO FIGURE & ITEM NUMBER (Continued)

FEDERAL STOCK NUMBER	FIGURE NUMBER	ITEM NUMBER OR REF. DESIGNATION
5910-985-4719	29	A3A4A2C1404
5910-985-4719	29	A3A4A2C1408
5910-985-5184	14	A3A1A4A2C514
5910-985-5184	14	A3A1A4A2C531
5910-985-5184	15	A3A1A4A3C504
5910-985-5184	15	A3A1A4A3C510
5910-989-9695	23	A3A2A3C1228
5910-989-9695	23	A3A2A3C1231
5910-989-9695	29	A3A4A2C1403
5910-989-9695	28	A3A4A2C1406
5910-989-9695	28	A3A4A2C1407
5910-989-9695	28	A3A4A2C1424
5910-989-9695	33	A3A6A3C108
5910-989-9695	33	A3A6A3C110
5915-012-7948	10	A3A1A3A3E601
5915-012-7948	10	A3A1A3A3E602
5915-012-7948	10	A3A1A3A3E603
5915-012-7948	10	A3A1A3A3E604
5915-012-7948	10	A3A1A3A3E605
5915-012-7948	10	A3A1A3A3E606
5915-012-7948	10	A3A1A3A3E607
5915-012-7948	10	A3A1A3A3E608
5915-012-7948	11	A3A1A3A8E609
5915-226-3398	36	A3A8A1
5915-226-3403	37	A3A8A2FL1002
5915-728-5958	23	A3A2A2FL1201
5915-728-5971	6	A3A1A2A2FL801
5915-848-7966	16	A3A1A5FL401
5915-848-7966	16	A3A1A5FL402
5920-060-2424	36	A3A8F1001
5920-060-2424	36	A3A8F1002
5920-060-2424	36	A3A8F1003
5920-226-3414	19	A3A1A6A2L324
5930-073-3220	5	A3A1A1S701
5930-073-3222	5	A3A1A1S702
5930-757-2812	2	A1A1S103E
5930-786-3511	2	A1A1S103A
5930-786-3511	2	A1A1S103B
5930-786-3511	2	A1A1S104
5930-786-3525	2	A1A1S103C
5930-786-3526	2	A1A1S103D
5930-871-8546	41	A5S103B
5930-871-8547	31	A5S102A
5930-872-0957	41	A5S103A
5930-890-9726	36	A3A8S1001
5930-897-2154	37	A3A8A2S1003
5930-973-1135	37	A3A8A2S1002
5935-073-0308	36	A3A8CP1001
5935-089-1165	36	A3A8J1003
5935-226-3406	9	A3A1A3A5J601
5935-226-3406	13	A3A1A4W2J506
5935-226-3406	39	A3A8A1J1601
5935-552-7660	41	A5J102
5935-615-6263	36	A3A8P1001
5935-615-8555	24	A3A2A1J1201
5935-615-8555	24	A3A2A1J1202
5935-615-8555	24	A3A2A1J1203
5935-615-8555	27	A3A4A1J1401
5935-615-8555	27	A3A4A1J1402
5935-615-8555	32	A3A5A4J1501
5935-615-8555	32	A3A5A4J1502
5935-615-8555	32	A3A5A4J1503
5935-615-8555	32	A3A5A4J1504
5935-615-8555	32	A3A5A4J1505
5935-615-8555	32	A3A5A4J1506
5935-615-8555	33	A3A6A1J101
5935-615-8555	33	A3A6A1J103
5935-615-8555	34	A3A7A1J201
5935-615-8555	34	A3A7A1J202
5935-615-8555	34	A3A7A1J203
5935-615-8555	34	A3A7A1J204
5935-617-6837	33	A3A6A1J102
5935-702-3446	23	A3A2P1205
5955-728-3119	19	A3A1A6A1Y317
5935-728-3238	21	A3A1A7W1P901
5935-728-3239	21	A3A1A7W1P902
5935-728-3239	21	A3A1A7W1P903
5935-728-3239	21	A3A1A7W1P904
5935-728-3239	36	A3A8P1008
5935-728-3617	40	A4P1009
5935-728-3617	40	A4P1010
5935-728-3617	40	A4P1011
5935-729-0685	21	A3A1A7W1J901
5935-729-7312	7	A3A1A2A2XV802
5935-756-7802	36	A3A8J1009
5935-756-7802	36	A3A8J1010
5935-756-7802	36	A3A8J1011
5935-805-2535	14	A3A1A4A2J502
5935-805-2535	14	A3A1A4A2J503
5935-805-2535	13	A3A1A4A4J501
5935-805-2535	13	A3A1A4A4J504
5935-811-1382	34	A3A7P201
5935-814-0364	11	A3A1A3A9J602
5935-823-0778	30	A3A5W1P1501
5935-826-1007	41	A5J101
5935-881-9480	24	A3A2P1201
5935-881-9480	27	A3A4P1402
5935-892-9428	36	A3A8J1002
5935-892-9430	36	A3A8J1007
5935-892-9431	36	A3A8J1001
5935-892-9431	36	A3A8J1004
5935-892-9431	36	A3A8J1005

SECTION IV INDEX-FEDERAL STOCK NUMBER & REFERENCE NUMBER CROSS-REFERENCE TO FIGURE & ITEM NUMBER (Continued)

FEDERAL STOCK NUMBER	FIGURE NUMBER	ITEM NUMBER OR REF. DESIGNATION
5935-892-9634	7	A3A1A2A2XV803
5935-892-9682	16	A3A1A5J402
5935-892-9682	19	A3A1A6J302
5935-899-9033	41	A5A2P1
5935-901-7026	13	A3A1A4W2P507
5935-901-7026	21	A3A1A7W1P905
5935-902-4072	37	A3A8A2CP1002
5935-902-4072	37	A3A8A2CP1003
5935-941-9642	34	A3A7P203
5935-941-9642	34	A3A7P204
5935-941-9642	34	A3A7P205
5935-941-9642	36	A3A8P1002
5935-941-9642	36	A3A8P1003
5935-941-9642	36	A3A8P1004
5935-945-0989	40	A4J1008
5935-963-1432	24	A3A2P1204
5935-963-1432	35	A3A7P202
5935-973-0558	6	A3A1A2A1A1J801
5935-973-0558	34	A3A7J205
5935-984-2069	2	A1J101
5940-176-7086	7	A3A1A2A2E5
5940-176-7086	7	A3A1A2A2E6
5940-501-8634	6	A3A1A2A1A1E1
5940-501-8634	31	A3A5A3E3
5940-501-8634	37	A3A8A2E2
5940-539-0511	37	A3A8A2E1
5940-644-8722	23	A3A2E1
5940-644-8722	25	A3A3E1
5940-644-8722	27	A3A4E2
5940-644-8722	33	A3A6E1
5940-644-8722	34	A3A7E1
5940-644-8722	2	A1E1
5940-665-5592	31	A3A5E1
5940-675-8124	34	A3A7E2
5940-682-2477	2	A1A1E3
5940-836-3536	6	A3A1A2A1A1E2
5940-836-3536	7	A3A1A2A2E3
5940-836-3536	12	A3A1A4E14
5940-836-3536	21	A3A1A7E2
5940-836-3536	37	A3A8A2E3
5940-836-3536	36	A3A3E1
5940-878-3768	5	A3A1A1E10
5940-947-7259	6	A3A1A2A1A1E3
5945-089-0733	32	A3A5K1501
5945-728-5973	26	A3A3A1K1301
5945-728-5973	27	A3A4K1401
5945-854-8546	5	A3A1A1K703
5945-854-8546	37	A3A8A2K1001
5945-854-8546	41	A5K101
5950-013-7272	26	A3A3A2T1301
5950-027-2761	17	A3A1A5A1L405
5950-054-9131	6	A3A1A2A1A1L805
5950-054-9131	38	A3A8A1A1L1609
5950-086-2934	9	A3A1A3L604
5950-086-2934	9	A3A1A3L605
5950-086-2934	9	A3A1A3L607
5950-086-2934	9	A3A1A3L608
5950-086-2934	9	A3A1A3L611
5950-086-2934	9	A3A1A3L614
5950-086-2934	9	A3A1A3L618
5950-086-2934	35	A3A7A2L201
5950-086-2934	35	A3A7A2L202
5950-086-2934	35	A3A7A2L203
5950-086-2934	35	A3A7A2L206
5950-089-2077	17	A3A1A5A1L402
5950-089-3021	28	A3A4A2L1401
5950-226-3386	38	A3A8A1L1606
5950-226-3413	19	A3A1A6A2L312
5950-226-4155	38	A3A8A1L1604
5950-226-4156	38	A3A8A1L1602
5950-226-4156	38	A3A8A1L1603
5950-226-4157	20	A3A1A6A2L310
5950-226-4158	20	A3A1A6A2L311
5950-226-4159	20	A3A1A6A2L307
5950-226-4160	20	A3A1A6A2L306
5950-226-4161	20	A3A1A6A2L309
5950-226-4162	20	A3A1A6A2L305
5950-226-4207	20	A3A1A6A2L313
5950-226-4211	13	A3A1A4L503
5950-226-4211	13	A3A1A4L504
5950-226-4211	13	A3A1A4L505
5950-226-4211	13	A3A1A4L506
5950-226-4212	13	A3A1A4L501
5950-226-4212	13	A3A1A4L502
5950-226-4214	20	A3A1A6A2L322
5950-226-4215	38	A3A8A1L1601
5950-226-4215	38	A3A8A1L1608
5950-226-4216	38	A3A8A1L1605
5950-226-4637	20	A3A1A6A2L308
5950-728-5166	10	A3A1A3A3T601
5950-728-5168	6	A3A1A2A1A1L803
5950-728-5169	6	A3A1A2A1A1L801
5950-728-5169	6	A3A1A2A1A1L802
5950-728-5170	11	A3A1A3A6L616
5950-278-5173	17	A3A1A5A1L401
5950-728-5173	17	A3A1A5A1L403
5950-763-2248	23	A3A2A3L1205
5950-764-5901	11	A3A1A3A4L602
5950-764-5901	11	A3A1A3A6L603
5950-764-5901	11	A3A1A3A7L612
5950-764-5901	11	A3A1A3A8L609
5950-764-5901	11	A3A1A3A9L615
5950-781-1439	12	A3A1A4E10
5950-781-1439	12	A3A1A4E11
5950-781-1439	12	A3A1A4E12
5950-781-1439	12	A3A1A4E13
5950-781-1439	12	A3A1A4E8
5950-781-1439	12	A3A1A4E9
5950-815-7306	10	A3A1A3A3L617
5950-819-3228	11	A3A1A3A6L606

FEDERAL STOCK NUMBER	FIGURE NUMBER	ITEM NUMBER OR REF. DESIGNATION
5950-819-3228	11	A3A1A3A7L613
5950-819-3228	11	A3A1A3A8L610
5950-829-0177	20	A3A1A6A1L301
5950-829-0177	19	A3A1A6A1L303
5950-829-0177	20	A3A1A6L302
5950-829-0177	20	A3A1A6L304
5950-842-2247	14	A3A1A4A2L507
5950-842-2247	14	A3A1A4A2L508
5950-842-2247	14	A3A1A4A2L509
5950-842-2247	17	A3A1A5A1L404
5950-842-2247	23	A3A2A2L1203
5950-842-2247	23	A3A2A2L1204
5950-878-2442	23	A3A2A2L1201
5950-878-2442	23	A3A2A2L1202
5950-878-2442	23	A3A2A3L1206
5950-878-2442	28	A3A4A2L1402
5950-890-9757	35	A3A7A3L204
5950-890-9757	35	A3A7A3L205
5950-892-8242	38	A3A8A1L1607
5955-728-3109	19	A3A1A6A1Y312
5955-728-3111	19	A3A1A6A1Y304
5955-728-3610	19	A3A1A6A1Y313
5955-728-3612	19	A3A1A6A1Y314
5955-728-3613	19	A3A1A6A1Y315
5955-728-3614	19	A3A1A6A1Y316
5955-730-2151	19	A3A1A6A1Y305
5955-730-2210	19	A3A1A6A1Y307
5955-730-2218	19	A3A1A6A1Y308
5955-730-2463	19	A3A1A6A1Y310
5955-730-2530	19	A3A1A6A1Y311
5960-237-0077	6	A3A1A2A2V802
5960-262-1357	6	A3A1A2A2V801
5960-556-2091	35	A3A7A2CR201
5960-556-2091	35	A3A7A2CR202
5960-556-2091	35	A3A7A2CR203
5960-556-2091	35	A3A7A2CR210
5960-556-2091	35	A3A7A3CR205
5960-556-2091	35	A3A1A6A1Y304
5960-577-6084	25	A3A3A1CR1305
5960-577-6084	25	A3A3A1CR1306
5960-615-0095	10	A3A1A3A3CR601
5960-615-0095	10	A3A1A3A3CR602
5960-615-0095	10	A3A1A3A3CR603
5960-615-0095	10	A3A1A3A3CR604
5960-615-0095	10	A3A1A3A3CR605
5960-615-0095	10	A3A1A3A3CR606
5960-615-0095	10	A3A1A3A3CR607
5960-615-0095	10	A3A1A3A3CR608
5960-615-0095	14	A3A1A4A2CR501
5960-615-0095	14	A3A1A4A2CR502
5960-615-0095	14	A3A1A4A2CR503
5960-615-0095	14	A3A1A4A2CR504
5960-615-0095	14	A3A1A4A2CR505
5960-615-0095	14	A3A1A4A2CR506
5960-615-0095	14	A3A1A4A2CR507
5960-615-0095	17	A3A1A5A1CR411
5960-615-0095	20	A3A1A6A1CR301
5960-615-0095	26	A3A3A1CR1301
5960-615-0095	26	A3A3A1CR1302
5960-615-0095	25	A3A3A1CR1303
5960-615-0095	26	A3A3A1CR1304
5960-615-0095	25	A3A3A1CR1310
5960-615-0095	26	A3A3A1CR1311
5960-615-0095	26	A3A3A1CR1312
5960-615-0095	26	A3A3A1CR1313
5960-615-0095	25	A3A3A1CR1314
5960-615-0095	25	A3A3A1CR1317
5960-615-0095	25	A3A3A1CR1319
5960-615-0095	28	A3A4A2CR1403
5960-615-0095	28	A3A4A2CR1406
5960-615-0095	33	A3A6A3CR102
5960-615-0095	33	A3A6A3CR103
5960-615-0095	33	A3A6A3CR107
5960-615-0095	35	A3A7A2CR204
5960-615-0095	35	A3A7A2CR211
5960-615-0095	38	A3A8A1A1CR1601

FEDERAL STOCK NUMBER	FIGURE NUMBER	ITEM NUMBER OR REF. DESIGNATION
5960-615-0095	38	A3A8A1A1CR1602
5960-615-0095	38	A3A8A1A1CR1603
5960-615-0095	38	A3A8A1A1CR1604
5960-615-0095	36	A3A8A3CR1001
5960-615-4597	6	A3A1A2A2E1
5961-686-8578	24	A3A2A2Q1201
5961-686-8578	24	A3A2A2Q1202
5961-686-8578	24	A3A2A2Q1203
5961-686-8578	24	A3A2A2Q1204
5961-686-8578	24	A3A2A3Q1205
5961-686-8578	24	A3A2A3Q1206
5961-686-8578	24	A3A2A3Q1207
5961-686-8578	24	A3A2A3Q1208
5961-686-8578	24	A3A2A3Q1209
5961-686-8578	24	A3A2A3Q1210
5961-686-8578	29	A3A4A2Q1401
5960-728-5968	6	A3A1A2A2V803
5960-752-6115	25	A3A3A1CR1315
5960-811-8372	41	A5CR101
5960-845-6458	26	A3A3A1CR1318
5961-050-7499	29	A3A4A2Q1402
5961-050-7499	28	A3A4A2Q1403
5961-087-6047	27	A3A4CR1405
5961-087-6047	30	A3A5A2CR1501
5961-087-6047	30	A3A5A2CR1511
5961-226-7533	37	A3A8A2CR1002
5961-370-1645	27	A3A4CR1404
5961-615-0095	23	A3A2A3CR1201
5961-615-0759	31	A3A5A3Q1502
5961-615-0759	31	A3A5A3Q1503
5961-686-8578	17	A3A1A5A1Q401
5961-686-8578	25	A3A3A1Q1301
5961-686-8578	26	A3A3A1Q1302
5961-686-8578	26	A3A3A1Q1303
5961-686-8578	26	A3A3A1Q1307
5961-686-8578	26	A3A3A2Q1304
5961-686-8578	33	A3A6A2Q101
5961-686-8578	33	A3A6A2Q105
5961-686-8578	33	A3A6A2Q106
5961-686-8578	33	A3A6A2Q107
5961-686-8578	33	A3A6A3Q102
5961-686-8578	33	A3A6A3Q103
5961-686-8578	33	A3A6A3Q104
5961-686-8578	34	A3A7A2Q203
5961-686-8578	34	A3A7A2Q205
5961-686-8578	34	A3A7A3Q204
5961-728-5965	29	A3A4A2C1415
5961-752-6121	23	A3A2A3CR1207
5961-752-6121	33	A3A6A2CR101
5961-802-7965	31	A3A5A3Q1501
5961-807-7339	26	A3A3A2Q1305
5961-807-7339	26	A3A3A2Q1306
5961-811-8372	5	A3A1A1CR701
5961-811-8372	30	A3A5A2CR1502
5961-811-8372	30	A3A5A2CR1503
5961-811-8372	30	A3A5A2CR1508
5961-821-2309	26	A3A3A2CR1309
5961-821-2315	29	A3A4A2CR1402
5961-833-3043	33	A3A6A2CR105
5961-833-3043	33	A3A6A2CR106
5961-836-6667	26	A3A3A1CR1316
5961-836-6667	24	A3A2A3CR1202
5961-836-6667	23	A3A2A3CR1203
5961-842-8797	5	A3A1A1CR702
5961-842-8797	5	A3A1A1CR703
5961-842-9864	33	A3A6A2CR108
5961-851-8296	25	A3A3A1CR1308
5961-851-8296	26	A3A3A2CR1307
5961-851-8296	33	A3A6A2CR104
5961-851-8296	35	A3A7A2CR207
5961-853-1065	21	A3A1A7CR901
5961-853-1065	23	A3A2A3CR1206
5961-853-1065	29	A3A4A2CR1401
5961-878-0844	32	A3A5CR1509
5961-882-4244	10	A3A1A3A3Q604
5961-882-4244	11	A3A1A3A7Q602
5961-882-4244	11	A3A1A3A9Q603
5961-882-4244	14	A3A1A4A2Q501
5961-882-4244	14	A3A1A4A2Q502
5961-882-4244	14	A3A1A4A2Q503
5961-892-3473	34	A3A7A3Q201
5961-892-3473	34	A3A7A3Q206
5961-893-5938	35	A3A7CR208
5961-902-8820	10	A3A1A3A3Q605
5961-902-8820	11	A3A1A3A8Q601
5961-902-8820	20	A3A1A6A1Q301
5961-958-8169	30	A3A5A2Q1504
5961-972-9395	30	A3A5A2CR1504
5961-972-9395	30	A3A5A2CR1505
5961-972-9395	30	A3A5A2CR1506
5961-972-9395	30	A3A5A2CR1507
5961-994-7742	10	A3A1A3A3E2
5961-994-7742	14	A3A1A4A2MP1
5961-995-2986	23	A3A2A3CR1204
5961-995-2986	23	A3A2A3CR1205
5970-756-8821	18	A3A1A5A1E3
5970-756-8821	19	A3A1A6A1E2
5985-226-3402	37	A3A8A2K1002
5985-878-4461	41	A5MP11
5985-878-4464	41	A5MP12
5985-878-4465	41	A5MP10
6105-899-9032	41	A5B101
6145-812-5034		W8
6145-814-1209		W7
6145-897-8990		W4
6210-824-5595	2	A1XDS101
6210-824-5595	2	A1XDS102
6240-155-7836	2	A1DS101
6240-155-7836	2	A1DS102
6240-179-1811	5	A3A1A1DS701
6625-226-7528	37	A3A8A2M1001

ADDITIONAL FEDERAL STOCK NUMBERS

FEDERAL STOCK NUMBER	FIGURE NUMBER	ITEM NUMBER OR REF. DESIGNATION
4130-763-1630	3	A3A9MP3
5120-757-2822	3	A3MP2
5305-054-5636	41	A5H12
5305-054-5646	41	A5H28
5305-054-5648	41	A5A1H35
5305-054-5648	41	A5H10
5305-054-6670	41	A5H30
5305-206-5957	2	A1MP9H2
5305-206-5957	2	A1MP10H2
5305-727-8832	41	A5H32
5305-764-2966	41	A5H11
5305-764-2966	41	A5H12
5305-770-2533	41	A5A1H9
5305-770-2533	41	A5H31
5305-770-2580	41	A5H33
5310-208-3786	41	A5H22
5310-655-6930	35	A3A7CR208H1
5310-782-1349	41	A5H15
5325-286-6047	41	A5H3
5330-089-8128	41	A5H2
5330-089-8239	41	A5H1
5330-691-0145	37	A3A8A2MP4
5340-089-8232	41	A5MP1
5340-660-0968	41	A5MP41
5340-993-9522	41	A5A1MP1
5821-089-8202	41	A5S101
5821-089-8203	41	A5S103
5821-089-8204	41	A5MP34
5821-089-8205	41	A5A3MP3
5821-266-4266	4	A3A1A1
5821-437-2351	3	A3A7
5821-728-3272	31	A3A5A3
5821-880-9971	41	A5A2J103
5821-938-4526	41	A5MP38
5910-082-4617	10	A3A1A3A3C637
5910-544-6494	11	A3A1A3A4C606
5910-666-8927	41	A5C154
5910-839-3940	28	A3A4A2C1405
5910-965-5484	15	A3A1A4A3C513
5910-965-5484	15	A3A1A4A3C530
5910-999-9752	33	A3A6A3C106
5915-889-4979	37	A3A8A2FL1001
5915-922-7730	41	A5J101
5930-757-4314	2	A1S101
5930-757-4316	2	A1S102
5935-073-3248	21	A3A1A7MP1
5935-073-3248	39	A3A8A1MP2
5935-552-7660	41	A5J102
5935-729-7318	7	A3A1A2XV801
5935-806-0109	9	A3A1A3A5W1P604
5935-989-0294	5	A3A1W1P701

SECTION IV INDEX-FEDERAL STOCK NUMBER & REFERENCE NUMBER CROSS-REFERENCE TO FIGURE & ITEM NUMBER (Continued)

FEDERAL STOCK NUMBER	FIGURE NUMBER	ITEM NUMBER OR REF. DESIGNATION
ADDITIONAL FEDERAL STOCK NUMBERS		
5940-258-1813	7	A3A1A2A2E4
5945-821-4800	41	A5K101
5945-985-8163	11	A3A1A3A5K601
5950-226-4210	12	A3A1A4E2
5950-226-4210	12	A3A1A4E3
5950-226-4210	12	A3A1A4E4
5950-226-4210	12	A3A1A4E5
5950-226-4210	12	A3A1A4E6
5950-226-4210	12	A3A1A4E7
5950-226-4213	20	A3A1A6A2L323
5950-226-4255	34	A3A7A3T201
5950-728-5996	30	A3A5T1503
5950-728-5999	30	A3A5T1502
5950-763-0507	29	A3A4A2T1401
5950-763-2247	30	A3A5T1501
5950-824-3603	20	A3A1A6A2L320
5950-824-3604	20	A3A1A6A2L319
5950-824-3605	20	A3A1A6A2L318
5950-824-3606	20	A3A1A6A2L317
5950-824-3607	20	A3A1A6A2L314
5950-824-3608	20	A3A1A6A2L315
5950-824-3609	20	A3A1A6A2L316
5950-852-2395	33	A3A6A2L101
5950-901-1961	20	A3A1A6A2L321
5950-922-8155	39	A3A8A1L1610
5955-728-3112	18	A3A1A5A1Y439
5955-728-3113	18	A3A1A5A1Y440
5955-728-3244	7	A3A1A2A2W1
5955-728-3248	18	A3A1A5A1Y430
5955-728-3250	18	A3A1A5A1Y431
5955-728-3251	18	A3A1A5A1Y432
5955-728-3252	18	A3A1A5A1Y433
5955-728-3601	18	A3A1A5A1Y427
5955-728-3602	18	A3A1A5A1Y428
5955-728-3603	18	A3A1A5A1Y429
5955-728-3604	18	A3A1A5A1Y421
5955-728-3605	18	A3A1A5A1Y422
5955-728-3606	18	A3A1A5A1Y434
5955-728-3607	18	A3A1A5A1Y423
5955-728-3608	18	A3A1A5A1Y424
5955-728-3609	18	A3A1A5A1Y425
5955-728-3611	18	A3A1A5A1Y426
5955-728-3646	18	A3A1A5A1Y436
5955-728-3647	18	A3A1A5A1Y437
5955-728-3648	18	A3A1A5A1Y438
5955-728-3649	18	A3A1A5A1Y435
5961-837-9112	16	A3A1A5MP5H1
5985-226-3388	38	A3A8A1A2K1601
5985-226-3388	38	A3A8A1A2K1602
5985-226-3402	2	A1A1S103EH2
5985-226-3402	37	A3A8A2K1002
5985-879-8220	34	A3A7A2K202
5995-226-4200	36	A3A8W1
5995-226-4202	36	A3A8W2
5995-226-4203	36	A3A8W3
5955-226-4204	38	A3A8A1W1
6105-089-8101	41	A5MP32
6105-226-4632	5	A3A1A1B701
6210-691-5422	2	A1E101
6210-691-5422	2	A1E102

SECTION IV INDEX-FEDERAL STOCK NUMBER & REFERENCE NUMBER CROSS-REFERENCE TO FIGURE & ITEM NUMBER (Continued)

FEDERAL STOCK NUMBER	FIGURE NUMBER		ITEM NUMBER OR REF. DESIGNATION
REF NO.	MFG CO.	FIG NO.	ITEM NO. OR REF DES.
AN6227-8	88044	2	AIMP5
AN936A10B	88044	34	A3A7CR208H1
AN936B10B	96906	37	A3A8A2CR1002H2
AN936B4B	88044	2	A1J10H4
AN936B4B	88044	5	A3A1A1E10H1
AN936B4B	88044	6	A3A1A2A2E6H3
A0984	33173	6	A3A1A2A2V803
A10104	07047	30	A3A5A2E2
A140406-14	37942	2	A1S101H1
A140406-14	37942	2	A1S102H1
BP1191	99800	17	A3A1A5A1L401
BP1192	99800	17	A3A1A5A1L402
BP1191	99800	17	A3A1A5A1L403
B218C5-5	81860		A2A1A1MP1
CDD1765	71279	23	A3A2A3L1205
CDD1895	71279	11	A3A1A3A4L602
CDD1895	71279	11	A3A1A3A6L603
CDD1895	71279	11	A3A1A3A7L612
CDD1895	71279	11	A3A1A3A8L609
CDD1895	71279	11	A3A1A3A9L615
CK05CW102M	81349	10	A3A1A3A3C632
CK05CW102M	81349	10	A3A1A3A3C639
CK05CW102M	81349	11	A3A1A3A5C602
CK05CW102M	81349	11	A3A1A3A5C603
CK05CW102M	81349	11	A3A1A3A5C645
CK04CW102M	81349	9	A3A1A3A7C619
CK05CW102M	81349	9	A3A1A3A8C614
CK05CW102M	81349	11	A3A1A3A9C624
CK05CW102M	81349	9	A3A1A3C629
CK06CW222M	81349	7	A3A1A2A2C819
CK06CW222M	81349	17	A3A1A5A1C402
CK06CW222M	81349	17	A3A1A5A1C410
CK06CW222M	81349	17	A3A1A5A1C411
CK06CW222M	81349	17	A3A1A5A1C412
CK06CW222M	81349	17	A3A1A5A1C413
CK06CW222M	81349	20	A3A1A6A1C301
CK06CW222M	81349	20	A3A1A6A1C302
CK06CW222M	81349	20	A3A1A6A1C303
CK06CW222M	81349	20	A3A1A6A1C307
CK06CW222M	81349	20	A3A1A6A1C308
CK06CW222M	81349	21	A3A1A7C901
CK06CW222M	81349	21	A3A1A7C902
CK06CW222M	81349	21	A3A1A7C903
CK06CW222M	81349	21	A3A1A7C904
CK06CW222M	81349	21	A3A1A7C905
CK06CW222M	81349	21	A3A1A7C906
CK06CW222M	81349	34	A3A7A2C202
CK06CW222M	81349	34	A3A7A2C203
CK06CW222M	81349	34	A3A7A2C204
CK06CW222M	81349	34	A3A7A2C205
CK06CW222M	81349	39	A3A8A1C1629
CK06CW222M	81349	39	A3A8A1C1630
CK06CW222M	81349	39	A3A8A1C1631
CK06CW472M	81349	34	A3A7A3C206
CK06CW472M	81349	36	A3A8A3C1002
CK06CW472M	81349	36	A3A8A3C1003
CK06CW472M	81349	36	A3A8A3C1004
CK06CW472M	81349	36	A3A8A3C1005
CK13AX332M	81349	28	A3A4A2C1409
CK13AX332M	81349	28	A3A4A2C1412
CK13AX332M	81349	29	A3A4A2C1414
CK13AX472M	81349	23	A3A2A2C1205
CK13AX472M	81349	23	A3A2A2C1209
CK13AX472M	81349	23	A3A2A2C1212
CK13AX472M	81349	23	A3A2A3C1217
CK13AX472M	81349	23	A3A2A3C1220
CK14AX103M	81349	14	A3A1A4A2C501
CK14AX103M	81349	14	A3A1A4A2C507
CK14AX103M	81349	14	A3A1A4A2C515
CK14AX103M	81349	14	A3A1A4A2C516
CK14AX103M	81349	14	A3A1A4A2C517

SECTION IV INDEX-FEDERAL STOCK NUMBER & REFERENCE NUMBER CROSS-REFERENCE TO FIGURE & ITEM NUMBER (Continued)

FEDERAL STOCK NUMBER	FIGURE NUMBER		ITEM NUMBER OR REF. DESIGNATION
REF NO.	MFG CO.	FIG NO.	ITEM NO OR REF DES.
CK14AX103M	81349	14	A3A1A4A2C520
CK14AX103M	81349	14	A3A1A4A2C521
CK14AX103M	81349	14	A3A1A4A2C522
CK14AX103M	81349	14	A3A1A4A2C535
CK14AX103M	81349	14	A3A1A4A2C536
CK14AX103M	81349	14	A3A1A4A2C537
CK14AX103M	81349	14	A3A1A4A2C538
CK14AX103M	81349	14	A3A1A4A2C539
CK14AX103M	81349	29	A3A4A2C1420
CK15AX223M	81349	23	A3A2A2C1201
CK15AX223M	81349	23	A3A2A2C1203
CK15AX223M	81349	23	A3A2A2C1204
CK15AX223M	81349	23	A3A2A2C1206
CK15AX223M	81349	23	A3A2A2C1208
CK15AX223M	81349	23	A3A2A2C1211
CK15AX223M	81349	23	A3A2A2C1214
CK15AX223M	81349	23	A3A2A2C1215
CK15AX223M	81349	23	A3A2A3C1218
CK15AX223M	81349	23	A3A2A3C1219
CK15AX223M	81349	23	A3A2A3C1225
CK15AX223M	81349	23	A3A2A3C1226
CK15AX223M	81349	23	A3A2A3C1233
CK15AX223M	81349	25	A3A3A1C1321
CK15AX223M	81349	34	A3A7A2C221
CK15AX223M	81349	34	A3A7A3C209
CK15AX223M	81349	34	A3A7A3C210
CK15AX223M	81349	34	A3A7A3C215
CK16AX473M	81349	23	A3A2A2C1202
CK16AX473M	81349	23	A3A2A2C1207
CK16AX473M	81349	23	A3A2A2C1210
CK17AX104M	81349	34	A3A7A3C213
CK60AW152M	81349	7	A3A1A2A2C801
CK60AW152M	81349	7	A3A1A2A2C802
CK60AW152M	81349	7	A3A1A2A2C803
CK60AW152M	81349	7	A3A1A2A2C807
CK60AW152M	81349	7	A3A1A2A2C809
CK60AW152M	81349	7	A3A1A2A2C810
CK60AW152M	81349	7	A3A1A2A2C814
CK60AW152M	81349	7	A3A1A2A2C815
CK60AW152M	81349	7	A3A1A2A2C820
CK60AW152M	81349	7	A3A1A2A2C821
CK60AW152M	81349	38	A3A8A1A1C1620
CK60AW152M	81349	38	A3A8A1A1C1621
CK60AW152M	81349	38	A3A8A1A1C1623
CK60AW152M	81349	38	A3A8A1A1C1624
CK61AW222M	81349	7	A3A1A2A2C822
CL25BJ600UP3	81349	31	A3A5C1501
CL65CH150MP3	81349	31	A3A5A3C1502
CL65CH150MP3	81349	31	A3A5A3C1503
CL65CJ820MP3	81349	27	A3A4C1423
CL65CJ820MP3	81349	30	A3A5A2C1504
CM05C050K03	81349	17	A3A1A5A1C409
CM05ED820G03	81349	23	A3A2A3C1222
CM05E330G03	81349	38	A3A8A1C1606
CM05E390G03	81349	38	A3A8A1C1614
CM05E390G03	81349	39	A3A8A1C1627
CM05E390G03	81349	39	A3A8A1C1628
CM05E430J03	81349	38	A3A8A1A2C1609
CM05E510J03	81349	38	A3A8A1A2C1601
CM05E510J03	81349	38	A3A8A1A2C1619
CM05E560G03	81349	38	A3A8A1C1616
CM05E620J03	81349	38	A3A8A1A2C1611
CM05E620J03	81349	38	A3A8A1C1605
CM05E680J03	81349	17	A3A1A5A1C434
CM05E680J03	81349	38	A3A8A1C1607
CM05E750J03	81349	38	A3A8A1C1603
CM05E820J03	81349	38	A3A8A1A1C1625
CM05E820J03	81349	38	A3A8A1A1C1626
CM05E820J03	81349	38	A3A8A1C1615
CM05FD101G03	81349	23	A3A2A3C1223
CM05FD101G03	81349	23	A3A2A3C1224
CM05FD391G03	81349	23	A3A2A3C1221
CM05F101J03	81349	7	A3A1A2A2C808
CM05F101J03	81349	7	A3A1A2A2C813
CM05F111J03	81349	17	A3A1A5A1C403
CM05F111J03	81349	38	A3A8A1C1613
CM05F161J03	81349	17	A3A1A5A1C405
CM05F161J03	81349	17	A3A1A5A1C406
CM05F241J03	81349	17	A3A1A5A1C407
CM05F241J03	81349	17	A3A1A5A1C408
CM05F910J03	81349	38	A3A8A1C1617
CM06FD122G03	81349	26	A3A3A2C1314
CM06FD152G03	81349	29	A3A4A2C1418
CM06FD272G03	81349	26	A3A3A2C1312
CM06F152J03	81349	34	A3A7A3C207
CM06F182G03	81349	29	A3A4A2C1417
CM06F182J03	81349	14	A3A1A4A2C532
CM06F182J03	81349	23	A3A2A3C1216
CM06F182J03	81349	23	A3A2A3C1229
CM06F182J03	81349	34	A3A7A3C208
CM06F392J03	81349	34	A3A7A3C211
CM06F561J03	81349	33	A3A6A2C104
CM06F681J03	81349	34	A3A7A3C212
CM07FD562G03	81349	25	A3A3A2C1313
CM15B180K03	81349	28	A3A4A2C1413
CM15D331G03	81349	14	A3A1A4A2C534
CM15D391G03	81349	14	A3A1A4A2C533
CP08A1KB474K3	81349	36	A3A8C1001
CR55U26025-00KC	81349	19	A3A1A6A1Y301
CR55U28025-00KC	81349	19	A3A1A6A1Y302
CR55U30025-00KC	81349	19	A3A1A6A1Y303
CR55U32025-00KC	81349	19	A3A1A6A1Y304
CR55U34025-00KC	81349	19	A3A1A6A1Y305
CR55U36025-00KC	81349	19	A3A1A6A1Y306
CR55U38025-00KC	81349	19	A3A1A6A1Y307
CR55U40025-00KC	81349	19	A3A1A6A1Y308
CR55U42025-00KC	81349	19	A3A1A6A1Y309
CR55U44025-00KC	81349	19	A3A1A6A1Y310
CR55U46025-00KC	81349	19	A3A1A6A1Y311
CR55U48025-00KC	81349	19	A3A1A6A1Y312
CR55U50025-00KC	81349	19	A3A1A6A1Y313
CR55U52025-00KC	81349	19	A3A1A6A1Y314
CR55U54025-00KC	81349	19	A3A1A6A1Y315
CR55U56025-00KC	81349	19	A3A1A6A1Y316

FEDERAL STOCK NUMBER	FIGURE NUMBER		ITEM NUMBER OR REF. DESIGNATION
REF NO.	MFG CO.	FIG NO.	ITEM NO OR REF DES.
CR55U58025-00KC	81349	19	A3A1A6A1Y317
CR55U60025-00KC	81349	19	A3A1A6A1Y318
CR55U62025-00KC	81349	19	A3A1A6A1Y319
CR55U64025-00KC	81349	19	A3A1A6A1Y320
CR64U4475KC	81349	18	A3A1A5A1Y421
CR64U4525KC	81349	18	A3A1A5A1Y422
CR64U457KC	81349	18	A3A1A5A1Y423
CR64U4625KC	81349	18	A3A1A5A1Y424
CR64U4675KC	81349	18	A3A1A5A1Y425
CR64U4725KC	81349	18	A3A1A5A1Y426
CR64U4775KC	81349	18	A3A1A5A1Y427
CR64U4825KC	81349	18	A3A1A5A1Y428
CR64U4875KC	81349	18	A3A1A5A1Y429
CR74U4925KC	81349	18	A3A1A5A1Y430
CR64U4975KC	81349	18	A3A1A5A1Y431
CR64U5025KC	81349	18	A3A1A5A1Y432
CR64U5075KC	81349	18	A3A1A5A1Y433
CR64U5125KC	81349	18	A3A1A5A1Y434
CR64U5175-000KC	81349	18	A3A1A5A1Y435
CR64U5225-000KC	81349	18	A3A1A5A1Y436
CR64U5275-000KC	81349	18	A3A1A5A1Y437
CR64U5325-000KC	81349	18	A3A1A5A1Y438
CR64U5375-000KC	81349	18	A3A1A5A1Y439
CR64U5425-000KC	81349	18	A3A1A5A1Y440
CS13AB470M	81349	29	A3A4A2C1404
CS13AB470M	81349	29	A3A4A2C1408
CS13AB560K	81349	34	A3A7A3C201
CS13AB560K	81349	34	A3A7A3C214
CS13AB560K	81349	34	A3A7A3C216
CS13AB560K	81349	34	A3A7A3C218
CS13AC390K	81349	23	A3A2A3C1230
CS13AC390K	81349	23	A3A2A3C1232
CS13AC390K	81349	26	A3A3A1C1302
CS13AC390K	81349	26	A3A3A2C1308
CS13AC390K	81349	25	A3A3A2C1311
CS13AC4R7M	81349	25	A3A3A1C1316
CS13AC4R7M	81349	28	A3A4A2C1402
CS13AD3R3M	81349	30	A3A5A2C1506
CS13AE1R5M	81349	29	A3A4A2C1410
CS13AE100M	81349	23	A3A2A3C1227
CS13AE100M	81349	26	A3A3A2C1306
CS13AE100M	81349	25	A3A3A2C1307
CS13AE100M	81349	25	A3A3A2C1310
CS13AE100M	81349	29	A3A4A2C1422
CS13AE100M	81349	33	A3A6A2C102
CS13AE100M	81349	33	A3A6A3C109
CS13AE2R2M	81349	23	A3A2A3C1228
CS13AE2R2M	81349	23	A3A2A3C1231
CS13AE2R2M	81349	29	A3A4A2C1403
CS13AE2R2M	81349	28	A3A4A2C1406
CS13AE2R2M	81349	28	A3A4A2C1407
CS13AE2R2M	81349	28	A3A4A2C1424
CS13AE2R2M	81349	33	A3A6A3C108
CS13AE2R2M	81349	33	A3A6A3C110
CS13AE8R2K	81349	28	A3A4A2C1411
CS13AFR33M	81349	34	A3A7A2C217
CS13AF010K	81349	28	A3A4A2C1421
CS13AF010M	81349	23	A3A2A2C1213
CS13AF010M	81349	25	A3A3A1C1301
CS13AF010M	81349	25	A3A3A1C1303
CS13AF010M	81349	25	A3A3A1C1317
CS13AF010M	81349	26	A3A3A1C1318
CS13AF010M	81349	26	A3A3A1C1319
CS13AF010M	81349	25	A3A3A2C1320
CS13AF010M	81349	33	A3A6A2C101
CS13AF010M	81349	33	A3A6A2C111
CS13AF010M	81349	33	A3A6A2C112
CS13AF010M	81349	33	A3A6A2C114
CS13AF010M	81349	33	A3A6A2C115
CS13AF010M	81349	33	A3A6A3C103
CS13AF010M	81349	33	A3A6A3C105
CS13AF010M	81349	38	A3A8A1A1C1622
CTM103VAJ	24446	27	A3A4C1425
CT200-00-10K	75042	28	A3A4A2R1413
CT200-00-10K	75042	35	A3A7A2R211
CT200-00-100	75042	28	A3A4A2R1402
CT200-00-2K	75042	33	A3A6A3R108
CT200-00-2K	75042	33	A3A6A3R110
CT200-002K	75042	33	A3A6A3R112
CT200-00-2K	75042	35	A3A7A3R227
CT200-00-20K	75042	28	A3A4A2R1436
CT200-005K	75042	26	A3A3A1R1332
CT200-00-500	75042	35	A3A7A3R224
CY12C1R5C	81349	20	A3A1A6A1C306
CYCY12C150G	81349	38	A3A8A1C1608
CY12C240G	81349	38	A3A8A1C1604
CY12C240G	81349	38	A3A8A1C1618
CY12C3R9C	81349	38	A3A8A1C1602
CY12C6R8C	81349	38	A3A8A1C1612
CY12C6R8C	81349	38	A3A8A1A2C1610
CY31C472G	81349	33	A3A6A2C113
DAF15SC7F151	91146	36	A3A8J1001
DAF15SC75151	91146	36	A3A8J1005
DAF15SC75151	91146	36	A3A8J1004
DA15PC7	91146	30	A3A5W1P1501
DA15S1C7F151	71468	36	A3A8J1006
DA718-002	71590	10	A3A1A3A3C634
DA718-002	71590	10	A3A1A3A3C636
DA718-002	71590	10	A3A1A3A3C638
DA718-002	71590	10	A3A1A3A3C640
CBF25SC7	91146	21	A3A1A7W1J901
DBMF13W3S	91146	36	A3A8J1003
DBM13W3P	91146	34	A3A7P201
DCF37SC7F151	91146	36	A3A8J1007
DC37PC7F151	71468	21	A3A1A7W1P901
DDF50S12C7	91146	40	A4J1008
DD50PC7	71468	36	A3A8P1001
DD50924-1	71468	40	A4MP1
DE15PC7	91146	25	A3A3P1301
DE15PC7	91146	27	A3A4P1401

SECTION IV INDEX-FEDERAL STOCK NUMBER & REFERENCE NUMBER CROSS-REFERENCE TO FIGURE & ITEM NUMBER (Continued)

FEDERAL STOCK NUMBER	FIGURE NUMBER		ITEM NUMBER OR REF. DESIGNATION
REF NO.	MFG CO.	FIG NO.	ITEM NO. OR REF DES.
DE15PC7	91146	33	A3A6P101
DE9PC7	91146	23	A3A2P1205
DM15C100J01	84171	15	A3A1A4A3C513
DM15C100J01	84171	15	A3A1A4A3C530
DM15C150J01	84171	17	A3A1A5A1C404
DM15F511J03	84171	14	A3A1A4A2C506
DM19F152K03	84171	6	A3A1A2A1A1C806
DM19F152K03	84171	6	A3A1A2A1A1C811
DM19F152K03	84171	6	A3A1A2A1A1C817
DM19F622G0300WV4CR	84171	28	A3A4A2C1419
DM53740-5035	71468	34	A3A7P203
DM53740-5035	71468	34	A3A7P204
DM53740-5035	71468	34	A3A7P205
DM53740-5035	71468	36	A3A8P1002
DM53740-5035	71468	36	A3A8P1003
DM53740-5035	71468	36	A3A8P1004
DM53742-5004	71468	40	A4P1009
DM53742-5004	71468	40	A4P1010
DM53742-5004	71468	40	A4P1011
DM53743-5014	71468	36	A3A8J1009
DM53743-5014	71468	36	A3A8J1010
DM53743-5014	71468	36	A3A8J1011
DSH1001-1	99800	35	A3A7A3L204
DHS1001-1	99800	35	A3A7A3L205
E26COLOR	81349		W1
E26COLOR	81349		W2
E22COLOR	81349		W3
FS2816-3	71279	13	A3A1A4A4E2
FTSMITUR	98291		A3A1A3A6A1E1
FTSMITUR	98291		A3A1A3A7A1E1
FTSMITUR	98291		A3A1A3A8A1E1
FO2A250VAS	81349	36	A3A8F1001
FO2A250VAS	81349	36	A3A8F1002
FO2A250VAS	81349	36	A3A8F1003
GF2311-1	07294	37	A3A8A2FL1001
GX6-20P	95238	9	A3A1A3A5J601
GX6-20P	95238	13	A3A1A4W2J506
GX6-20P	95238	39	A3A8A1J1601
GX6-20S	95238	21	A3A1A7W1P902
GX6-20S	95238	21	A3A1A7W1P903
GX6-20S	95238	21	A3A1A7W1P904
GX6-20S	95238	36	A3A8P1008
G5983	01121	37	A3A8A2R1001
HP2N	09922	2	A1MP1
HP3N	09922	36	A3A8MP1
HP4N	09922	2	A1MP2
HP5N	09922	2	A1MP3
JF3P1SACD	81312	16	A3A1A5J402
JF3P1SACD	81312	19	A3A1A6J302
JF3S1PACD	81312	13	A3A1A4W2P507
JF3S1PACD	81312	21	A3A1A7W1P905
JN14-1265A	14101	6	A3A1A2A2FL801
KHTCM20E182J500V	84171	14	A3A1A4A2C514
KHTCM20E182J500V	84171	14	A3A1A4A2C531
KHTCM20E182J500V	84171	15	A3A1A4A3C504
KHTCM20E182J500V	84171	15	A3A1A4A3C510
KHTCM20E182J500V	84171	15	A3A1A4A3C523
KHTCM20E182J500V	84171	15	A3A1A4A3C527
L1431	94875	9	A3A1A3A5W1P604
L1431	94875	21	A3A1A7W1W1P907
L503	94875	21	A3A1A7W1W1P906
L503	94875	38	A3A8A1W1P1601
L503	94875	36	A3A8W3J1012
L503	94875	36	A3A8W3J1015
MC80V333AM	04222	29	A3A4A2C1401
MR05W100DCUA	81349	37	A3A8A2M1001
MS16225-16	96906	9	A3A1A3L604
MS16225-16	96906	9	A3A1A3L605
MS16225-16	96906	9	A3A1A3L607
MS16225-16	96906	9	A3A1A3L608
MS16225-16	96906	9	A3A1A3L611
MS16225-16	96906	9	A3A1A3L614
MS16225-16	96906	9	A3A1A3L618
MS16225-16	96906	35	A3A7A2L201
MS16225-16	96906	35	A3A7A2L202
MS16225-16	96906	35	A3A7A2L203
MS16225-16	96906	35	A3A7A2L206
MS16225-17	96906	20	A3A1A6A1L301
MS16225-17	96906	20	A3A1A6A1L303
MS16225-17	96906	20	A3A1A6L302
MS16225-17	96906	20	A3A1A6L304
MS16535-60	96906		A2A1A2MP1H1
MS16535-75	96906	27	A3A4A3MP1H2
MS16555-602	96906		A3A1A1A2A3H3
MS16555-602	96906		A3A1A4A1A2H1
MS16555-617	96906		A3A1A1A2A6MP3H4
MS16555-618	96906	22	A3A1A7A1A1H1
MS16555-627	96906	12	A3A1A4A1A3H1
MS16562-191	96906		A3A1A4A1A1H1
MS16562-192	96906		A3A1A1A2H2
MS16562-194	96906	37	A3A8A2A3MP3
MS16562-223	96906		A2A1A2MP2
MS16624-18	96906	8	A3A1A2A1H1
MS16632-1025	96906	8	A3A1A2A1H2
MS16632-1037	96906	12	A3A1A4A1A3H2
MS20365-440A	96906		A2MP1H4
MS20365-440A	96906	23	A3A2P1205H2
MS20365-440A	96906	27	A3A4P1401H2
MS20365-440A	96906	33	A3A6P101H2
MS20365-440A	96906	35	A3A7P201H2
MS20365-440A	96906	26	A3A3P1301H2
MS20365D440A	96906	2	A1A1H2
MS20365D440A	96906	2	A1A1S103EH2
MS20365D632A	96906		A2A1A2H6
MS20426AD2-4	96906		A3A8A2A1H3
MS20470AD3-4	96906		A3A8A2A1MP4H4
MS21044N04	96906	32	A3A5K1501H2
MS21044N04	96906	30	A3A5W1H2
MS21209-00420	96906		A3A1A1A2A3H1
MS21209-00815	96906		A3A8A2A1H1
MS21209C0415	96906		A3A8A2A1H2
MS25082-3	96906	35	A3A7CR208H1
MS25237-327	96906	2	A1DS101
MS25237-327	96906	2	A1DS102

FEDERAL STOCK NUMBER	FIGURE NUMBER		ITEM NUMBER OR REF. DESIGNATION
REF NO.	MFG CO.	FIG NO.	ITEM NO OR REF DES.
MS28775-022	96906	37	A3A8A2MP4
MS3112E12-10P	96906	41	A5J101
MS35200-14	96906	24	A3A2P1205H2
MS35200-23	96906		A2A1E1H8
MS35200-29	96906		A2A1A2H6
MS35206-201	96906	6	A3A1A2A1A1E3H1
MS35206-201	96906	6	A3A1A2A2E7H6
MS35206-202	96906	6	A3A1A2A2E8H2
MS35206-202	96906	4	A3A1A3A2H4
MS35206-202	96906	9	A3A1A3A3H5
MS35206-202	96906	9	A3A1A3A4H1
MS35206-202	96906	9	A3A1A3A6H1
MS35206-202	96906	9	A3A1A3A7H1
MS35206-202	96906	9	A3A1A3A8H1
MS35206-202	96906	9	A3A1A3A9H3
MS35206-202	96906	12	A3A1A4A2H1
MS35206-202	96906	12	A3A1A4A3H3
MS35206-202	96906	12	A3A1A4E14H2
MS35206-203	96906	6	A3A1A2A1A1E2H2
MS35206-204	96906	9	A3A1A3A3H4
MS35206-204	96906	9	A3A1A3A4H2
MS35206-204	96906	9	A3A1A3A6H2
MS35206-204	96906	9	A3A1A3A7H2
MS35206-204	96906	9	A3A1A3A8H2
MS35206-206	96906		A3A1A1S701E3H1
MS35206-206	96906		A3A1A1S702E3H1
MS35206-207	96906	21	A3A1A7W1H2
MS35206-210	96906	5	A3A1A1B701H2
MS35214-12	96906	4	A3A1A1H2
MS35214-12	96906	4	A3A1A3H2
MS35214-13	96906	4	A3A1A2H3
MS35214-13	96906	4	A3A1A4H2
MS35124-16	96906	4	A3A1A5H3
MS35214-4	96906	36	A3A8MP2H1
MS35216-1	96906	40	A4MP2H4
MS35216-12	96906	36	A3A8MP3H1
MS35216-23	96906		A2A1MP1H2
MS35216-23	96906		A2A1MP2H2
MS35216-3	96906	36	A3A8J1003H2
MS35216-3	96906	36	A3A8J1007H2
MS35216-3	96906	40	A4J1008H2
MS35333-74	96906	37	A3A8A2H2
MS35333-74	96906	37	A3A8A2R1001H1
MS35337-38	96906		A3A1A1A2A3MP2H2
MS35337-77	96906		A3A1A1A2MP22H1
MS35337-77	96906	5	A3A1A1MP4H1
MS35337-77	96906	5	A3A1A1MP5H1
MS35337-77	96906	21	A3A1A7W1H2
MS35337-77	96906	38	A3A8A1MP3H12
MS35337-77	96906	36	A3A8J1002H2
MS35337-77	96906	36	A3A8J1004H2
MS35337-77	96906	36	A3A8J1005H2
MS35337-77	96906	36	A3A8MP2H1
MS35337-77	96906	40	A4J1008H2
MS35337-77	96906	40	A4MP2H4
MS35337-78	96906		A3A1A1A2A4H3
MS35337-78	96906		A3A1A1A2A5H3
MS35337-79	96906		A2A1E1H8
MS35337-81	96906	16	A3A1A5H1
MS35337-81	96906	19	A3A1A6H2
MS35337-81	96906	31	A3A5A3E3H3
MS35337-98	96906	37	A3A8A2K1002H2
MS35338-77	96906	5	A3A1A1B701H2
MS35338-77	96906	9	A3A1A3A7E1H2
MS35338-77	96906	11	A3A1A3A8E611H2
MS35338-77	96906	9	A3A1A3A9E612H2
MS35338-78	96906	2	A1MP11H1
MS35338-78	96906	2	A1MP18H4
MS35338-78	96906	12	A3A1A4MP2H1
MS35338-78	96906	30	A3A5T1501H2
MS35338-78	96906	30	A3A5T1502H2
MS35338-78	96906	30	A3A5T1503H2
MS35338-78	96906	30	A3A5W1H1
MS35338-78	96906	36	A3A8MP3H11
MS35489-33	96906	37	A3A8A2H1
MS35649-22	96906	6	A3A1A2A1A1E2H2
MS35649-24	96906	5	A3A1A1MP6H4
MS35649-24	96906	11	A3A1A3A5K601H2
MS35649-24	96906	13	A3A1A4W2H2
MS35649-24	96906	26	A3A1R1332H2
MS35649-24	96906	28	A3A4A2R1436H2
MS35649-24	96906	33	A3A6A3R112H2
MS35649-24	96906	34	A3A7A2R211H2
MS35649-24	96906	35	A3A7A3R227H2
MS35649-24	96906	34	A3A7MP1H2
MS35649-24	96906	38	A3A8A1A1H4
MS35649-24	96906	38	A3A8A1J1601H4
MS35649-24	96906	36	A3A8J1001H2
MS35649-24	96906	36	A3A8J1002H2
MS35649-24	96906	36	A3A8J1004H2
MS35649-24	96906	36	A3A8J1005H2
MS35649-24	96906	36	A3A8MP1H2
MS35649-42	96906	7	A3A1A2A2XV803H1
MS35649-44	96906	2	A1J101H3
MS35649-44	96906	5	A3A1A1E1H4
MS35649-44	96906	5	A3A1A1K703H2
MS35649-44	96906	5	A3A1A1W1H2
MS35649-44	96906	6	A3A1A2A2FL801H4
MS35649-44	96906	27	A3A4K1401H2
MS35649-44	96906	34	A3A7A2K201H4
MS35649-44	96906	37	A3A8A2K1001H2
MS35649-44	96906	37	A3A8A2MP6H4
MS35649-64	96906		A2A1E1H8
MS35650-104	96906	31	A3A5A3E3H3
MS35650-304	96906	37	A3A8A2CR1002H1
MS35650-44	96906	2	A1J101H1
MS35672-2	96906		A3A1A1A2A1A1H1
MS35672-2	96906		A3A1A1A2A2A1H1
MS51053-102	96906		A3A1A1A2MP15H1
MS51053-102	96906		A3A1A1A2MP16H1
MS51053-102	96906		A3A1A1A2MP17H1
MS51053-102	96906		A3A1A1A2MP18H1

FEDERAL STOCK NUMBER	FIGURE NUMBER		ITEM NUMBER OR REF. DESIGNATION
REF NO.	MFG CO.	FIG NO.	ITEM NO OR REF DES.
MS51053-413	96906	2	A1MP6H2
MS51053-413	96906	2	A1MP7H1
MS51053-413	96906	2	A1MP8H1
MS51957-1	96906	6	A3A1A2A1A1H2
MS51957-1	96906	9	A3A1A3A7E1H2
MS51957-1	96906	11	A3A1A3A8E611H2
MS51957-1	96906	9	A3A1A3A9E612H2
MS51957-1	96906	27	A3A4E1H3
MS51957-11	96906	16	A3A1A5MP3H4
MS51957-11	96906	4	A3A1A6MP3H4
MS51957-12	96906	6	A3A1A2A1H5
MS51957-12	96906	6	A3A1A2A2FL801H4
MS51957-12	96906	13	A3A1A4MP3H1
MS51957-12	96906	4	A3A1A7MP2H8
MS51957-12	96906	31	A3A5A3H4
MS51957-12	96906	30	A3A5C1508H2
MS51957-12	96906	30	A3A5T1501H2
MS51957-12	96906	30	A3A5T1502H2
MS51957-12	96906	30	A3A5T1503H2
MS51957-13	96906		A3A1A1A2A4H3
MS51957-13	96906		A3A1A1A2A5H3
MS51957-13	96906	5	A3A1A1A3H1
MS51957-13	96906	5	A3A1A1E10H1
MS51957-13	96906	5	A3A1A1S701H2
MS51957-13	96906	5	A3A1A1S702H2
MS51957-13	96906	6	A3A1A2A2E6H3
MS51957-13	96906	7	A3A1A2MP3H2
MS51957-13	96906	37	A3A8A2A2H2
MS51957-13	96906	37	A3A8A2FL1001H2
MS51957-13	96906	37	A3A8A2FL1002H2
MS51957-14	96906	2	A1MP11H1
MS51957-14	96906	2	A1MP18H4
MS51957-14	96906		A3A1A4A1A2MP2H4
MS51957-14	96906	12	A3A1A4A2H2
MS51957-14	96906	12	A3A1A4A3H2
MS51957-15	96906	5	A3A1A1MP1H4
MS51957-15	96906	6	A3A1A2A2E5H1
MS51957-15	96906	7	A3A1A2A2XV803H1
MS51957-16	96906	2	A1J101H3
MS51957-16	96906		A2MP1H4
MS51957-16	96906	5	A3A1A1W1H2
MS51957-16	96906	16	A3A1A5A2H2
MS51957-17	96906	5	A3A1A1E1H4
MS51957-18	96906	4	A3A1A6H4
MS51957-2	96906		A3A1A1A2MP22H1
MS51957-2	96906	31	A3A5A3Q1501H2
MS51957-2	96906	31	A3A5A3Q1502H2
MS51957-2	96906	31	A3A5A3Q1503H2
MS51957-2	96906	32	A3A5A4H4
MS51957-20	96906		A3A1A1A2A3MP2H1
MS51957-21	96906		A3A1A1A2A3MP2H1
MS51957-3	96906	5	A3A1A1MP4H1
MS51957-3	96906	5	A3A1A1MP5H1
MS51957-3	96906	5	A3A1A1MP6H4
MS51957-3	96906	8	A3A1A2MP1H4
MS51957-3	96906	38	A3A8A1A2H13
MS51957-3	96906	38	A3A8A1MP3H12
MS51957-5	96906		A3A1A1S701E4H3
MS51957-5	96906		A3A1A1S702E4H1
MS51957-5	96906	35	A3A7A2R211H2
MS51957-5	96906	38	A3A8A1J1601H2
MS51957-6	96906	13	A3A1A4A4H4
MS51957-8	96906	25	A3A1R1332H2
MS51957-8	96906	29	A3A4A2R1436H2
MS51957-8	96906	34	A3A7A3R227H2
MS51957-8	96906	39	A3A8A1A2E2H4
MS51957-82	96906	19	A3A1A6A2H2
MS51957-9	96906	33	A3A6A3R112H2
MS51959-13	96906	2	A1MP16H20
MS51959-13	96906		A3A1A4A1A2MP3H4
MS51959-13	96906	12	A3A1A4MP2H1
MS51959-14	96906	2	A1MP11H1
MS51959-14	96906	2	A1MP14H2
MS51959-14	96906	2	A1MP15H2
MS51959-14	96906	22	A3A1A7A1A1MP2H9
MS51959-14	96906	21	A3A1A7E1H3
MS51959-14	96906	32	A3A5K1501H2
MS51959-14	96906	37	A3A8A2MP2H4
MS51959-15	96906	2	A1A1H4
MS51959-15	96906	27	A3A4P1401H2
MS51959-15	96906	31	A3A5MP1H2
MS51959-15	96906	30	A3A5W1H2
MS51959-15	96906	33	A3A6P101H2
MS51959-15	96906	34	A3A7P201H2
MS51959-15	96906	26	A3A3P1301H2
MS51959-18	96906	4	A3A1A2H3
MS51959-18	96906	4	A3A1A4H3
MS51959-2	96906	21	A3A1A7W1H2
MS51959-2	96906	31	A3A5E2H8
MS51959-2	96906	37	A3A8A2E4H11
MS51959-2	96906	37	A3A8A2E5H1
MS51959-2	96906	36	A3A8J1003H2
MS51959-2	96906	36	A3A8J1006H2
MS51959-2	96906	36	A3A8J1007H2
MS51959-20	96906	4	A3A1A1H3
MS51959-21	96906	4	A3A1A3H3
MS51959-3	96906		A3A1A1A2A6MP2H4
MS51959-3	96906		A3A1A1A2A6MP3H4
MS51959-3	96906	9	A3A1A3A5J601H2
MS51959-3	96906	11	A3A1A3A5K601H2
MS51959-3	96906	4	A3A1A4MP1H4
MS51959-3	96906	13	A3A1A4W2H2
MS51959-4	96906	1	A2MP2H2
MS51959-4	96906		A3A1A1A2A3MP1H2
MS51959-47	96906	3	A3A1H5
MS51959-5	96906		A3A1A4E1H1
MS51959-5	96906	16	A3A1A5J402H1
MS51959-5	96906	19	A3A1A6J302H1
MS51959-5	96906	34	A3A7MP1H2
MS51959-5	96906	37	A3A8A2MP6H4
MS51959-5	96906	36	A3A8J1001H2
MS51959-5	96906	36	A3A8MP1H2
MS51959-6	96906	37	A3A8A2R1007H2
MS51959-6	96906	36	A3A8J1002H2
MS51959-6	96906	36	A3A8J1004H2
MS51959-6	96906	36	A3A8J1005H2

SECTION IV INDEX-FEDERAL STOCK NUMBER & REFERENCE NUMBER CROSS-REFERENCE TO FIGURE & ITEM NUMBER (Continued)

FEDERAL STOCK NUMBER	FIGURE NUMBER		ITEM NUMBER OR REF. DESIGNATION
REF NO.	MFG CO.	FIG NO.	ITEM NO. OR REF DES.
MS75008-35	96906	6	A3A1A2A1A1L805
MS75008-35	96906	38	A3A8A1A1L1609
MT1535ARC54	80058	1	A2
NE2	08108	5	A3A1A1DS701
NVC10GW	73899	17	A3A1A5A1C401
PM7	70309	37	A3A8A2S1002
PS1862	01281	29	A3A4A2C1415
PT02A24-61P	77820	2	A1J101
P1031	94375	7	A3A1A2A2W1P801
P1031	94375	9	A3A1A3A9W1P603
P1031	94375	9	A3A1A3W1P602
P1031	94375	9	A3A1A3W2P601
P1031	94375	13	A3A1A4W1P505
P1031	94375	23	A3A2W1P1203
P1031	94375	23	A3A2W2P1202
P1031	94375	39	A3A8A1W2P1602
P1031	94375	36	A3A8W1P1006
P1031	94375	36	A3A8W2P1007
RC07GF100J	81349	26	A3A3A2R1319
RCR07GF100K	81349	27	A3A4R1434
RC07GF101J	81349	10	A3A1A3A3R625
RC07GF101J	81349	29	A3A4A2R1414
RCR07GF101K	81349	25	A3A3A1R1304
RC07GF101K	81349	35	A3A7A3R203
RC07GF102J	81349	14	A3A1A4A2R510
RC07GF102K	81349	11	A3A1A3A6R601
RC07GF102K	81349	11	A3A1A3A8R605
RC07GF102K	81349	24	A3A2A2R1202
RC07GF102K	81349	24	A3A2A2R1207
RC07GF102K	81349	24	A3A2A3R1237
RC07GF102K	81349	24	A3A2A3R1239
RC07GF102K	81349	35	A3A7A2R213
RC07GF102K	81349	35	A3A7A3R217
RC07GF102K	81349	36	A3A8A3R1006
RC07GF103J	81349	10	A3A1A3A3R612
RC07GF103J	81349	10	A3A1A3A3R614
RC07GF103J	81349	10	A3A1A3A3R617
RC07GF103J	81349	10	A3A1A3A3R618
RC07GF103J	81349	10	A3A1A3A3R624
RC07GF103J	81349	14	A3A1A4A2R518
RC07GF103J	81349	14	A3A1A4A2R521
RC07GF103J	81349	14	A3A1A4A2R525
RC07GF103J	81349	15	A3A1A4A3R513
RC07GF103J	81349	33	A3A6A3R116
RC07GF103K	81349	11	A3A1A3A7R608
RC07GF103K	81349	11	A3A1A3A8R604
RC07GF103K	81349	11	A3A1A3A9R610
RC07GF103K	81349	24	A3A2A3R1224
RC07GF103K	81349	29	A3A4A2R1415
RC07GF103K	81349	28	A3A4A2R1420
RC07GF103K	81349	33	A3A6A2R125
RC07GF103K	81349	33	A3A6A2R131
RC07GF103K	81349	35	A3A7A3R204
RC07GF103K	81349	35	A3A7A3R212
RC07GF103K	81349	35	A3A7A3R215
RC07GF103K	81349	35	A3A7A3R221
RC07GF104K	81349	25	A3A3A1R1307
RC07GF104K	81349	26	A3A3A1R1329
RC07GF104K	81349	25	A3A3A1R1336
RC07GF104K	81349	25	A3A3A1R1337
RC07GF104K	81349	25	A3A3A1R1338
RC07GF120J	81349	2	A1R104
RC07GF122K	81349	24	A3A2A3R1228
RC07GF123J	81349	17	A3A1A5A1R402
RC07GF123J	81349	25	A3A3A1R1310
RC07GF123K	81349	7	A3A1A2A2R803
RC07GF123K	81349	7	A3A1A2A2R813
RC07GF123K	81349	20	A3A1A6A1R304
RC07GF123K	81349	24	A3A2A3R1225
RC07GF123K	81349	24	A3A2A3R1226
RC07GF123K	81349	24	A3A2A3R1227
RC07GF123K	81349	28	A3A4A2R1407
RC07GF124K	81349	25	A3A3A1R1328
RC07GF151J	81349	14	A3A1A4A2R508
RC07GF151J	81349	17	A3A1A5A1R406
RC07GF151K	81349	7	A3A1A2A2R806
RC07GF151K	81349	33	A3A6A3R120
RC07GF152J	81349	29	A3A4A2R1416
RC07GF152J	81349	27	A3A4R1433
RC07GF152K	81349	24	A3A2A2R1201
RC07GF152K	81349	24	A3A2A2R1206
RC07GF152K	81349	24	A3A2A2R1210
RC07GF152K	81349	24	A3A2A2R1211
RC07GF152K	81349	24	A3A2A2R1215
RC07GF152K	81349	23	A3A2A3R1221
RC07GF152K	81349	25	A3A3A2R1323
RC07GF152K	81349	35	A3A7A3R218
RC07GF152K	81349	35	A3A7A3R225
RC07GF153K	81349	24	A3A2A2R1213
RC07GF153K	81349	26	A3A3A1R1330
RC07GF153K	81349	35	A3A7A2R209
RC07GF181K	81349	35	A3A7A2R206
RC07GF182J	81349	10	A3A1A3A3R628
RC07GF182K	81349	24	A3A2A2R1212
RC07GF182K	81349	35	A3A7A2R210
RC07GF183J	81349	26	A3A3A1R1313
RC07GF183J	81349	26	A3A3A1R1314
RC07GF183J	81349	25	A3A3A2R1316
RC07GF183J	81349	25	A3A3A2R1317
RC07GF183J	81349	38	A3A8A1A1R1607
RC07GF220J	81349	33	A3A6A2R104
RC07GF221J	81349	14	A3A1A4A2R501
RC07GF221K	81349	24	A3A2A3R1229
RC07GF222J	81349	10	A3A1A3A3R622
RC07GF222J	81349	14	A3A1A4A2R524
RC07GF222J	81349	17	A3A1A5A1R404
RC07GF222K	81349	20	A3A1A6A1R305
RC07GF222K	81349	24	A3A2A2R1214
RC07GF222K	81349	24	A3A2A3R1234
RC07GF222K	81349	28	A3A4A2R1421
RC07GF222K	81349	30	A3A5A2R1504
RC07GF222K	81349	33	A3A6A2R132
RC07GF222K	81349	33	A3A6A2R133
RC07GF222K	81349	33	A3A6A2R134

SECTION IV INDEX-FEDERAL STOCK NUMBER & REFERENCE NUMBER CROSS-REFERENCE TO FIGURE & ITEM NUMBER (Continued)

FEDERAL STOCK NUMBER	FIGURE NUMBER		ITEM NUMBER OR REF. DESIGNATION
REF NO.	MFG CO.	FIG NO.	ITEM NO OR REF DES.
RC07GF222K	81349	33	A3A6A3R118
RC07GF222K	81349	33	A3A6A3R119
RC07GF222K	81349	33	A3A6A3R121
RC07GF222K	81349	35	A3A7A2R208
RC07GF223K	81349	7	A3A1A2A2R805
RC07GF223K	81349	11	A3A1A3A9R611
RC07GF223K	81349	24	A3A2A3R1219
RC07GF223K	81349	24	A3A2A3R1232
RC07GF223K	81349	29	A3A4A2R1418
RC07GF223K	81349	28	A3A4A2R1424
RC07GF224K	81349	24	A3A2A3R1235
RC07GF270J	81349	9	A3A1A3R629
RC07GF270J	81349	20	A3A1A6A1R307
RC07GF270J	81349	38	A3A8A1A1R1603
RC07GF270J	81349	38	A3A8A1A1R1606
RC07GF271J	81349	29	A3A4A2R1409
RC07GF271K	81349	7	A3A1A2A2R802
RC07GF271K	81349	25	A3A3A2R1324
RC07GF272J	81349	29	A3A4A2R1403
RC07GF272K	81349	26	A3A3A1R1305
RC07GF272K	81349	33	A3A6A2R101
RC07GF272K	81349	33	A3A6A3R122
RC07GF273J	81349	2	A1R102
RC07GF273J	81349	7	A3A1A2A2R809
RC07GF273J	81349	10	A3A1A3A3R616
RC07GF273J	81349	10	A3A1A3A3R626
RC07GF273J	81349	17	A3A1A5A1R403
RC07GF331J	81349	28	A3A4A2R1431
RC07GF331K	81349	2	A1R103
RC07GF331K	81349	24	A3A2A2R1204
RC07GF331K	81349	24	A3A2A2R1216
RC07GF331K	81349	25	A3A3A1R1331
RC07GF331K	81349	35	A3A7A3R201
RC07GF331K	81349	35	A3A7A3R202
RC07GF331K	81349	35	A3A7A3R216
RC07GF332K	81349	11	A3A1A3A7R609
RC07GF332K	81349	24	A3A2A2R1205
RC07GF332K	81349	24	A3A2A2R1209
RC07GF332K	81349	24	A3A2A3R1223
RC07GF332K	81349	24	A3A2A3R1236
RC07GF332K	81349	25	A3A3A1R1333
RC07GF332K	81349	29	A3A4A2R1425
RC07GF332K	81349	33	A3A6A3R117
RC07GF333J	81349	28	A3A4A2R1404
RC07GF333J	81349	35	A3A7A2R230
RC07GF333K	81349	24	A3A2A2R1244
RC07GF333K	81349	24	A3A2A3R1233
RC07GF333K	81349	24	A3A2A3R1242
RC07GF333K	81349	25	A3A3A1R1301
RC07GF333K	81349	26	A3A3A1R1334
RC07GF333K	81349	26	A3A3A1R1335
RC07GF333K	81349	26	A3A3A1R1341
RC07GF333K	81349	35	A3A7A3R214
RC07GF333K	81349	36	A3A8A3R1004
RC07GF391K	81349	28	A3A4A2R1405
RC07GF392J	81349	14	A3A1A4A2R505
RC07GF392J	81349	17	A3A1A5A1R401
RC07GF392J	81349	20	A3A1A6A1R302
RC07GF392K	81349	24	A3A2A2R1203
RC07GF392K	81349	24	A3A2A2R1208
RC07GF392K	81349	24	A3A2A3R1241
RC07GF392K	81349	33	A3A6A3R114
RC07GF392K	81349	35	A3A7A3R222
RC07GF393K	81349	33	A3A6A2R130
RC07GF394J	81349	7	A3A1A2A2R811
RC07GF431J	81349	28	A3A4A2R1417
RC07GF470J	81349	14	A3A1A4A2R511
RC07GF470J	81349	35	A3A7A2R207
RC07GF472J	81349	10	A3A1A3A3R620
RC07GF472J	81349	10	A3A1A3A3R627
RC07GF472J	81349	14	A3A1A4A2R506
RC07GF472J	81349	14	A3A1A4A2R509
RC07GF472J	81349	14	A3A1A4A2R522
RC07GF472J	81349	28	A3A4A2R1410
RC07GF472J	81349	29	A3A4A2R1426
RC07GF472K	81349	33	A3A6A2R102
RC07GF472K	81349	33	A3A6A2R105
RC07GF472K	81349	35	A3A7A3R226
RC07GF472K	81349	35	A3A7A3R228
RC07GF473J	81349	14	A3A1A4A2R519
RC07GF473J	81349	17	A3A1A5A1R405
RC07GF473J	81349	7	A3A1A2A2R801
RC07GF473K	81349	24	A3A2A3R1238
RC07GF473K	81349	26	A3A3A1R1302
RC07GF473K	81349	28	A3A4A2R1422
RC07GF473K	81349	36	A3A8A3R1003
RC07GF474K	81349	7	A3A1A2A2R812
RC07GF510J	81349	29	A3A4A2R1401
RC07GF560J	81349	39	A3A8A1A2R1601
RC07GF560J	81349	39	A3A8A1A2R1602
RC07GF561K	81349	13	A3A1A4A4R502
RC07GF561K	81349	24	A3A2A2R1217
RC07GF561K	81349	24	A3A2A3R1230
RC07GF561K	81349	25	A3A3A2R1322
RC07GF561K	81349	33	A3A6A2R126
RC07GF561K	81349	33	A3A6A2R128
RC07GF562J	81349	10	A3A1A3A3R619
RC07GF562J	81349	10	A3A1A3A3R623
RC07GF562J	81349	14	A3A1A4A2R512
RC07GF562J	81349	14	A3A1A4A2R514
RC07GF562J	81349	14	A3A1A4A2R520
RC07GF562J	81349	14	A3A1A4A2R526
RC07GF562J	81349	25	A3A3A2R1318
RC07GF562J	81349	26	A3A3A2R1320
RC07GF562J	81349	26	A3A3A2R1327
RC07GF562K	81349	11	A3A1A3A6R602
RC07GF562K	81349	11	A3A1A3A8R606
RC07GF562K	81349	29	A3A4A2R1406
RC07GF562K	81349	28	A3A4A2R1419
RC07GF562K	81349	28	A3A4A2R1423
RC07GF563J	81349	25	A3A3A1R1309
RC07GF564J	81349	36	A3A8A3R1002
RC07GF564J	81349	36	A3A8A3R1005
RC07GF680J	81349	14	A3A1A4A2R504

FEDERAL STOCK NUMBER	FIGURE NUMBER		ITEM NUMBER OR REF. DESIGNATION
REF NO.	MFG CO.	FIG NO.	ITEM NO OR REF DES.
RC07GF680J	81349	14	A3A1A4A2R515
RC07GF680J	81349	26	A3A3A2R1321
RC07GF680K	81349	20	A3A1A6A1R301
RC07GF682J	81349	10	A3A1A3A3R613
RC07GF682J	81349	11	A3A1A3A7R607
RC07GF682J	81349	11	A3A1A3A8R603
RC07GF682J	81349	14	A3A1A4A2R503
RC07GF682J	81349	14	A3A1A4A2R516
RC07GF682J	81349	20	A3A1A6A1R303
RC07GF682J	81349	24	A3A2A3R1218
RC07GF682J	81349	24	A3A2A3R1220
RC07GF682J	81349	24	A3A2A3R1222
RC07GF682J	81349	24	A3A2A3R1240
RC07GF682J	81349	25	A3A3A1R1303
RC07GF682J	81349	26	A3A3A1R1306
RC07GF682J	81349	25	A3A3A1R1311
RC07GF682J	81349	25	A3A3A1R1312
RC07GF682J	81349	28	A3A4A2R1408
RC07GF682J	81349	29	A3A4A2R1411
RC07GF682J	81349	29	A3A4A2R1427
RC07GF682J	81349	33	A3A6A2R103
RC07GF682J	81349	33	A3A6A2R127
RC07GF682J	81349	33	A3A6A3R115
RC07GF682J	81349	33	A3A6A3R135
RC07GF682K	81349	7	A3A1A2A2R807
RC07GF821K	81349	33	A3A6A2R123
RC07GF822J	81349	10	A3A1A3A3R615
RC07GF822J	81349	10	A3A1A3A3R621
RC07GF822J	81349	14	A3A1A4A2R523
RC07GF822J	81349	15	A3A1A4A3R507
RC07GF822J	81349	26	A3A3A1R1308
RC07GF822J	81349	26	A3A3A1R1339
RC07GF822J	81349	27	A3A4R1435
RC07GF822K	81349	20	A3A1A6A1R306
RC07GF822K	81349	28	A3A4A2R1428
RC07GF822K	81349	29	A3A4A2R1429
RC07GF822K	81349	29	A3A4A2R1430
RC07GF822K	81349	33	A3A6A2R129
RC07GF822K	81349	35	A3A7A3R219
RC07GF822K	81349	38	A3A8A1A1R1604
RC07GF822K	81349	38	A3A8A1A1R1605
RC07GF823K	81349	28	A3A4A2R1412
RC20GF333K	81349	30	A3A5A2R1510
RC20GF390K	81349	30	A3A5A2R1511
RC20GF391K	81349	29	A3A4A2R1432
RC20GF391K	81349	33	A3A6A2R124
RC20GF471K	81349	24	A3A2A3R1231
RC20GF471K	81349	24	A3A2A3R1243
RC20GF561J	81349	25	A3A3A1R1326
RC20GF561J	81349	25	A3A3A2R1325
RC32GF104K	81349	30	A3A5A2R1513
RC32GF104K	81349	30	A3A5A2R1514
RC32GF220K	81349	30	A3A5A2R1512
RC32GF331K	81349	7	A3A1A2A2R808
RC42GF472K	81349	30	A3A5A2R1501
RE65G1R00	81349	37	A3A8A2R1007
RG196AU	80085		W7
RN60D1781F	81349	33	A3A6A3R107
RN60D3161F	81349	33	A3A6A3R111
RN60D4871F	81349	33	A3A6A3R113
RN60D6811F	81349	33	A3A6A3R106
RN607151F	81349	14	A3A1A4A2R517
RN60D9531F	81349	33	A3A6A3R109
RW57V141	00213	32	A3A5R1502
RW57V141	00213	32	A3A5R1503
RW59VR39	81349	30	A3A5A2R1515
RW59V271	81349	21	A3A1A7R901
RW67V270	81349	32	A3A5R1505
RW67V510	81349	7	A3A1A2A2R815
RW69V100	81349	31	A3A5A3R1506
RW69V100	81349	31	A3A5A3R1507
RW69V101	81349	35	A3A7A2R229
RW69V103	81349	7	A3A1A2A2R804
RW69V103	81349	7	A3A1A2A2R810
RW69V300	81349	7	A3A1A2A2R814
R3484X1-8CADPL	12014		A3A1A3A5A1MP1H1
R348X3-32CADPL	12014	5	A3A1A1A1MP2H1
R4008X5-32LG	12014	31	A3A5A1MP2H2
R4008X5-32LG	12014		A3A8A2A1MP3H1
SE33	61957		A3A1A3A7A1MP1H1
SE33	61957		A3A1A3A8A1MP1H1
SE34	61957		A3A1A3A9A1MP1H1
SFR1683MMEEK25	83086	41	A5MP2
SFR1683MMEEK25	83086	41	A5MP3
SFR1683MMEEK25	83086	41	A5MP4
SFR1683MMEEK25	83086	41	A5MP5
SFR1683MMEEK25	83086	41	A5MP6
SFR1683MMEEK25	83086	41	A5MP7
SKT10WHITE	98291	33	A3A6A1J102
SKT5BCWHITE	98291	24	A3A2A1J1201
SKT5BCWHITE	98291	24	A3A2A1J1202
SKT5BCWHITE	98291	24	A3A2A1J1203
SKT5BCWHITE	98291	27	A3A4A1J1401
SKT5BCWHITE	98291	27	A3A4A1J1402
SKT5BCWHITE	98291	32	A3A5A4J1501
SKT5BCWHITE	98291	32	A3A5A4J1502
SKT5BCWHITE	98291	32	A3A5A4J1503
SKT5BCWHITE	98291	32	A3A5A4J1504
SKT5BCWHITE	98291	32	A3A5A4J1505
SKT5BCWHITE	98291	32	A3A5A4J1506
SKT5BCWHITE	98291	33	A3A6A1J101
SKT5BCWHITE	98291	33	A3A6A1J103
SKT5BCWHITE	98291	34	A3A7A1J201
SKT5BCWHITE	98291	34	A3A7A1J202
SKT5BCWHITE	98291	34	A3A7A1J203
SKT5BCWHITE	98291	34	A3A7A1J204
SMB504306	70117	39	A3A8A1L1610
SMB549718	70117		A3A1A1A2A4MP1H2
SMB549718	70117		A3A1A1A2A5MP1H2
SMB549722-1	70117		A3A1A1S701MP4
SMB549722-1	70117		A3A1A1S702MP4
SMB549722-2	70117		A3A1A1S701MP5

FEDERAL STOCK NUMBER	FIGURE NUMBER		ITEM NUMBER OR REF. DESIGNATION
REF NO.	MFG CO.	FIG NO.	ITEM NO OR REF DES.
SMB549722-2	70117		A3A1A1S702MP5
SMB549723-1	70117	36	A3A8J1003H2
SMB549723-2	70117	36	A3A8J1007H2
SMB549725-1	70117	2	A1A1MP5
SMB549725-2	70117	2	A1A1MP6
SMB549725-3	70117	2	A1A1MP7
SMB549725-4	70117	2	A1A1MP8
SMB549726-1	70117	8	A3A1A2A1MP3
SMB549726-1	70117	8	A3A1A2A1MP4
SMB549726-2	70117	5	A3A1A1MP2
SMB549726-2	70117	5	A3A1A1MP3
SMB549727	70117	12	A3A1A4A1MP9
SMB549727	70117	12	A3A1A4A1MP10
SMB549733	70117		A3A1A5A2E2
SMB549736	70117	36	A3A8J1006H2
SMB549738	70117	14	A3A1A4E1
SMB549738	70117	21	A3A1A7E1
SMB549739	70117		A3A1A3A4A1H1
SMB549740	70117	18	A3A1A5A1E3
SMB549740	70117	19	A3A1A6A1E2
SMB549741	70117	2	A1A1E1
SMB549741	70117	2	A1A1E2
SMB549741	70117		A3A1A1S701E1
SMB549741	70117		A3A1A1S701E2
SMB549741	70117		A3A1A1S702E1
SMB549741	70117		A3A1A1S702E2
SMB549742	70117		A3A1A1A2A1H1
SMB549742	70117		A3A1A1A2A2H1
SMB549742-1	70117		A3A1A1A2H4
SMB549742-2	70117		A3A1A1A2H5
SMB549742-3	70117		A3A1A1A2H6
SMB549742-4	70117		A3A1A1A2H7
SMB549742-5	70117		A3A1A1A2H8
SMB549746	70117		A2A1MP3
SMB549747	70117	12	A3A1A4A1A3H4
SMB549748	70117		A3A1A1A2A1H3
SMB549748	70117		A3A1A1A2A2H3
SMB549750	70117	2	A1A1MP3
SMB549754	70117		A3A1A1A2MP24
SMB549756	70117		A3A1A1A2MP16
SMB549756	70117		A3A1A1A2MP17
SMB549757	70117		A3A1A1A2MP22
SMB549760	70117		A3A1A1A2A1H2
SMB549760	70117		A3A1A1A2A2H2
SMB549761	70117	12	A3A1A4A1A3H3
SMB549773	70117	8	A3A1A2MP4
SMB549774	70117	39	A3A8A1A2E2H4
SMB549775	70117	12	A3A1A4MP2
SMB549775	70117	13	A3A1A4MP3
SMB549775	70117	13	A3A1A4MP4
SMB549775	70117	13	A3A1A4MP5
SMB549775	70117	39	A3A8A1MP4
SMB549776	70117	5	A3A1A1MP7
SMB549777	70117	8	A3A1A2A1A2H1
SMB549778	70117		A3A1A1A2MP23
SMB549779	70117		A3A1A1A2MP25
SMB549780	70117		A3A1A4A1A2MP4
SMB549780	70117		A3A1A4A1A2MP5
SMB549781	70117		A2MP1
SMB549782	70117		A3A1A1A2A1MP3H1
SMB549782	70117		A3A1A1A2A2MP3H1
SMB549783	70117	26	A3A3MP2
SMB549783	70117	27	A3A4MP1
SMB549783	70117	30	A3A5MP2
SMB549783	70117	33	A3A6MP1
SMB549784	70117	8	A3A1A2A1A3MP2
SMB549784	70117	8	A3A1A2A1A4MP2
SMB549786	70117		A3A8A2A1MP1
SMB549787	70117		A3A1A1A2H1
SMB549788	70117		A3A1A3A4A1H2
SMB549788	70117		A3A1A3A6A1H1
SMB549788	70117		A3A1A3A7A1H1
SMB549788	70117		A3A1A3A8A1H1
SMB549789	70117		A3A1A3A5A1H2
SMB549789	70117		A3A1A3A9A1H2
SMB549790	70117	8	A3A1A2MP1
SMB549798-1	70117	5	A3A1A1E2
SMB549798-1	70117	5	A3A1A1E3
SMB549798-2	70117	5	A3A1A1E4
SMB549798-2	70117	5	A3A1A1E5
SMB549798-2	70117	5	A3A1A1E6
SMB549798-2	70117	5	A3A1A1E7
SMB549798-2	70117	5	A3A1A1E8
SMB549798-2	70117	5	A3A1A1E9
SMB549800	70117	2	A1MP6
SMB549801	70117	2	A1MP7
SMB549801	70117	2	A1MP8
SMB549803	70117		A3A1A4A1A2MP2
SMB549826	70117		A3A1A1A2MP28
SMB549827	70117	30	A3A5A1H1
SMB549831-1	70117	37	A3A8A2MP7
SMB549831-2	70117		A3A1A1A2MP26
SMB549831-3	70117	8	A3A1A2A1MP5
SMB549831-4	70117		A3A1A1A2MP27
SMB549866	70117	11	A3A1A3A6L616
SMB549869-2	70117		A3A1A5A2H1
SMB549876	70117	3	A3A8
SMB549884	70117	21	A3A1A7MP1
SMB549884	70117	39	A3A8A1MP2
SMB549888	70117		A2A1A2MP1
SMB549900	70117		A3A1A1A2A3A1H1
SMB549902	70117		A3A1A1S702MP1
SMB549903	70117		A3A1A1S702MP2
SMB549904	70117		A3A1A1S701MP1
SMB549905	70117		A3A1A1S702MP3
SMB549907	70117	37	A3A8A2A3H2
SMB549914-1	70117	5	A3A1A1MP4
SMB549914-2	70117	5	A3A1A1MP5
SMB549926-1	70117		A3A1A3A1MP2
SMB549926-2	70117		A3A1A3A2MP2
SMB549935-1	70117	21	A3A1A7MP3
SMB549935-2	70117	16	A3A1A5MP9
SMB549935-3	70117	19	A3A1A6MP9
SMB549939	70117		A3A1A2A1A2E1

SECTION IV INDEX-FEDERAL STOCK NUMBER & REFERENCE NUMBER CROSS-REFERENCE TO FIGURE & ITEM NUMBER (Continued)

FEDERAL STOCK NUMBER	FIGURE NUMBER		ITEM NUMBER OR REF. DESIGNATION
REF NO.	MFG CO.	FIG NO.	ITEM NO. OR REF DES.
SMB549939	70117		A3A1A2A1A2E2
SMB549939	70117		A3A1A2A1A2E3
SMB549940	70117	12	A3A1A4E10
SMB549940	70117	12	A3A1A4E11
SMB549940	70117	12	A3A1A4E12
SMB549940	70117	12	A3A1A4E13
SMB549940	70117	12	A3A1A4E8
SMB549940	70117	12	A3A1A4E9
SMB549943	70117	3	A3A1H5
SMB549946	70117	12	A3A1A4A1A3MP1
SMB549953	70117		A3A1A1S701E4
SMB549953	70117		A3A1A1S702E4
SMB549953	70117	27	A3A4E1
SMB549953	70117	31	A3A5E2
SMB549965	70117	12	A3A1A4A1MP5
SMB549965	70117	12	A3A1A4A1MP6
SMB549975	70117	8	A3A1A2A1A3
SMB549975	70117	8	A3A1A2A1A4
SMB549983	70117	38	A3A8A1W1
SMB549984	70117	9	A3A1A3A5W1
SMB549985-1	70117	13	A3A1A4W1
SMB549985-10	70117	36	A3A8W2
SMB549985-2	70117	9	A3A1A3W1
SMB549985-3	70117	9	A3A1A3A9W1
SMB549985-4	70117	9	A3A1A3W2
SMB549985-5	70117	23	A3A2W1
SMB549985-6	70117	7	A3A1A2A2W1
SMB549985-7	70117	38	A3A8A1W2
SMB549985-8	70117	23	A3A2W2
SMB549985-9	70117	36	A3A8W1
SMB549988	70117	36	A3A8W3
SMB549989	70117	21	A3A1A7W1W1
SMB550042-1	70117		A3A1A1S701E3
SMB550042-1	70117		A3A1A1S702E3
SMB550044	70117		A3A1A3A5A1E1
SMB550044	70117		A3A1A3A8A1E2
SMB550044	70117		A3A1A3A9A1E1
SMB550059	70117	2	A1A1S103EH2
SMB550060	70117	6	A3A1A2H2
SMB550063	70117	17	A3A1A5A1E2
SMB550063	70117	24	A3A2A2E1202
SMB550063	70117	24	A3A2A3E2
SMB550063	70117	26	A3A3A1E2
SMB550063	70117	26	A3A3A2E2
SMB550063	70117	28	A3A4A2E1403
SMB550063	70117	33	A3A6A2E2
SMB550063	70117	33	A3A6A3E2
SMB550063	70117	35	A3A7A2E2
SMB550063	70117	35	A3A7A3E2
SMB550069	70117		A3A1A4A1A2H2
SMB550070	70117	31	A3A5A3R1508
SMB550070	70117	31	A3A5A3R1509
SMB550073	70117	38	A3A8A1H1
SMB550074	70117	22	A3A1A7A1MP52
SMB550127	70117	19	A3A1A6A1
SMB550141	70117	20	A3A1A6A2L305H1
SMB550141	70117	20	A3A1A6A2L306H1
SMB550141	70117	20	A3A1A6A2L307H1
SMB550141	70117	20	A3A1A6A2L308H1
SMB550141	70117	20	A3A1A6A2L309H1
SMB550141	70117	20	A3A1A6A2L310H1
SMB550141	70117	20	A3A1A6A2L311H1
SMB550141	70117	20	A3A1A6A2L312H1
SMB550141	70117	20	A3A1A6A2L313H1
SMB550141	70117	20	A3A1A6A2L314H1
SMB550141	70117	20	A3A1A6A2L315H1
SMB550141	70117	20	A3A1A6A2L316H1
SMB550141	70117	20	A3A1A6A2L317H1
SMB550141	70117	20	A3A1A6A2L318H1
SMB550141	70117	20	A3A1A6A2L319H1
SMB550141	70117	20	A3A1A6A2L320H1
SMB550141	70117	20	A3A1A6A2L321H1
SMB550141	70117	20	A3A1A6A2L322H1
SMB550141	70117	20	A3A1A6A2L323H1
SMB550141	70117	20	A3A1A6A2L324H1
SMB550145	70117	38	A3A8A1A1H4
SMB550145	70117	38	A3A8A1J1601H2
SMB550146	70117	8	A3A1A2A1MP3H2
SMB550146	70117	8	A3A1A2A1MP4H2
SMB550147	70117	5	A3A1A1MP2H2
SMB550147	70117	5	A3A1A1MP3H2
SMB550148	70117	39	A3A8A1MP2H2
SMB550149	70117		A3A1A4A1A1MP3H3
SMB550149	70117	19	A3A1A6MP5H3
SMB550149	70117	22	A3A1A7A1MP33H3
SMB550149	70117	22	A3A1A7A1MP34H3
SMB550149	70117	22	A3A1A7A1MP35H3
SMB550150	70117	2	A1MP10H2
SMB550150	70117	2	A1MP9H2
SMB550151-1	70117	2	A1A1MP2H2
SMB550151-2	70117	4	A3A1A1H3
SMB550151-2	70117	4	A3A1A2H1
SMB550151-2	70117	4	A3A1A3H1
SMB550151-2	70117	4	A3A1A4H1
SMB550151-2	70117	4	A3A1A5H1
SMB550151-2	70117	4	A3A1A6H1
SMB550153-1	70117	37	A3MP1H2
SMB550153-2	70117	37	A3A8MP4H4
SMB550155-1	70117	6	A3A1A2A1A1H4
SMB550155-2	70117	16	A3A1A5MP5H1
SMB550156-1	70117	20	A3A1A6A2L305H1
SMB550156-1	70117	20	A3A1A6A2L306H1
SMB550156-1	70117	20	A3A1A6A2L307H1
SMB550156-1	70117	20	A3A1A6A2L308H1
SMB550156-1	70117	20	A3A1A6A2L309H1
SMB550156-1	70117	20	A3A1A6A2L310H1
SMB550156-1	70117	20	A3A1A6A2L311H1
SMB550156-1	70117	20	A3A1A6A2L312H1
SMB550156-1	70117	20	A3A1A6A2L313H1
SMB550156-1	70117	20	A3A1A6A2L314H1
SMB550156-1	70117	20	A3A1A6A2L315H1
SMB550156-1	70117	20	A3A1A6A2L316H1
SMB550156-1	70117	20	A3A1A6A2L317H1
SMB550156-1	70117	20	A3A1A6A2L318H1

FEDERAL STOCK NUMBER	FIGURE NUMBER		ITEM NUMBER OR REF. DESIGNATION
REF NO.	MFG CO.	FIG NO.	ITEM NO. OR REF DES.
SMB550156-1	70117	20	A3A1A6A2L319H1
SMB550156-1	70117	20	A3A1A6A2L320H1
SMB550156-1	70117	20	A3A1A6A2L321H1
SMB550156-1	70117	20	A3A1A6A2L322H1
SMB550156-1	70117	20	A3A1A6A2L323H1
SMB550156-1	70117	20	A3A1A6A2L324H1
SMB550156-2	70117		A3A1A1A2A3MP1H2
SMB550156-2	70117	36	A3A8A1H4
SMB550156-3	70117	2	A1A1S104H2
SMB550157-1	70117	34	A3A7A2K202H2
SMB550157-2	70117	23	A3A2A2H4
SMB550157-2	70117	23	A3A2A3H4
SMB550157-2	70117	25	A3A3A2T1302H4
SMB550157-2	70117	26	A3A3A1H4
SMB550157-2	70117	25	A3A3A1K1301H2
SMB550157-2	70117	26	A3A3A2H4
SMB550157-2	70117	26	A3A3A2T1301H4
SMB550157-2	70117	27	A3A4A2H4
SMB550157-2	70117	27	A3A4A3H4
SMB550157-2	70117	27	A3A4K1401H2
SMB550157-2	70117	30	A3A5A2H4
SMB550157-2	70117	33	A3A6A2H4
SMB550157-2	70117	33	A3A6A3H4
SMB550157-2	70117	34	A3A7A2H4
SMB550157-2	70117	35	A3A7A2K201H4
SMB550157-2	70117	34	A3A7A3H4
SMB550157-3	70117	35	A3A7A3T201H4
SMB550158-1	70117	9	A3A1A3A5H3
SMB550158-2	70117	21	A3A1A7H1
SMB550158-3	70117	21	A3A1A7W1H2
SMB550159-2	70117	2	A1J101H1
SMB550160	70117	37	A3A8A2K1002H2
SMB550161	70117		A3A1A1S701H1H2
SMB550161	70117		A3A1A1S702H1H2
SMB550163	70117	21	A3A1A7MP1H2
SMB550165-2	70117	2	A1R101
SMB550170	70117	2	A1R101H1
SMB550170	70117	37	A3A8A2R1001H1
SMB550171-1	70117	9	A3A1A3A5J601H2
SMB550172-1	70117	5	A3A1A1MP4H1
SMB550172-1	70117	5	A3A1A1MP5H1
SMB550172-1	70117	5	A3A1A1MP6H8
SMB550172-1	70117	11	A3A1A3A5K601H2
SMB550172-2	70117	2	A1A1S104H1
SMB550172-2	70117	2	A1J101H3
SMB550172-2	70117		A3A1A1A2A3MP2H2
SMB550172-2	70117	34	A3A7A3T201H4
SMB550172-2	70117	37	A3A8A2A2H2
SMB550173	70117		A3A8A2A2MP1H6
SMB550176	70117	6	A3A1A2A1A1MP2
SMB550176	70117	11	A3A1A3MP3
SMB550281-1	70117	37	A3MP1
SMB550282-1	70117	2	A1MP17
SMB550283-1	70117	1	A2MP2
SMB550284	70117	37	A3A8MP4
SMB550306	70117		A3A7A3E1
SMC504130	70117	2	A1MP17H2
SMC504619	70117	37	A3A8A2R1007H2
SMC549684	70117	13	A3A1A4L503
SMC549684	70117	13	A3A1A4L504
SMC549684	70117	13	A3A1A4L505
SMC549684	70117	13	A3A1A4L506
SMC549685	70117	12	A3A1A4A1A3
SMC549687	70117	4	A3A1A3A1
SMC549687-1	70117		A3A1A3A1MP1
SMC549689	70117	13	A3A1A4L501
SMC549689	70117	13	A3A1A4L502
SMC549700	70117		A3A1MP1
SMC549717	70117	22	A3A1A7A1MP43
SMC549720	70117	8	A3A1A2A1A3MP3
SMC549720	70117	8	A3A1A2A1A4MP3
SMC549721	70117	4	A3A1A3MP1
SMC549729	70117		A3A1A1A2MP18
SMC549730	70117		A3A1A4A1A1MP3
SMC549731	70117	12	A3A1A4A1MP7
SMC549732	70117		A3A1A5A2E3
SMC549734	70117		A3A1A5A2H3
SMC549735	70117	40	A4MP2
SMC549749	70117	37	A3A8A2MP5
SMC549751	70117	35	A3A7MP1
SMC549752	70117	2	A1MP16
SMC549753-1	70117	16	A3A1A5MP3
SMC549753-2	70117	20	A3A1A6MP3
SMC549762	70117	2	A1A1MP2
SMC549764-2	70117	2	A1MP11
SMC549764-3	70117	7	A3A1A2H1
SMC549765	70117		A3A1A1S701MP2
SMC549766	70117	22	A3A1A7A1MP44
SMC549766	70117	22	A3A1A7A1MP45
SMC549766	70117	22	A3A1A7A1MP46
SMC549767	70117	22	A3A1A7A1MP47
SMC549768	70117	22	A3A1A7A1MP48
SMC549768	70117	22	A3A1A7A1MP49
SMC549768	70117	22	A3A1A7A1MP50
SMC549769	70117	22	A3A1A7A1MP51
SMC549791	70117		A3A1A1A2H3
SMC549792-1	70117	33	A3A6H1
SMC549792-2	70117	23	A3A2H1
SMC549792-2	70117	25	A3A3H1
SMC549792-2	70117	27	A3A4H1
SMC549792-2	70117	32	A3A5H1
SMC549792-3	70117	34	A3A7H1
SMC549793-1	70117		A3A1A1A2A6MP2
SMC549793-2	70117		A3A1A1A2A6MP3
SMC549794	70117	2	A1MP4
SMC549795	70117		A3A1A1A2A6MP1
SMC549799	70117	2	A1A1MP4
SMC549802-1	70117	16	A3A1A5MP6
SMC549802-2	70117	16	A3A1A5MP7
SMC549802-3	70117	19	A3A1A6MP6
SMC549802-4	70117	19	A3A1A6MP7
SMC549806	70117		A2A1MP2
SMC549807	70117		A3A1A2A1A1MP1
SMC549808	70117		A3A1A5A2E4

FEDERAL STOCK NUMBER	FIGURE NUMBER		ITEM NUMBER OR REF. DESIGNATION
REF NO.	MFG CO.	FIG NO.	ITEM NO. OR REF DES.
SMC549808	70117		A3A1A5A2E5
SMC549809	70117	39	A3A8A1A2E2
SMC549810	70117		A3A1A1MP1
SMC549814	70117		A3A1A3A8A1
SMC549814-1	70117		A3A1A3A8A1MP2
SMC549820	70117	10	A3A1A3A3MP3
SMC549830	70117	37	A3A8A2MP3
SMC549832	70117		A3A1A1A2A1A1
SMC549832	70117		A3A1A1A2A2A1
SMC549833-1	70117		A3A1A1A2A4
SMC549833-2	70117		A3A1A1A2A5
SMC549834-1	70117		A3A1A1A2A4MP1
SMC549834-2	70117		A3A1A1A2A5MP1
SMC549838	70117	32	A3A5A4
SMC549838-1	70117	32	A3A5A4MP1
SMC549839	70117	27	A3A4A3
SMC549839-1	70117		A3A4A3MP2
SMC549840	70117	37	A3A8A2MP1
SMC549843	70117	2	A1MP10
SMC549843	70117	2	A1MP9
SMC549844-1	70117	38	A3A8A1L1602
SMC549844-1	70117	38	A3A8A1L1603
SMC549844-2	70117	38	A3A8A1L1604
SMC549844-3	70117	38	A3A8A1L1607
SMC549844-4	70117	38	A3A8A1L1601
SMC549844-4	70117	38	A3A8A1L1608
SMC549844-5	70117	38	A3A8A1L1606
SMC549844-6	70117	38	A3A8A1L1605
SMC549846	70117	9	A3A1A3A7
SMC549848	70117		A2A1A2
SMC549848-1	70117		A2A1A2MP3
SMC549848-2	70117		A2A1A2MP4
SMC549852	70117	3	A3MP2
SMC549853	70117	38	A3A8A1MP3
SMC549854	70117		A3A1A2A1A2MP1
SMC549857	70117		A3A1A1A2A1A1MP1
SMC549857	70117		A3A1A1A2A2A1MP1
SMC549859	70117	5	A3A1A1MP6
SMC549860	70117	37	A3A8A2MP6
SMC549863	70117	2	A1MP13
SMC549871	70117		A3A1A1A2A1MP2
SMC549871	70117		A3A1A1A2A1MP3
SMC549871	70117		A3A1A1A2A2MP2
SMC549871	70117		A3A1A1A2A2MP3
SMC549882	70117		A3A1A1A2A3MP1
SMC549885	70117	31	A3A5A3E2
SMC549886	70117		A3A1A1A2A3MP2
SMC549887	70117	16	A3A1A5MP5
SMC549889	70117		A3A1A3MP2
SMC549890	70117	9	A3A1A3E1
SMC549893	70117	5	A3A1A1E1
SMC549896	70117	31	A3A5MP1
SMC549897	70117	10	A3A1A3A3MP1
SMC549898	70117	10	A3A1A3A3MP2
SMC549905	70117		A3A1A1S701MP3
SMC549906	70117	19	A3A1A6MP5
SMC549915	70117		A3A1A1S701H1
SMC549915	70117		A3A1A1S702H1
SMC549916	70117	37	A3A8A2A2
SMC549916-1	70117		A3A8A2A2E1
SMC549928	70117	3	A3A9MP3
SMC549931	70117		A3A1A1A2A4MP2
SMC549931	70117		A3A1A1A2A5MP2
SMC549937-1	70117		A3A1A1A2MP1
SMC549937-1	70117		A3A1A1A2MP2
SMC549937-2	70117		A3A1A1A2MP3
SMC549937-2	70117		A3A1A1A2MP4
SMC549937-2	70117		A3A1A1A2MP5
SMC549937-3	70117		A3A1A1A2MP10
SMC549937-3	70117		A3A1A1A2MP6
SMC549937-3	70117		A3A1A1A2MP7
SMC549937-3	70117		A3A1A1A2MP8
SMC549937-3	70117		A3A1A1A2MP9
SMC549937-4	70117	16	A3A1A5MP1
SMC549937-4	70117	16	A3A1A5MP2
SMC549937-4	70117	22	A3A1A7A1MP1
SMC549937-4	70117	22	A3A1A7A1MP10
SMC549937-4	70117	22	A3A1A7A1MP11
SMC549937-4	70117	22	A3A1A7A1MP12
SMC549937-4	70117	22	A3A1A7A1MP13
SMC549937-4	70117	22	A3A1A7A1MP14
SMC549937-4	70117	22	A3A1A7A1MP15
SMC549937-4	70117	22	A3A1A7A1MP16
SMC549937-4	70117	22	A3A1A7A1MP2
SMC549937-4	70117	22	A3A1A7A1MP3
SMC549937-4	70117	22	A3A1A7A1MP4
SMC549937-4	70117	22	A3A1A7A1MP5
SMC549937-4	70117	22	A3A1A7A1MP6
SMC549937-4	70117	22	A3A1A7A1MP7
SMC549937-4	70117	22	A3A1A7A1MP8
SMC549937-4	70117	22	A3A1A7A1MP9
SMC549937-5	70117	12	A3A1A4A1MP1
SMC549937-5	70117	12	A3A1A4A1MP2
SMC549937-5	70117	12	A3A1A4A1MP3
SMC549937-5	70117	12	A3A1A4A1MP4
SMC549937-5	70117	19	A3A1A6MP1
SMC549937-5	70117	19	A3A1A6MP2
SMC549937-5	70117	22	A3A1A7A1MP17
SMC549937-5	70117	22	A3A1A7A1MP18
SMC549937-5	70117	22	A3A1A7A1MP19
SMC549937-5	70117	22	A3A1A7A1MP20
SMC549937-5	70117	22	A3A1A7A1MP21
SMC549937-5	70117	22	A3A1A7A1MP22
SMC549937-5	70117	22	A3A1A7A1MP23
SMC549937-5	70117	22	A3A1A7A1MP24
SMC549937-5	70117	22	A3A1A7A1MP25
SMC549937-5	70117	22	A3A1A7A1MP26
SMC549937-5	70117	22	A3A1A7A1MP27
SMC549937-5	70117	22	A3A1A7A1MP28
SMC549937-5	70117	22	A3A1A7A1MP29
SMC549937-5	70117	22	A3A1A7A1MP30
SMC549937-5	70117	22	A3A1A7A1MP31
SMC549937-5	70117	22	A3A1A7A1MP32
SMC549958	71785	7	A3A1A2A2XV803

SECTION IV INDEX-FEDERAL STOCK NUMBER & REFERENCE NUMBER CROSS-REFERENCE TO FIGURE & ITEM NUMBER (Continued)

FEDERAL STOCK NUMBER	FIGURE NUMBER		ITEM NUMBER OR REF. DESIGNATION
REF NO.	MFG CO.	FIG NO.	ITEM NO OR REF DES.
SMC549974	70117	37	A3A8A2S1003
SMC549976	70117	3	A3A9
SMC549981	70117	2	A1A1S103C
SMC550001	70117		A3A1A1S701C
SMC550001	70117		A3A1A1S702C
SMC550004	70117	2	A1A1S103A
SMC550004	70117		A1A1S103B
SMC550004	70117	2	A1A1S104
SMC550004	70117		A3A1A1S701A
SMC550004	70117		A3A1A1S702A
SMC55004-1	70117	20	A3A1A6A2L305
SMC550024-10	70117	20	A3A1A6A2L314
SMC550024-11	70117	20	A3A1A6A2L315
SMC550024-12	70117	20	A3A1A6A2L316
SMC550024-13	70117	20	A3A1A6A2L317
SMC550024-14	70117	20	A3A1A6A2L318
SMC550024-15	70117	20	A3A1A6A2L319
SMC550024-16	70117	20	A3A1A6A2L320
SMC550024-17	70117	20	A3A1A6A2L321
SMC550024-18	70117	20	A3A1A6A2L322
SMC550024-19	70117	20	A3A1A6A2L323
SMC550024-2	70117	20	A3A1A6A2L306
SMC55004-20	70117	20	A3A1A6A2L324
SMC550024-3	70117	20	A3A1A6A2L307
SMC550024-4	70117	20	A3A1A6A2L308
SMC550024-5	70117	20	A3A1A6A2L309
SMC550024-6	70117	20	A3A1A6A2L310
SMC550024-7	70117	20	A3A1A6A2L311
SMC550024-8	70117	20	A3A1A6A2L312
SMC550024-9	70117	20	A3A1A6A2L313
SMC550027	70117	2	A1A1S103D
SMC550027	70117		A3A1A1S701B
SMC550027	70117		A3A1A1S702B
SMC550029	70117	30	A3A5T1501
SMC550032	70117	2	A1A1S103E
SMC550047	70117	29	A3A4A2T1401
SMC550048	70117		A3A1A1A2A5K701
SMC550048	70117		A3A1A1A2A4K702
SMC550049	70117		A3A1A1A2A1MP1
SMC550049	70117		A3A1A1A2A2MP1
SMC550050	70117	5	A3A1A1A1
SMC550050-1	70117	5	A3A1A1A1MP1
SMC550052	70117	26	A3A3A2T1301
SMC550053	70117	38	A3A8A1A2K1601
SMC550053	70117	38	A3A8A1A2K1602
SMC550055	70117	37	A3A8A2FL1002
SMC550057	70117	34	A3A7A2K202
SMC550058	70117	37	A3A8A2K1002
SMC550061	70117	11	A3A1A3A5K601
SMC550066-1	70117	6	A3A1A2A2E1
SMC55006-2	70117	6	A3A1A2A2E2
SMC550071	70117	30	A3A5T1503
SMC550072	70117	34	A3A7A3T201
SMC550075	70117	22	A3A1A7A1MP53
SMC550077	70117	8	A3A1A2A1A2
SMC550078	70117		A3A1A1A2A6
SMC550080	70117	30	A3A5T1502
SMC550098	70117	36	A3A8S1001
SMC550101	70117	2	A1S101
SMC550102	70117	2	A1S102
SMD550140	70117	37	A3A8A2A1
SMD504616	70117	26	A3A3A1K1301
SMD504616	70117	27	A3A4K1401
SMD549671	70117	4	A3A1A1
SMD549672	70117	4	A3A1A2
SMD549673	70117	4	A3A1A3
SMD549674	70117	4	A3A1A4
SMD549675	70117	4	A3A1A5
SMD549676	70117	4	A3A1A6
SMD549677	70117	3	A3A2
SMD549678	70117	3	A3A3
SMD549679	70117	3	A3A4
SMD549680	70117	3	A3A5
SMD549681	70117	3	A3A6
SMD549682	70117	3	A3A7
SMD549683	70117	36	A3A8A1
SMD549686	70117	5	A3A1A1A2
SMD549688	70117	37	A3A8A2A3
SMD549688-1	70117		A3A8A2A3MP2
SMD549688-2	70117		A3A8A2A3MP1
SMD549690	70117	26	A3A3A1
SMD549691	70117	9	A3A1A3A3
SMD549692	70117	34	A3A7A2
SMD549693	70117	23	A3A2A2
SMD549694	70117	30	A3A5A2
SMD549695	70117	23	A3A2A3
SMD549696	70117	33	A3A6A2
SMD549697	70117	33	A3A6A3
SMD549698	70117	38	A3A8A1A1
SMD549701	70117		A2A1MP4
SMD549702	70117		A3A8A2A1MP5
SMD549705	70117		A3A1A5MP8
SMD549706	70117		A3A1A1A2A1A1MP2
SMD549706	70117		A3A1A1A2A2A1MP2
SMD549707	70117		A3A1A4A1A1MP4
SMD549709	70117		A3A1A1A2MP20
SMD549710	70117	12	A3A1A4A1MP8
SMD549710	70117	22	A3A1A7A1MP36
SMD549711-1	70117	22	A3A1A7A1MP37
SMD549711-2	70117	22	A3A1A7A1MP38
SMD549712	70117	22	A3A1A7A1MP39
SMD549713-1	70117	22	A3A1A7A1MP40
SMD549713-1	70117	22	A3A1A7A1MP41
SMD549713-2	70117	22	A3A1A7A1MP42
SMD549715	70117	22	A3A1A7A1MP33
SMD549715	70117	22	A3A1A7A1MP34
SMD549715	70117	22	A3A1A7A1MP35
SMD549815-1	70117		A3A1A4A1A1MP1
SMD549815-2	70117		A3A1A4A1A1MP2
SMD549816	70117		A3A1A6MP4
SMD549817	70117		A3A1A5MP4
SMD549819	70117		A3A1A1A2MP21

SECTION IV INDEX-FEDERAL STOCK NUMBER & REFERENCE NUMBER CROSS-REFERENCE TO FIGURE & ITEM NUMBER (Continued)

FEDERAL STOCK NUMBER	FIGURE NUMBER		ITEM NUMBER OR REF. DESIGNATION
REF NO.	MFG CO.	FIG NO.	ITEM NO OR REF DES.
SMD549824	70117		A3A1A1A2MP19
SMDSMD549826	70117		A3A1A1A2MP15
SMD549835	70117	9	A3A1A3A4
SMD549836	70117		A3A1A1A2A1
SMD549836	70117		A3A1A1A2A2
SMD549837	70117	9	A3A1A3A5
SMD549842	70117	36	A3A8MP2
SMD549845	70117	9	A3A1A3A6
SMD549847	70117	9	A3A1A3A8
SMD549849	70117	6	A3A1A2A1A1
SMD549850	70117		A3A4A1
SMD549850-1	70117		A3A4A1MP1
SMD549851	70117		A3A1A3A6A1
SMD549851-1	70117		A3A1A3A6A1MP1
SMD549855	70117		A3A1A3A9A1
SMD549855-1	70117		A3A1A3A9A1MP2
SMD549861	70117	19	A3A1A6MP8
SMD549864	70117		A3A1A4A1A2MP1
SMD549865	70117	9	A3A1A3A9
SMD549867	70117	36	A3A8MP3
SMD549868	70117		A3A1A7A1A1MP2
SMD549870	70117	4	A3A1A3A2
SMD549870-1	70117		A3A1A3A2MP1
SMD549872	70117	6	A3A1A2MP2
SMD549873	70117		A3A1A4A1A2MP3
SMD549874	70117		A1MP18
SMD549875	70117	12	A3A1A4A1
SMD549877-1	70117	6	A3A1A2A1A1L801
SMD549877-1	70117	6	A3A1A2A1A1L802
SMD549877-2	70117	6	A3A1A2A1A1L803
SMD549878	70117	5	A3A1A1S702
SMD549879	70117		A3A1A1A2A3A1
SMD549879-1	70117		A3A1A1A2A3A1MP1
SMD549880	70117	2	A1MP14
SMD549881	70117	2	A1MP15
SMD549883	70117		A3A1A4A1A3MP3
SMD549911	70117		A2A1A1
SMD549911-1	70117		A2A1A1MP2
SMD549917	70117	2	A1MP12
SMD549918	70117	5	A3A1A1S701
SMD549919	70117	6	A3A1A2A2
SMD549920	70117		A3A1A3A7A1
SMD549920-1	70117		A3A1A3A7A1MP2
SMD549921	70117		A3A1A3A4A1
SMD549921-1	70117		A3A1A3A4A1MP1
SMD549922	70117	4	A3A1A4MP1
SMD549923	70117		A3A1A7A1A1MP1
SMD549924	70117		A3A1A2A2MP1
SMD549925	70117	36	A3A8A2
SMD549929	70117	6	A3A1A2A1
SMD549930	70117		A3A1A3A5A1
SMD549930-1	70117		A3A1A3A5A1MP2
SMD549930-2	70117		A3A1A3A5A1MP1
SMD549932	70117		A3A2A1
SMD549932-1	70117		A3A2A1MP1
SMD549933	70117		A3A7A1
SMD549933-1	70117		A3A7A1MP1
SMD549934	70117		A3A5A1
SMD549934-1	70117	30	A3A5A1MP1
SMD549960	70117		A3A6A1
SMD549960-1	70117		A3A6A1MP1
SMD550076	70117		A3A3MP1
SMD550079	70117		A2A1
SMD550081	70117	12	A3A1A4A1A1
SMD550085	70117	31	A3A5A3
SMD550088	70117		A3A1A7A1A1
SMD550094	70117		A3A1A7MP2
SMD550095	70117		A3A8A1MP1
SMD550096	70117	7	A3A1A2MP3
SMD550099	70117	4	A3A1A7
SMD550100	70117		A3A9MP1
SMD550104	70117	8	A3A1A2A1C805A-C
SMD550113	70117	26	A3A3A2
SMD550114	70117	12	A3A1A4A2
SMD550115	70117	12	A3A1A4A3
SMD550116	70117	34	A3A7A3
SMD550117	70117	27	A3A4A2
SMD550118	70117	2	A1A1MP1
SMD550119	70117		A3A1A4A1A2
SMD550120	70117		A3A1A1A2A3
SMD550121	70117	9	A3A1A3C601
SMD550123	70117	5	A3A1A1A3
SMD550126	70117	16	A3A1A5A1
SMD550128	70117	16	A3A1A5A2
SMD550129	70117	38	A3A8A1A2
SMD550130	70117	19	A3A1A6A2
SMD550133	70117	21	A3A1A7A1
SMD550135	70117	13	A3A1A4W2
SMD550140	70117	37	A3A8A2A1
SMD550140-1	70117		A3A8A2A1MP2
SMD550175-1	70117	8	A3A1A2A1MP1
SMD550175-2	70117	8	A3A1A2A1MP2
SMD550178	70117	13	A3A1A4A4
SMD550288	70117		A3A3A1E1
SMD550290	70117		A3A6A2E1
SMD550291	70117		A3A6A3E1
SMD550292	70117		A3A2A2E1
SMD550293	70117		A3A2A3E1
SMD550294	70117		A3A1A6A1E1
SMD550295	70117		A3A1A4A3E1
SMD550296	70117		A3A1A5A1E1
SMD550297	70117		A3A1A6A2E1
SMD550298	70117		A3A1A4A2E1
SMD550299	70117		A3A1A4A4E1
SMD550300	70117		A3A5A2E1
SMD550301	70117		A3A5A3E1
SMD550302	70117		A3A8A1A2E1
SMD550303	70117		A3A8A1A1E1
SMD550304	70117		A3A1A3A3E1
SMD550305	70117		A3A7A2E1
SMD550307	70117		A3A1A5A2E1
SMD550308	70117		A3A4A2E1
SMD550309	70117		A3A3A2E1
SME549912	70117	36	A3A8A3

FEDERAL STOCK NUMBER	FIGURE NUMBER		ITEM NUMBER OR REF. DESIGNATION
REF NO.	MFG CO.	FIG NO.	ITEM NO. OR REF DES.
SMFBA2	01121		A3A1A5FL401
SMFBA2	01121		A3A1A5FL402
SR1PPK25-7	83086	8	A3A1A2A1A3MP1
SR1PPK25-7	83086	8	A3A1A2A1A4MP1
SR144PP	83036		A3A1A1A2MP11
SR144PP	83036		A3A1A1A2MP12
SR144PP	83036	12	A3A1A4A1A3MP2
SR155PP	83036		A3A1A1A2MP13
SR156PP	83036		A3A1A1A2MP14
STSM29	98291		A3A1A3A4A1E1
STSM29	98291		A3A1A3A6A1E2
STSM29	98291		A3A1A3A7A1E2
STSM29	98291		A3A1A3A8A1E3
STSM29	98291		A3A1A3A9A1E2
TL42E60C1	06743	23	A3A2A2FL1201
TWPC2A1-1PCT	93790	33	A3A6A3C106
TWPC2P22-1PCT	93790	33	A3A6A3C107
T0536	14433	31	A3A5C1508
UG625BU	81349	41	A5J102
VC22G	73899	6	A3A1A2A1A1C804
VC22G	73899	6	A3A1A2A1A1C812
VC22G	73899	6	A3A1A2A1A1C816
VC31GW	73899	15	A3A1A4A3C502
VC31GW	73899	15	A3A1A4A3C508
VC31GW	73899	15	A3A1A4A3C512
VC31GW	73899	15	A3A1A4A3C518
VC31GW	73899	15	A3A1A4A3C525
VC31GW	73899	15	A3A1A4A3C529
VC9GW	73899	11	A3A1A3A4C604
VC9GW	73899	11	A3A1A3A6C608
VC9GW	73899	11	A3A1A3A7C621
VC9GW	73899	11	A3A1A3A8C616
VC9GW	73899	11	A3A1A3A9C626
VK31CW222M	95275	10	A3A1A3A3C630
VK31CW222M	95275	10	A3A1A3A3C631
VK31CW222M	95275	10	A3A1A3A3C641
VK31CW222M	95275	10	A3A1A3A3C642
VK31CW472M	95275	10	A3A1A3A3C637
VK31CW562M	95275	11	A3A1A3A7C620
VK31CW562M	95275	11	A3A1A3A8C615
VK31CW562M	95275	11	A3A1A3A9C625
V1HOE8-5C	19070	37	A3A8A2B1001
WTE16A	90484		W4
WTE22A	90484		W5
WTE24A	90484		W6
X7470G91	80368	7	A3A1A2A2XV801
X7490C90	80368	7	A3A1A2A2XV802
0905-23	16636	5	A3A1A1B701
1-778-3	81860	-	A2A1E1
1A1A12	92825	7	A3A1A2A2E5
1A1A12	92825	7	A3A1A2A2E6
1N1200R	80131	37	A3A8A2CR1002
1N270	81349	35	A3A7A2CR201
1N270	81349	35	A3A7A2CR202
1N270	81349	35	A3A7A2CR203
1N270	81349	35	A3A7A2CR210
1N270	81349	35	A3A7A3CR205
1N270	81349	35	A3A7A3CR206
1N276	81349	10	A3A1A3A3CR601
1N276	81349	10	A3A1A3A3CR602
1N276	81349	10	A3A1A3A3CR603
1N276	81349	10	A3A1A3A3CR604
1N276	81349	10	A3A1A3A3CR605
1N276	81349	10	A3A1A3A3CR606
1N276	81349	10	A3A1A3A3CR607
1N276	81349	10	A3A1A3A3CR608
1N276	81349	14	A3A1A4A2CR501
1N276	81349	14	A3A1A4A2CR502
1N276	81349	14	A3A1A4A2CR503
1N276	81349	14	A3A1A4A2CR504
1N276	81349	14	A3A1A4A2CR505
1N276	81349	14	A3A1A4A2CR506
1N276	81349	14	A3A1A4A2CR507
1N276	81349	17	A3A1A5A1CR411
1N276	81349	20	A3A1A6A1CR301
1N276	81349	23	A3A2A3CR1201
1N276	81349	26	A3A3A1CR1301
1N276	81349	26	A3A3A1CR1302
1N276	81349	25	A3A3A1CR1303
1N276	81349	26	A3A3A1CR1304
1N276	81349	25	A3A3A1CR1310
1N276	81349	26	A3A3A1CR1311
1N276	81349	26	A3A3A1CR1312
1N276	81349	26	A3A3A1CR1313
1N276	81349	25	A3A3A1CR1314
1N276	81349	25	A3A3A1CR1317
1N276	81349	25	A3A3A1CR1319
1N276	81349	28	A3A4A2CR1403
1N276	81349	28	A3A4A2CR1406
1N276	81349	33	A3A6A3CR102
1N276	81349	33	A3A6A3CR103
1N276	81349	33	A3A6A3CR107
1N276	81349	35	A3A7A2CR211
1N276	81349	35	A3A7A2CR204
1N276	81349	38	A3A8A1A1CR1601
1N276	81349	38	A3A8A1A1CR1602
1N276	81349	38	A3A8A1A1CR1603
1N276	81349	38	A3A8A1A1CR1604
1N276	81349	36	A3A8A3CR1001
1N2982B	81349	35	A3A7CR208
1N3026B	81349	21	A3A1A7CR901
1N3026B	81349	23	A3A2A3CR1206
1N3026B	81349	29	A3A4A2CR1401
1N3034B	81349	5	A3A1A1CR702
1N3034B	81349	5	A3A1A1CR703
1N3189	81349	5	A3A1A1CR701
1N3189	81349	30	A3A5A2CR1502
1N3189	81349	30	A3A5A2CR1503
1N3189	81349	30	A3A5A2CR1508
1N3189	81349	41	A5CR101
1N3256	81349	30	A3A5A2CR1504
1N3256	81349	30	A3A5A2CR1505
1N3256	81349	30	A3A5A2CR1506

FEDERAL STOCK NUMBER	FIGURE NUMBER		ITEM NUMBER OR REF. DESIGNATION
REF NO.	MFG CO.	FIG NO.	ITEM NO OR REF DES.
1N3256	81349	30	A3A5A2CR1507
1N3324B	81349	32	A3A5CR1509
1N475	81349	27	A3A4CR1404
1N645	81349	25	A3A3A1CR1305
1N645	81349	25	A3A3A1CR1306
1N645	81349	27	A3A4CR1405
1N645	81349	30	A3A5A2CR1501
1N645	81349	30	A3A5A2CR1511
1N707A	82577	29	A3A4A2CR1402
1N707A	81349	30	A3A5A2CR1510
1N751A	81349	26	A3A3A2CR1309
1N753A	81349	23	A3A2A3CR1207
1N753A	81349	33	A3A6A2CR101
1N756A	81349	26	A3A3A1CR1318
1N757A	81349	33	A3A6A2CR105
1N757A	81349	33	A3A6A2CR106
1N816	81349	24	A3A2A3CR1202
1N816	81349	23	A3A2A3CR1203
1N816	81349	26	A3A3A1CR1316
1N914	81349	33	A3A6A2CR108
1N964	81349	25	A3A3A1CR1315
1N967B	81349	25	A3A3A1CR1308
1N967B	81349	26	A3A3A2CR1307
1N967B	81349	33	A3A6A2CR104
1N967B	81349	35	A3A7A2CR207
1N995M	81349	23	A3A2A3CR1204
1N995M	81349	23	A3A2A3CR1205
100-200-4-4	99378	41	A5MP41
101	75543	41	A5H3
10125	07047	10	A3A1A3A3E2
10125	07047	14	A3A1A4A2MP1
109054-325	06773	37	A3A8A2MP2
1214-05	78189	2	A1R101H1
1426A	88245	37	A3A8A2E1
150D104X9035A2	55289	28	A3A4A2C1405
1537-04	99800	11	A3A1A3A6L606
1537-04	99800	11	A3A1A3A7J613
1537-04	99800	11	A3A1A3A8L610
1614-13	83564	2	A1E102
1537-06	99800	10	A3A1A3A3L617
1537-52	99800	17	A3A1A5A1L405
1537-52	99800	17	A3A1A5A1L406
1704-03	78189	7	A3A1A2MP3H2
1720-02	78189	2	A1S101H1
1720-02	78189	2	A1S102H1
1902-00	78189	6	A3A1A2A1A1E2H2
1902-00	78189	6	A3A1A2A2E7H6
1902-00	78189	4	A3A1A3A2H4
1902-00	78189	9	A3A1A3A3H9
1902-00	78189	9	A3A1A3A4H3
1902-00	78189	9	A3A1A3A6H3
1902-00	78189	9	A3A1A3A7H3
1902-00	78189	9	A3A1A3A8H3
1902-00	78189	9	A3A1A3A9H3
1902-00	78189	12	A3A1A4E14H2
2N1099	81349	31	A3A5A3Q1501
2N1225	81349	10	A3A1A3A3Q604
2N1225	81349	11	A3A1A3A7Q602
2N1225	81349	11	A3A1A3A9Q603
2N1225	81349	14	A3A1A4A2Q501
2N1225	81349	14	A3A1A4A2Q502
2N1225	81349	14	A3A1A4A2Q503
2N1483	81349	30	A3A5A2Q1504
2N174	81349	31	A3A5A3Q1502
2N174	81349	31	A3A5A3Q1503
2N2219	81349	29	A3A4A2Q1402
2N2219	81349	28	A3A4A2Q1403
2N2996	01295	10	A3A1A3A3Q605
2N2996	01295	11	A3A1A3A8Q601
2N2996	01295	20	A3A1A6A1Q301
2N338	81349	17	A3A1A5A1Q401
2N338	81349	24	A3A2A2Q1201
2N338	81349	24	A3A2A2Q1202
2N338	81349	24	A3A2A2Q1203
2N338	81349	24	A3A2A2Q1204
2N338	81349	24	A3A2A3Q1205
2N338	81349	24	A3A2A3Q1210
2N338	81349	24	A3A2A3Q1206
2N338	81349	24	A3A2A3Q1207
2N338	81349	24	A3A2A3Q1208
2N338	81349	24	A3A2A3Q1209
2N338	81349	25	A3A3A1Q1301
2N338	81349	26	A3A3A1Q1302
2N338	81349	26	A3A3A1Q1303
2N338	81349	26	A3A3A1Q1307
2N338	81349	26	A3A3A2Q1304
2N338	81349	29	A3A4A2Q1401
2N338	81349	33	A3A6A2Q101
2N338	81349	33	A3A6A2Q105
2N338	81349	33	A3A6A2Q106
2N338	81349	33	A3A6A2Q107
2N338	81349	33	A3A6A3Q102
2N338	81349	33	A3A6A3Q103
2N338	81349	33	A3A6A3Q104
2N338	81349	34	A3A7A2Q203
2N338	81349	34	A3A7A2Q205
2N338	81349	34	A3A7A3Q204
2N498	81349	26	A3A3A2Q1305
2N498	81349	26	A3A3A2Q1306
2N526	81349	34	A3A7A3Q201
2N526	81349	34	A3A7A3Q206
20C109	56289	41	A5C144
20C109	56289	41	A5C145
2104-04-01-2520	78189	2	A1A1E3
22-178	06090		W8
22NM26	72962	1	A2MP2H2
22NM26	72962		A3A1A1S701E3H1
22NM26	72962		A3A1A1S702E3H1
22TD2	05010	25	A3A3A1RT1301
231-25-21-106	71785	5	A3A1A1W1P701
2404032W5P0401P	72982	11	A3A1A3A6C611
2404032W5P0401P	72982	11	A3A1A3A8C613
242352RK	76854	41	A5S103B

FEDERAL STOCK NUMBER	FIGURE NUMBER		ITEM NUMBER OR REF. DESIGNATION
REF NO.	MFG CO.	FIG NO.	ITEM NO OR REF DES.
242353RK	76854	41	A5S103C
242354RK	76854	41	A5S102A
242355RK	76854	41	A5S102B
242356RK	76854	41	A5S103A
2500-14	99800	14	A3A1A4A2L507
2500-14	99800	14	A3A1A4A2L508
2500-14	99800	14	A3A1A4A2L509
2500-14	99800	17	A3A1A5A1L404
2500-14	99800	23	A3A2A2L1203
2500-14	99800	23	A3A2A2L1204
2500-62	99800	23	A3A2A2L1201
2500-62	99800	23	A3A2A2L1202
2500-62	99800	23	A3A2A3L1206
2500-62	99800	28	A3A4A2L1402
2510-37	81541	34	A3A7A2K201
26R5-1	71286		A3A8A2A1MP4
26000W	71286	3	A3A9H1
2700-7	71286	3	A3A9MP2
27933	08742	26	A3A3A2T1302
27935	08742	33	A3A6A2L101
3P1190	99800	10	A3A1A3A3T601
3SAF1170	01526	32	A3A5K1501
3SAF1241	01526	5	A3A1A1K703
3SAF1241	01526	37	A3A8A2K1001
30-213	98278	36	A3A8CP1001
31-03	98278	11	A3A1A3A9J602
31-50	98278	6	A3A1A2A1A1J801
31-50	98278	34	A3A7J205
31-59	98278	14	A3A1A4A2J502
31-59	98278	14	A3A1A4A2J503
31-59	98278	13	A3A1A4A4J501
31-59	98278	13	A3A1A4A4J504
313-0132-00	13499	2	A1A1H6
313-0132-00	13499		A3A1A1A2A3MP2H1
313-0132-00	13499	12	A3A1A4MP2H1
313-0132-00	13499	26	A3A1K1301H2
313-0132-00	13499	34	A3A7A3T201H4
315L4AA32B299A	09134	25	A3A3A1C1304
315L4AA32B299A	09134	26	A3A3A1C1305
3242	98278	24	A3A2P1204
3242	98278	35	A3A7P202
33-42A1B8	98278	16	A3A1A5J401
33-42A1B8	98278	19	A3A1A6J301
3675-6R6-3735	23651	2	A1MP12H2
37-0316-00	95104	36	A3A8J1002
381-0362-00	13499	26	A3A3A1R1315
4007-4	77147	2	A1E1
4007-4	77147	23	A3A2E1
4007-4	77147	25	A3A3E1
4007-4	77147	27	A3A4E2
4007-4	77147	33	A3A6E1
4007-4	77147	34	A3A7E1
4007-6	77147	5	A3A1A1E10
4012	77147	31	A3A5E1
4021	77147	6	A3A1A2A1A1E1
4021	77147	31	A3A5A3E3
4021	77147	37	A3A8A2E2
4040-2HOTTINNED	77147	6	A3A1A2A1A1E2
4040-2HOTTINNED	77147	7	A3A1A2A2E3
4040-2HOTTINNED	77147	12	A3A1A4E14
4040-2HOTTINNED	77147	21	A3A1A7E2
4040-2HOTTINNED	77147	37	A3A8A2E3
4040-2HOTTINNED	77147	36	A3A8E1
4040-4HOTTINNED	77147	7	A3A1A2A2E4
4041	77147	34	A3A7E2
4051	71400		A3A8A2A2MP1
48327	72619	2	A1XDS101
48327	72619	2	A1XDS102
4873-1-0516	71279	9	A3A1A3A7E1
4873-1-0516	71279	21	A3A1A7E3
4873-1-0516	71279		A3A8A2E4
4878-1-0516	71279	6	A3A1A2A1A1E3
4878-1-0516	71279	7	A3A1A2A2E7
4878-1-0516	71279	7	A3A1A2A2E8
4878-1-0516	71279	11	A3A1A3A8E611
4878-1-0516	71279	9	A3A1A3A9E612
4878-1-0516	71279	37	A3A8A2E5
50-3561-0	92054	12	A3A1A4E2
50-3561-0	92054	12	A3A1A4E3
50-3561-0	92054	12	A3A1A4E4
50-3561-0	92054	12	A3A1A4E5
50-3561-0	92054	12	A3A1A4E6
50-3561-0	92054	12	A3A1A4E7
51-258	98278	24	A3A2P1201
51-258	98278	27	A3A4P1402
5100-25C	79136	19	A3A1A6H1
5101-16C	89462	8	A3A1A2A1H3
5101-50C	79136	8	A3A1A2A1A1H1
516-2557-001	13499	5	A3A1A1W1
516-2727-001	13499	30	A3A5W1
516-2742-001	70117	21	A3A1A7W1
53-358	98278	37	A3A8A2CP1002
53-358	98278	37	A3A8A2CP1003
5654-6AK5W	81349	6	A3A1A2A2V801
5659065-4A	02114	10	A3A1A3A3E601
5659065-4A	02114	10	A3A1A3A3E602
5659065-4A	02114	10	A3A1A3A3E603
5659065-4A	02114	10	A3A1A3A3E604
5659065-4A	02114	10	A3A1A3A3E605
5659065-4A	02114	10	A3A1A3A3E606
5659065-4A	02114	10	A3A1A3A3E607
5659065-4A	02114	10	A3A1A3A3E608
5659065-4A	02114	11	A3A1A3A8E609
5686	81349	6	A3A1A2A2V802
6002-42A	91506		A3A4A3MP1
6007-3A	91506	5	A3A1A1A1MP2
6008-7A	91506	31	A3A5A1MP2
6008-7A	91506		A3A8A2A1MP3
6009-8A	91506		A3A1A3A7A1MP1
6009-8A	91506		A3A1A3A9A1MP1
6013-15A	91506		A3A1A3A8A1MP1

FEDERAL STOCK NUMBER	FIGURE NUMBER		ITEM NUMBER OR REF. DESIGNATION
REF NO.	MFG CO.	FIG NO.	ITEM NO. OR REF DES.
60327-13	72619	2	A1E101
60327-13	72619	2	A1E102
65401713B3102M	53021	11	A3A1A3A4C605
65401713B3102M	53021	11	A3A1A3A4C606
65401713B3102M	53021	11	A3A1A3A6C612
68NC4-40	72962		A3A1A1A2A3H2
758-4785-001	13499	41	A5H1
758-4790-001	13499	41	A5MP10
758-4791-001	13499	41	A5MP11
758-4793-001	13499	41	A5MP12
758-4795-002	13499	41	A5A2J103
758-4810-001	95104	41	A5MP9
758-4820-001	13499	41	A5A2P1
8101-031U1G0509K	72982	11	A3A1A3A6C607
8101-031U1G0509K	72982	11	A3A1A3A6C609
8101-031U1G0509K	72982	11	A3A1A3A7C622
8101-031U1G0509K	72982	11	A3A1A3A7C643
8101-031U1G0509K	72982	11	A3A1A3A8C618
8111-038T2H0200G	72982	20	A3A1A6A1C305
8121-032C0H0270G	72982	10	A3A1A3A3C635
8121-032C0H0270G	72982	11	A3A1A3A9C627
8121-032P2G0470J	72982	11	A3A1A3A6C610
8121-032P2G0470J	72982	11	A3A1A3A7C623
8121-032P2G0470J	72982	11	A3A1A3A8C617
8121-032P2G0470J	72982	11	A3A1A3A8C628
8121-032U2J0131K	72982	20	A3A1A6A1C304
8121-033R3A0131K	72982	34	A3A7A3C220
8121-034U1G0510G	72982	15	A3A1A4A3C505
8121-034U1G0510G	72982	15	A3A1A4A3C509
8121-034U1G0510G	72982	15	A3A1A4A3C524
8121-034U1G0510G	72982	15	A3A1A4A3C526
8131-037T2H0131K	72982	11	A3A1A3A5C633
8131-037T2H0131K	72982	11	A3A1A3A5C644
8131-037T2H0131K	72982	28	A3A4A2C1416
8131-037U1G0101J	72982	15	A3A1A4A3C503
8131-037U1G0101J	72982		A3A1A4A3C511
8131-037U1G0101J	72982	15	A3A1A4A3C519
8131-037U1G0101J	72982	15	A3A1A4A3C528
8141-031P3K0511K	72982	34	A3A7A3C219
834	61957		A3A1A3A5A1H1
834	61957		A3A1A3A9A1H1
901	75543	6	A3A1A2A2H1
901	75543	38	A3A8A1H2
9383	73680	16	A3A1A5E1
9383	73680	20	A3A1A6E1
9936	03550	28	A3A4A2L1401

ADDITIONAL PART NUMBERS

REF NO.	MFG CO.	FIG NO.	ITEM NO. OR REF DES.
CC21CH220J	81349	43	A5C154
JN14-1558A	14101	41	A5J101
NAS1640-2	80205	41	A5H21
NAS1640-4	80205	41	A5H27
NAS1640-6	80205	41	A5H20
NAS671C4	80205	41	A5H22
MS15795-804	96906	41	A5H15
MS17160-3	96906		A5A1MP1
MS27035-625B	96906	41	A5J102
MS35489-1	96906	41	A5H3
MS51957-12	96906	41	A5H28
MS51957-14	96906	41	A5A1H35
MS51957-14	96906	41	A5H34
MS51957-45	96906	41	A5H30
MS51959-13	96906	41	A5A1H9
MS51959-13	96906	41	A5H31
MS51959-16	96906	41	A5H33
MS51959-2	96906	41	A5H11
MS51959-2	96906	41	A5H12
MS51959-29	96906	41	A5H32
SMB381419	80063	41	A5A2J103
SMB381426-2	80063	41	A5H13
SMB381427-2	80063	41	A5H14
SMB381431	80063	41	A5A1MP5
SMB381431	80063	41	A5A1MP6
SMB381431	80063	41	A5A1MP7
SMB381431	80063	41	A5A1MP8
SMB381462	80063		A5A1H6
SMB381463	80063	41	A5E104
SMB381472	80063		A5A2P1
SMB381482	80063	41	A5MP30
SMC381411	80063		A5MP25
SMC381428	80063	41	A5H25
SMC381438	80063	41	A5H1
SMC381441	80063	41	A5A3MP3
SMC381442	80063	41	A5MP11
SMC381444	80063	41	A5MP12
SMC381447	80063	41	A5B101
SMC381451-4	80063	41	A5MP17
SMC381457	80063	41	A5MP32
SMC381479	80063	41	A5E1
SMC504699	80063	41	A5E103
SMC620407	80063	41	A5MP34
SMD381416	80063	41	A5S102A
SMD381417	80063	41	A5S102B
SMD381418	80063	41	A5S103A
SMD381435	80063	41	A5MP10
SMD381440	80063	41	A5H2
SMD381445	80063	41	A5A1MP10
SMD381454-3	80063	41	A5L114
SMD381454-6	80063	41	A5L116
SMD381454-6	80063	41	A5L117
SMD381454-6	80063	41	A5L119
SMD381456	80063	41	A5MP1

FEDERAL STOCK NUMBER	FIGURE NUMBER		ITEM NUMBER OR REF. DESIGNATION
REF NO.	MFG CO.	FIG NO.	ITEM NO. OR REF DES.
SMD381469	80063	41	A5MP9
SMD381488	80063		A5A1MP4
SMD381489-1	80063		A5A1MP3MP1
SMD504621	80063	41	A5K101
SMD620400	80063	41	A5S101
SMD620379	80063	41	A5S103
100-200-4-4	99378		A5A1MP2
107047-1656	37695	41	A5H32
107070-502	37695	41	A5H5
158836-2	37695	41	A5MP33
20C109	01939	42	A5C144
20C109	01939	42	A5C145
3SAF1241	01526	41	A5K101
446719-1	37695	41	A5MP38
716465	37695	41	A5A2
716598-801	37695	42	A5S103
758-4795-002	13499	41	A5A2J103
758-4806-003	13499	41	A5L116
758-4806-006	13499	41	A5L126
758-4806-010	13499	41	A5L135
758-4806-011	13499	41	A5L136

SECTION v INDEX-REFERENCE DESIGNATION
CROSS-REFERENCE TO PAGE NUMBER

REFERENCE DESIGNATION	PAGE NUMBER
A1A1	4
A1A1E1	4
A1A1E2	4
A1A1E3	5
A1A1H2	4
A1A1H4	4
A1A1H6	4
A1A1MP1	4
A1A1MP2	4
A1A1MP2H2	4
A1A1MP3	4
A1A1MP4	4
A1A1MP5	4
A1A1MP6	4
A1A1MP7	4
A1A1MP8	4
A1A1S103A	4
A1A1S103B	4
A1A1S103C	4
A1A1S103D	4
A1A1S103E	4
A1A1S103EH2	5
A1A1S103EH2	5
A1A1S104	4
A1A1S104H1	4
A1A1S104H2	4
A1DS101	6
A1DS102	6
A1E1	7
A1E101	6
A1E102	6
A1J101	5
A1J101H1	5
A1J101H1	5
A1J101H3	5
A1J101H3	5
A1J101H3	5
A1J101H4	5
A1MP1	5
A1MP10	5
A1MP10H2	5
A1MP11	6
A1MP11H1	6
A1MP11H1	6
A1MP11H1	6
A1MP12	6
A1MP12H2	6
A1MP13	6
A1MP14	6
A1MP14H2	6
A1MP15	6
A1MP15H2	6
A1MP16	6
A1MP16H20	6
A1MP17	6
A1MP17H2	6
A1MP18	6
A1MP18H4	6
A1MP18H4	6
A1MP2	5
A1MP3	5
A1MP4	5
A1MP5	5
A1MP6	5
A1MP6H2	5
A1MP7	5
A1MP7H1	5
A1MP8	5
A1MP8H1	5
A1MP9	5
A1MP9H2	5
A1R101	7
A1R101H1	7
A1R101H1	7
A1R102	7
A1R103	7
A1R104	6
A1S101	7
A1S101H1	7
A1S101H1	7
A1S102	7
A1S102H1	7
A1S102H1	7
A1XDS101	6
A1XDS102	6
A2	7
A2A1	7
A2A1A1	8
A2A1A1MP1	8
A2A1A1MP2	8
A2A1A2	8
A2A1A2H6	8
A2A1A2H6	8
A2A1A2MP1	8
A2A1A2MP1H1	8
A2A1A2MP2	8
A2A1A2MP3	8
A2A1A2MP4	8
A2A1E1	7
A2A1E1H8	7
A2A1E1H8	7
A2A1E1H8	7
A2A1MP1	7
A2A1MP1H2	7
A2A1MP2	7
A2A1MP2H2	7
A2A1MP3	8
A2A1MP4	8
A2MP1	7
A2MP1H4	7
A2MP1H4	7
A2MP2	8
A2MP2H2	8

REFERENCE DESIGNATION	PAGE NUMBER
A2MP2H2	8
A3A1	8
A3A1A1	8
A3A1A1A1	9
A3A1A1A1MP1	9
A3A1A1A1MP2	9
A3A1A1A1MP2H2	9
A3A1A1A2	9
A3A1A1A2A1	10
A3A1A1A2A1A1	10
A3A1A1A2A1A1H1	10
A3A1A1A2A1A1MP1	10
A3A1A1A2A1A1MP2	10
A3A1A1A2A1H1	11
A3A1A1A2A1H2	11
A3A1A1A2A1H3	11
A3A1A1A2A1H3	11
A3A1A1A2A1MP1	10
A3A1A1A2A1MP2	10
A3A1A1A2A1MP3	10
A3A1A1A2A1MP3H1	10
A3A1A1A2A2	11
A3A1A1A2A2A1	11
A3A1A1A2A2A1H1	11
A3A1A1A2A2A1MP1	11
A3A1A1A2A2A1MP2	11
A3A1A1A2A2H1	11
A3A1A1A2A2H2	11
A3A1A1A2A2H3	11
A3A1A1A2A2MP1	11
A3A1A1A2A2MP2	11
A3A1A1A2A2MP3	11
A3A1A1A2A2MP3H1	11
A3A1A1A2A3	12
A3A1A1A2A3A1	12
A3A1A1A2A3A1H1	12
A3A1A1A2A3A1MP1	12
A3A1A1A2A3H1	12
A3A1A1A2A3H2	12
A3A1A1A2A3H3	12
A3A1A1A2A3MP1	12
A3A1A1A2A3MP1H2	12
A3A1A1A2A3MP1H2	12
A3A1A1A2A3MP2	12
A3A1A1A2A3MP2H1	12
A3A1A1A2A3MP2H1	12
A3A1A1A2A3MP2H1	12
A3A1A1A2A3MP2H2	12
A3A1A1A2A3MP2H2	12
A3A1A1A2A4	12
A3A1A1A2A4H3	12
A3A1A1A2A4H3	12
A3A1A1A2A4K702	12
A3A1A1A2A4MP1	13
A3A1A1A2A4MP1	13
A3A1A1A2A4MP1H2	13
A3A1A1A2A4MP2	13
A3A1A1A2A5	13
A3A1A1A2A5H3	13
A3A1A1A2A5H3	13
A3A1A1A2A5K701	13
A3A1A1A2A5MP1	13
A3A1A1A2A5MP1H2	13
A3A1A1A2A5MP2	13
A3A1A1A2A6	13
A3A1A1A2A6MP1	13
A3A1A1A2A6MP2	13
A3A1A1A2A6MP2H4	13
A3A1A1A2A6MP3	14
A3A1A1A2A6MP3H4	14
A3A1A1A2A6MP3H4	14
A3A1A1A2H1	11
A3A1A1A2H2	12
A3A1A1A2H3	12
A3A1A1A2H4	13
A3A1A1A2H5	13
A3A1A1A2H6	13
A3A1A1A2H7	13
A3A1A1A2H8	13
A3A1A1A2MP1	10
A3A1A1A2MP10	10
A3A1A1A2MP11	10
A3A1A1A2MP12	10
A3A1A1A2MP13	10
A3A1A1A2MP14	10
A3A1A1A2MP15	10
A3A1A1A2MP15H1	10
A3A1A1A2MP16	11
A3A1A1A2MP16H1	11
A3A1A1A2MP17	11
A3A1A1A2MP17H1	11
A3A1A1A2MP18	11
A3A1A1A2MP18	11
A3A1A1A2MP18H1	11
A3A1A1A2MP19	11
A3A1A1A2MP2	10
A3A1A1A2MP20	11
A3A1A1A2MP21	11
A3A1A1A2MP22	12
A3A1A1A2MP22H1	12
A3A1A1A2MP22H1	12
A3A1A1A2MP23	13
A3A1A1A2MP24	13
A3A1A1A2MP25	13
A3A1A1A2MP26	13
A3A1A1A2MP27	13
A3A1A1A2MP28	13
A3A1A1A2MP3	10
A3A1A1A2MP4	10
A3A1A1A2MP5	10
A3A1A1A2MP6	10
A3A1A1A2MP7	10
A3A1A1A2MP8	10
A3A1A1A2MP9	10
A3A1A1A3	14
A3A1A1A3H1	14

REFERENCE DESIGNATION	PAGE NUMBER
A3A1A1B701	14
A3A1A1B701H2	14
A3A1A1B701H2	14
A3A1A1CR701	15
A3A1A1CR702	14
A3A1A1CR703	14
A3A1A1DS701	14
A3A1A1E1	9
A3A1A1E1H4	9
A3A1A1E1H4	9
A3A1A1E10	16
A3A1A1E10H1	16
A3A1A1E10H1	16
A3A1A1E2	14
A3A1A1E3	14
A3A1A1E4	14
A3A1A1E5	14
A3A1A1E6	14
A3A1A1E7	14
A3A1A1E8	14
A3A1A1E9	14
A3A1A1H2	8
A3A1A1H3	8
A3A1A1H3	8
A3A1A1K703	14
A3A1A1K703H2	14
A3A1A1MP1	8
A3A1A1MP1H4	9
A3A1A1MP2	9
A3A1A1MP2H2	9
A3A1A1MP3	9
A3A1A1MP3H2	9
A3A1A1MP4	9
A3A1A1MP4H1	9
A3A1A1MP4H1	9
A3A1A1MP4H1	9
A3A1A1MP5	9
A3A1A1MP5H1	9
A3A1A1MP5H1	9
A3A1A1MP5H1	9
A3A1A1MP6	14
A3A1A1MP6H4	14
A3A1A1MP6H4	14
A3A1A1MP6H8	14
A3A1A1MP7	15
A3A1A1S701	15
A3A1A1S701A	16
A3A1A1S701B	16
A3A1A1S701C	16
A3A1A1S701E1	16
A3A1A1S701E2	16
A3A1A1S701E3	16
A3A1A1S701E3H1	16
A3A1A1S701E3H1	16
A3A1A1S701E4	16
A3A1A1S701E4H3	16
A3A1A1S701H1	16
A3A1A1S701H1H2	16
A3A1A1S701H2	15
A3A1A1S701MP1	15
A3A1A1S701MP2	15
A3A1A1S701MP3	16
A3A1A1S701MP4	16
A3A1A1S701MP5	16
A3A1A1S702	15
A3A1A1S702A	15
A3A1A1S702B	15
A3A1A1S702C	15
A3A1A1S702E1	15
A3A1A1S702E2	15
A3A1A1S702E3	15
A3A1A1S702E3H1	15
A3A1A1S702E3H1	15
A3A1A1S702E4	15
A3A1A1S702E4H1	15
A3A1A1S702H1	15
A3A1A1S702H1H2	15
A3A1A1S702H2	15
A3A1A1S702MP1	15
A3A1A1S702MP2	15
A3A1A1S702MP3	15
A3A1A1S702MP4	15
A3A1A1S702MP5	15
A3A1A1W1	9
A3A1A1W1H2	9
A3A1A1W1H2	9
A3A1A1W1P701	9
A3A1A2	16
A3A1A2A1	16
A3A1A2A1A1	17
A3A1A2A1A1C804	17
A3A1A2A1A1C806	17
A3A1A2A1A1C811	17
A3A1A2A1A1C812	17
A3A1A2A1A1C816	17
A3A1A2A1A1C817	17
A3A1A2A1A1E1	17
A3A1A2A1A1E2	17
A3A1A2A1A1E2H2	17
A3A1A2A1A1E2H2	17
A3A1A2A1A1E2H2	18
A3A1A2A1A1E3	18
A3A1A2A1A1E3H1	18
A3A1A2A1A1H1	17
A3A1A2A1A1H2	17
A3A1A2A1A1H4	17
A3A1A2A1A1J801	17
A3A1A2A1A1L801	17
A3A1A2A1A1L802	17
A3A1A2A1A1L803	17
A3A1A2A1A1L805	17
A3A1A2A1A1MP1	17
A3A1A2A1A1MP2	17
A3A1A2A1A2	18

REFERENCE DESIGNATION	PAGE NUMBER
A3A1A2A1A2E1	18
A3A1A2A1A2E2	18
A3A1A2A1A2E3	18
A3A1A2A1A2H1	18
A3A1A2A1A2MP1	18
A3A1A2A1A3	18
A3A1A2A1A3MP1	18
A3A1A2A1A3MP2	18
A3A1A2A1A3MP3	18
A3A1A2A1A4	18
A3A1A2A1A4MP1	18
A3A1A2A1A4MP2	18
A3A1A2A1A4MP3	18
A3A1A2A1C805A-C	17
A3A1A2A1H1	18
A3A1A2A1H2	18
A3A1A2A1H3	18
A3A1A2A1H5	17
A3A1A2A1MP1	17
A3A1A2A1MP2	17
A3A1A2A1MP3	18
A3A1A2A1MP3H2	18
A3A1A2A1MP4	18
A3A1A2A1MP4H2	18
A3A1A2A1MP5	18
A3A1A2A2	19
A3A1A2A2C801	19
A3A1A2A2C802	19
A3A1A2A2C803	19
A3A1A2A2C807	19
A3A1A2A2C808	19
A3A1A2A2C809	19
A3A1A2A2C810	19
A3A1A2A2C813	19
A3A1A2A2C814	19
A3A1A2A2C815	19
A3A1A2A2C819	19
A3A1A2A2C820	19
A3A1A2A2C821	19
A3A1A2A2C822	19
A3A1A2A2E1	20
A3A1A2A2E2	20
A3A1A2A2E3	21
A3A1A2A2E4	21
A3A1A2A2E5	21
A3A1A2A2E5H1	21
A3A1A2A2E6	21
A3A1A2A2E6H3	21
A3A1A2A2E6H3	21
A3A1A2A2E7	21
A3A1A2A2E7H6	21
A3A1A2A2E7H6	21
A3A1A2A2E8	21
A3A1A2A2E8H2	21
A3A1A2A2FL801	20
A3A1A2A2FL801H4	20
A3A1A2A2FL801H4	20
A3A1A2A2H1	20
A3A1A2A2MP1	19
A3A1A2A2R801	20
A3A1A2A2R802	20
A3A1A2A2R803	20
A3A1A2A2R804	20
A3A1A2A2R805	20
A3A1A2A2R806	20
A3A1A2A2R807	20
A3A1A2A2R808	20
A3A1A2A2R809	20
A3A1A2A2R810	20
A3A1A2A2R811	20
A3A1A2A2R812	20
A3A1A2A2R813	20
A3A1A2A2R814	20
A3A1A2A2R815	20
A3A1A2A2V801	19
A3A1A2A2V802	20
A3A1A2A2V803	19
A3A1A2A2W1	19
A3A1A2A2W1P801	19
A3A1A2A2XV801	21
A3A1A2A2XV802	21
A3A1A2A2XV803	20
A3A1A2A2XV803H1	20
A3A1A2A2XV803H1	20
A3A1A2H1	16
A3A1A2H1	19
A3A1A2H2	21
A3A1A2H3	16
A3A1A2H3	16
A3A1A2MP1	16
A3A1A2MP1H4	16
A3A1A2MP2	19
A3A1A2MP3	19
A3A1A2MP3H2	19
A3A1A2MP3H2	19
A3A1A2MP4	21
A3A1A3	21
A3A1A3A1	22
A3A1A3A1MP1	22
A3A1A3A1MP2	22
A3A1A3A2	22
A3A1A3A2H4	22
A3A1A3A2H4	22
A3A1A3A2MP1	22
A3A1A3A2MP2	22
A3A1A3A3	22
A3A1A3A3CR601	24
A3A1A3A3CR602	24
A3A1A3A3CR603	24
A3A1A3A3CR604	24
A3A1A3A3CR605	24
A3A1A3A3CR606	24
A3A1A3A3CR607	24
A3A1A3A3CR608	24

REFERENCE DESIGNATION	PAGE NUMBER
A3A1A3A3C630	23
A3A1A3A3C631	23
A3A1A3A3C632	23
A3A1A3A3C634	23
A3A1A3A3C635	23
A3A1A3A3C636	23
A3A1A3A3C637	23
A3A1A3A3C638	23
A3A1A3A3C639	23
A3A1A3A3C640	23
A3A1A3A3C641	23
A3A1A3A3C642	23
A3A1A3A3E1	23
A3A1A3A3E2	23
A3A1A3A3E601	23
A3A1A3A3E602	23
A3A1A3A3E603	23
A3A1A3A3E604	23
A3A1A3A3E605	23
A3A1A3A3E606	23
A3A1A3A3E607	23
A3A1A3A3E608	23
A3A1A3A3H4	22
A3A1A3A3H5	22
A3A1A3A3H9	22
A3A1A3A3L617	23
A3A1A3A3MP1	23
A3A1A3A3MP2	23
A3A1A3A3MP3	25
A3A1A3A3Q604	25
A3A1A3A3Q605	25
A3A1A3A3R612	24
A3A1A3A3R613	24
A3A1A3A3R614	24
A3A1A3A3R615	24
A3A1A3A3R616	24
A3A1A3A3R617	24
A3A1A3A3R618	24
A3A1A3A3R619	24
A3A1A3A3R620	24
A3A1A3A3R621	24
A3A1A3A3R622	24
A3A1A3A3R623	24
A3A1A3A3R624	24
A3A1A3A3R625	24
A3A1A3A3R626	24
A3A1A3A3R627	24
A3A1A3A3R628	24
A3A1A3A3T601	25
A3A1A3A4	25
A3A1A3A4A1	25
A3A1A3A4A1E1	25
A3A1A3A4A1H1	25
A3A1A3A4A1H2	25
A3A1A3A4A1MP1	25
A3A1A3A4C604	25
A3A1A3A4C605	25
A3A1A3A4C606	25
A3A1A3A4H1	25
A3A1A3A4H2	25
A3A1A3A4H3	25
A3A1A3A4L602	25
A3A1A3A5	25
A3A1A3A5A1	26
A3A1A3A5A1E1	26
A3A1A3A5A1H1	26
A3A1A3A5A1H2	26
A3A1A3A5A1MP1	26
A3A1A3A5A1MP1H1	26
A3A1A3A5A1MP2	26
A3A1A3A5C602	25
A3A1A3A5C603	25
A3A1A3A5C633	25
A3A1A3A5C644	26
A3A1A3A5C645	25
A3A1A3A5H3	25
A3A1A3A5J601	26
A3A1A3A5J601H2	26
A3A1A3A5J601H2	26
A3A1A3A5K601	26
A3A1A3A5K601H2	26
A3A1A3A5K601H2	26
A3A1A3A5K601H2	26
A3A1A3A5W1	25
A3A1A3A5W1P604	25
A3A1A3A6	26
A3A1A3A6A1	27
A3A1A3A6A1E1	27
A3A1A3A6A1E2	27
A3A1A3A6A1H1	27
A3A1A3A6A1MP1	27
A3A1A3A6C607	26
A3A1A3A6C608	26
A3A1A3A6C609	26
A3A1A3A6C610	26
A3A1A3A6C611	26
A3A1A3A6C612	26
A3A1A3A6H1	26
A3A1A3A6H2	26
A3A1A3A6H3	26
A3A1A3A6L603	27
A3A1A3A6L606	27
A3A1A3A6L616	27
A3A1A3A6R601	27
A3A1A3A6R602	27
A3A1A3A7	27
A3A1A3A7A1	27
A3A1A3A7A1E1	28
A3A1A3A7A1E2	28
A3A1A3A7A1H1	28
A3A1A3A7A1MP1	27
A3A1A3A7A1MP1H1	27
A3A1A3A7A1MP2	28
A3A1A3A7C619	27

REFERENCE DESIGNATION	PAGE NUMBER
A3A1A3A7C620	27
A3A1A3A7C621	27
A3A1A3A7C622	27
A3A1A3A7C623	27
A3A1A3A7C643	27
A3A1A3A7E1	28
A3A1A3A7E1H2	28
A3A1A3A7E1H2	28
A3A1A3A7H1	27
A3A1A3A7H2	27
A3A1A3A7H3	27
A3A1A3A7L612	27
A3A1A3A7L613	27
A3A1A3A7Q602	28
A3A1A3A7R607	28
A3A1A3A7R608	28
A3A1A3A7R609	28
A3A1A3A8	28
A3A1A3A8A1	29
A3A1A3A8A1E1	29
A3A1A3A8A1E2	29
A3A1A3A8A1E3	29
A3A1A3A8A1H1	29
A3A1A3A8A1MP1	29
A3A1A3A8A1MP1H1	29
A3A1A3A8A1MP2	29
A3A1A3A8C613	28
A3A1A3A8C614	28
A3A1A3A8C615	28
A3A1A3A8C616	28
A3A1A3A8C617	28
A3A1A3A8C618	28
A3A1A3A8C628	28
A3A1A3A8E609	28
A3A1A3A8E611	29
A3A1A3A8E611H2	29
A3A1A3A8E611H2	29
A3A1A3A8H1	28
A3A1A3A8H2	28
A3A1A3A8H3	28
A3A1A3A8L609	28
A3A1A3A8L610	28
A3A1A3A8Q601	29
A3A1A3A8R603	29
A3A1A3A8R604	29
A3A1A3A8R605	29
A3A1A3A8R606	29
A3A1A3A9	29
A3A1A3A9A1	30
A3A1A3A9A1E1	30
A3A1A3A9A1E2	30
A3A1A3A9A1H1	30
A3A1A3A9A1H2	30
A3A1A3A9A1MP1	30
A3A1A3A9A1MP1H1	30
A3A1A3A9A1MP2	30
A3A1A3A9C624	29
A3A1A3A9C625	29
A3A1A3A9C626	29
A3A1A3A9C627	29
A3A1A3A9E612	30
A3A1A3A9E612H2	30
A3A1A3A9E612H2	30
A3A1A3A9H3	29
A3A1A3A9H3	29
A3A1A3A9J602	30
A3A1A3A9L615	30
A3A1A3A9Q603	30
A3A1A3A9R610	30
A3A1A3A9R611	30
A3A1A3A9W1	29
A3A1A3A9W1P603	29
A3A1A3E1	21
A3A1A3H1	21
A3A1A3H2	21
A3A1A3H3	21
A3A1A3C601	22
A3A1A3C629	22
A3A1A3L604	22
A3A1A3L605	22
A3A1A3L607	22
A3A1A3L608	22
A3A1A3L611	22
A3A1A3L614	22
A3A1A3L618	22
A3A1A3MP1	22
A3A1A3MP2	22
A3A1A3MP3	22
A3A1A3R629	22
A3A1A3W1	21
A3A1A3W1P602	21
A3A1A3W2	21
A3A1A3W2P601	21
A3A1A4	30
A3A1A4A1	32
A3A1A4A1A1	32
A3A1A4A1A1H1	32
A3A1A4A1A1MP1	32
A3A1A4A1A1MP2	32
A3A1A4A1A1MP3	32
A3A1A4A1A1MP3H3	32
A3A1A4A1A1MP4	32
A3A1A4A1A2	32
A3A1A4A1A2H1	33
A3A1A4A1A2H2	33
A3A1A4A1A2MP1	33
A3A1A4A1A2MP2	33
A3A1A4A1A2MP2H4	33
A3A1A4A1A2MP3	33
A3A1A4A1A2MP3H4	33
A3A1A4A1A2MP4	33
A3A1A4A1A2MP5	33
A3A1A4A1A3	33
A3A1A4A1A3H1	33

REFERENCE DESIGNATION	PAGE NUMBER
A3A1A4A1A3H2	33
A3A1A4A1A3H3	33
A3A1A4A1A3H4	33
A3A1A4A1A3MP1	33
A3A1A4A1A3MP2	33
A3A1A4A1A3MP3	33
A3A1A4A1MP1	32
A3A1A4A1MP10	33
A3A1A4A1MP2	32
A3A1A4A1MP3	32
A3A1A4A1MP4	32
A3A1A4A1MP5	32
A3A1A4A1MP6	32
A3A1A4A1MP7	33
A3A1A4A1MP8	33
A3A1A4A1MP9	33
A3A1A4A2	33
A3A1A4A2CR501	35
A3A1A4A2CR502	36
A3A1A4A2CR503	36
A3A1A4A2CR504	36
A3A1A4A2CR505	36
A3A1A4A2CR506	36
A3A1A4A2CR507	36
A3A1A4A2C501	34
A3A1A4A2C506	34
A3A1A4A2C507	34
A3A1A4A2C514	34
A3A1A4A2C515	34
A3A1A4A2C516	34
A3A1A4A2C517	34
A3A1A4A2C520	34
A3A1A4A2C521	34
A3A1A4A2C522	34
A3A1A4A2C531	34
A3A1A4A2C532	34
A3A1A4A2C533	34
A3A1A4A2C534	34
A3A1A4A2C535	34
A3A1A4A2C536	34
A3A1A4A2C537	34
A3A1A4A2C538	34
A3A1A4A2C539	34
A3A1A4A2E1	33
A3A1A4A2H1	33
A3A1A4A2H2	33
A3A1A4A2J502	34
A3A1A4A2J503	34
A3A1A4A2L507	34
A3A1A4A2L508	34
A3A1A4A2L509	34
A3A1A4A2MP1	34
A3A1A4A2Q501	36
A3A1A4A2Q502	36
A3A1A4A2Q503	36
A3A1A4A2R501	35
A3A1A4A2R503	35
A3A1A4A2R504	35
A3A1A4A2R505	35
A3A1A4A2R506	35
A3A1A4A2R508	35
A3A1A4A2R509	35
A3A1A4A2R510	35
A3A1A4A2R511	35
A3A1A4A2R512	35
A3A1A4A2R514	35
A3A1A4A2R515	35
A3A1A4A2R516	35
A3A1A4A2R517	35
A3A1A4A2R518	35
A3A1A4A2R519	35
A3A1A4A2R520	35
A3A1A4A2R521	35
A3A1A4A2R522	35
A3A1A4A2R523	35
A3A1A4A2R524	35
A3A1A4A2R525	35
A3A1A4A2R526	35
A3A1A4A3	36
A3A1A4A3C502	37
A3A1A4A3C503	36
A3A1A4A3C504	36
A3A1A4A3C505	36
A3A1A4A3C508	37
A3A1A4A3C509	36
A3A1A4A3C510	37
A3A1A4A3C511	36
A3A1A4A3C512	37
A3A1A4A3C513	36
A3A1A4A3C518	37
A3A1A4A3C519	36
A3A1A4A3C523	37
A3A1A4A3C524	36
A3A1A4A3C525	37
A3A1A4A3C526	36
A3A1A4A3C527	37
A3A1A4A3C528	36
A3A1A4A3C529	37
A3A1A4A3C530	36
A3A1A4A3E1	36
A3A1A4A3H2	36
A3A1A4A3H3	36
A3A1A4A3R507	37
A3A1A4A3R513	37
A3A1A4A4	37
A3A1A4A4E1	37
A3A1A4A4E2	37
A3A1A4A4H4	37
A3A1A4A4J501	37
A3A1A4A4J504	37
A3A1A4A4R502	37
A3A1A4E1	30
A3A1A4E1H1	30
A3A1A4E10	31

REFERENCE DESIGNATION	PAGE NUMBER
A3A1A4E11	31
A3A1A4E12	31
A3A1A4E13	31
A3A1A4E14	32
A3A1A4E14H2	32
A3A1A4E14H2	32
A3A1A4E2	31
A3A1A4E3	31
A3A1A4E4	31
A3A1A4E5	31
A3A1A4E6	31
A3A1A4E7	31
A3A1A4E8	31
A3A1A4E9	31
A3A1A4H1	30
A3A1A4H2	30
A3A1A4H3	30
A3A1A4L501	31
A3A1A4L502	31
A3A1A4L503	31
A3A1A4L504	31
A3A1A4L505	31
A3A1A4L506	31
A3A1A4MP1	31
A3A1A4MP1H4	31
A3A1A4MP2	31
A3A1A4MP2H1	32
A3A1A4MP2H1	32
A3A1A4MP2H1	32
A3A1A4MP3	32
A3A1A4MP3H1	32
A3A1A4MP4	32
A3A1A4MP5	32
A3A1A4W1	30
A3A1A4W1P505	30
A3A1A4W2	30
A3A1A4W2H2	31
A3A1A4W2H2	31
A3A1A4W2J506	31
A3A1A4W2P507	31
A3A1A5	37
A3A1A5A1	38
A3A1A5A1CR411	40
A3A1A5A1C401	38
A3A1A5A1C402	38
A3A1A5A1C403	38
A3A1A5A1C404	38
A3A1A5A1C405	38
A3A1A5A1C406	38
A3A1A5A1C407	38
A3A1A5A1C408	38
A3A1A5A1C409	38
A3A1A5A1C410	38
A3A1A5A1C411	38
A3A1A5A1C412	38
A3A1A5A1C413	38
A3A1A5A1C434	38
A3A1A5A1E1	38
A3A1A5A1E2	39
A3A1A5A1E3	40
A3A1A5A1L401	38
A3A1A5A1L402	39
A3A1A5A1L403	38
A3A1A5A1L404	39
A3A1A5A1L405	39
A3A1A5A1L406	39
A3A1A5A1Q401	40
A3A1A5A1R401	40
A3A1A5A1R402	40
A3A1A5A1R403	40
A3A1A5A1R404	40
A3A1A5A1R405	40
A3A1A5A1R406	40
A3A1A5A1Y421	39
A3A1A5A1Y422	39
A3A1A5A1Y423	39
A3A1A5A1Y424	39
A3A1A5A1Y425	39
A3A1A5A1Y426	39
A3A1A5A1Y427	39
A3A1A5A1Y428	39
A3A1A5A1Y429	39
A3A1A5A1Y430	39
A3A1A5A1Y431	39
A3A1A5A1Y432	39
A3A1A5A1Y433	39
A3A1A5A1Y434	39
A3A1A5A1Y435	39
A3A1A5A1Y436	39
A3A1A5A1Y437	39
A3A1A5A1Y438	39
A3A1A5A1Y439	39
A3A1A5A1Y440	39
A3A1A5A2	40
A3A1A5A2E1	40
A3A1A5A2E2	40
A3A1A5A2E3	40
A3A1A5A2E4	40
A3A1A5A2E5	40
A3A1A5A2H1	40
A3A1A5A2H2	40
A3A1A5A2H2	40
A3A1A5A2H3	40
A3A1A5E1	38
A3A1A5FL401	38
A3A1A5FL402	38
A3A1A5H1	37
A3A1A5H1	41
A3A1A5H3	37
A3A1A5J401	38
A3A1A5J402	37
A3A1A5J402H1	37
A3A1A5MP1	37
A3A1A5MP2	37

REFERENCE DESIGNATION	PAGE NUMBER
A3A1A5MP3	38
A3A1A5MP3H4	38
A3A1A5MP4	38
A3A1A5MP5	40
A3A1A5MP5H1	40
A3A1A5MP6	40
A3A1A5MP7	40
A3A1A5MP8	40
A3A1A5MP9	40
A3A1A6	41
A3A1A6A1	41
A3A1A6A1CR301	43
A3A1A6A1C301	41
A3A1A6A1C302	41
A3A1A6A1C303	41
A3A1A6A1C304	41
A3A1A6A1C305	41
A3A1A6A1C306	41
A3A1A6A1C307	41
A3A1A6A1C308	41
A3A1A6A1E1	41
A3A1A6A1E2	42
A3A1A6A1L301	41
A3A1A6A1L303	41
A3A1A6A1Q301	43
A3A1A6A1R301	43
A3A1A6A1R302	42
A3A1A6A1R303	43
A3A1A6A1R304	42
A3A1A6A1R305	42
A3A1A6A1R306	43
A3A1A6A1R307	42
A3A1A6A1Y301	42
A3A1A6A1Y302	42
A3A1A6A1Y303	42
A3A1A6A1Y304	42
A3A1A6A1Y305	42
A3A1A6A1Y306	42
A3A1A6A1Y307	42
A3A1A6A1Y308	42
A3A1A6A1Y309	42
A3A1A6A1Y310	42
A3A1A6A1Y311	42
A3A1A6A1Y312	42
A3A1A6A1Y313	42
A3A1A6A1Y314	42
A3A1A6A1Y315	42
A3A1A6A1Y316	42
A3A1A6A1Y317	42
A3A1A6A1Y318	42
A3A1A6A1Y319	42
A3A1A6A1Y320	42
A3A1A6A2	43
A3A1A6A2E1	43
A3A1A6A2H2	43
A3A1A6A2L305	43
A3A1A6A2L305H1	43
A3A1A6A2L305H1	43
A3A1A6A2L306	43
A3A1A6A2L306H1	43
A3A1A6A2L306H1	43
A3A1A6A2L307	43
A3A1A6A2L307H1	43
A3A1A6A2L307H1	43
A3A1A6A2L308	43
A3A1A6A2L308H1	43
A3A1A6A2L308H1	43
A3A1A6A2L309	43
A3A1A6A2L309H1	43
A3A1A6A2L309H1	43
A3A1A6A2L310	43
A3A1A6A2L310H1	43
A3A1A6A2L310H1	44
A3A1A6A2L311	44
A3A1A6A2L311H1	44
A3A1A6A2L311H1	44
A3A1A6A2L312	44
A3A1A6A2L312H1	44
A3A1A6A2L312H1	44
A3A1A6A2L313	44
A3A1A6A2L313H1	44
A3A1A6A2L313H1	44
A3A1A6A2L314	44
A3A1A6A2L314H1	44
A3A1A6A2L314H1	44
A3A1A6A2L315	44
A3A1A6A2L315H1	44
A3A1A6A2L315H1	44
A3A1A6A2L316	44
A3A1A6A2L316H1	44
A3A1A6A2L316H1	44
A3A1A6A2L317	44
A3A1A6A2L317H1	44
A3A1A6A2L317H1	44
A3A1A6A2L318	44
A3A1A6A2L318H1	44
A3A1A6A2L318H1	44
A3A1A6A2L319	45
A3A1A6A2L319H1	45
A3A1A6A2L319H1	45
A3A1A6A2L320	45
A3A1A6A2L320H1	45
A3A1A6A2L320H1	45
A3A1A6A2L321	45
A3A1A6A2L321H1	45
A3A1A6A2L321H1	45
A3A1A6A2L322	45
A3A1A6A2L322H1	45
A3A1A6A2L322H1	45
A3A1A6A2L323	45
A3A1A6A2L323H1	45
A3A1A6A2L323H1	45
A3A1A6A2L324	45
A3A1A6A2L324H1	45

REFERENCE DESIGNATION	PAGE NUMBER
A3A1A6A2L324H1	45
A3A1A6E1	45
A3A1A6H1	41
A3A1A6H1	45
A3A1A6H2	46
A3A1A6H4	41
A3A1A6J301	41
A3A1A6J302	41
A3A1A6J302H1	41
A3A1A6L302	41
A3A1A6L304	41
A3A1A6MP1	41
A3A1A6MP2	41
A3A1A6MP3	41
A3A1A6MP3H4	41
A3A1A6MP4	45
A3A1A6MP5	45
A3A1A6MP5H3	45
A3A1A6MP6	45
A3A1A6MP7	45
A3A1A6MP8	46
A3A1A6MP9	46
A3A1A7	46
A3A1A7A1	47
A3A1A7A1A1	49
A3A1A7A1A1H1	49
A3A1A7A1A1MP1	49
A3A1A7A1A1MP2	49
A3A1A7A1A1MP2H9	49
A3A1A7A1MP1	47
A3A1A7A1MP10	47
A3A1A7A1MP11	47
A3A1A7A1MP12	47
A3A1A7A1MP13	47
A3A1A7A1MP14	47
A3A1A7A1MP15	47
A3A1A7A1MP16	47
A3A1A7A1MP17	47
A3A1A7A1MP18	47
A3A1A7A1MP19	48
A3A1A7A1MP2	47
A3A1A7A1MP20	48
A3A1A7A1MP21	48
A3A1A7A1MP22	48
A3A1A7A1MP23	48
A3A1A7A1MP24	48
A3A1A7A1MP25	48
A3A1A7A1MP26	48
A3A1A7A1MP27	48
A3A1A7A1MP28	48
A3A1A7A1MP29	48
A3A1A7A1MP3	47
A3A1A7A1MP30	48
A3A1A7A1MP31	48
A3A1A7A1MP32	48
A3A1A7A1MP33	48
A3A1A7A1MP33H3	48
A3A1A7A1MP34	48
A3A1A7A1MP34H3	48
A3A1A7A1MP35	48
A3A1A7A1MP35H3	48
A3A1A7A1MP36	48
A3A1A7A1MP37	48
A3A1A7A1MP38	48
A3A1A7A1MP39	48
A3A1A7A1MP4	47
A3A1A7A1MP40	48
A3A1A7A1MP41	49
A3A1A7A1MP42	49
A3A1A7A1MP43	49
A3A1A7A1MP44	49
A3A1A7A1MP45	49
A3A1A7A1MP46	49
A3A1A7A1MP47	49
A3A1A7A1MP48	49
A3A1A7A1MP49	49
A3A1A7A1MP5	47
A3A1A7A1MP50	49
A3A1A7A1MP51	49
A3A1A7A1MP52	49
A3A1A7A1MP53	49
A3A1A7A1MP6	47
A3A1A7A1MP7	47
A3A1A7A1MP8	47
A3A1A7A1MP9	47
A3A1A7CR901	49
A3A1A7C901	46
A3A1A7C902	46
A3A1A7C903	46
A3A1A7C904	46
A3A1A7C905	46
A3A1A7C906	46
A3A1A7E1	47
A3A1A7E1H3	47
A3A1A7E2	49
A3A1A7E3	49
A3A1A7H1	49
A3A1A7MP1	46
A3A1A7MP1H2	47
A3A1A7MP2	47
A3A1A7MP2H8	47
A3A1A7MP3	49
A3A1A7R901	47
A3A1A7W1	46
A3A1A7W1H2	46
A3A1A7W1H2	46
A3A1A7W1H2	46
A3A1A7W1H2	46
A3A1A7W1J901	46
A3A1A7W1P901	46
A3A1A7W1P902	46
A3A1A7W1P903	46
A3A1A7W1P904	46
A3A1A7W1P905	46

REFERENCE DESIGNATION	PAGE NUMBER
A3A1A7W1W1	46
A3A1A7W1W1P906	46
A3A1A7W1W1P907	46
A3A1H5	8
A3A1H5	8
A3A2	49
A3A2A1	50
A3A2A1J1201	50
A3A2A1J1202	50
A3A2A1J1203	50
A3A2A1MP1	50
A3A2A2	50
A3A2A2C1201	50
A3A2A2C1202	51
A3A2A2C1203	50
A3A2A2C1204	50
A3A2A2C1205	50
A3A2A2C1206	50
A3A2A2C1207	51
A3A2A2C1208	50
A3A2A2C1209	50
A3A2A2C1210	51
A3A2A2C1211	50
A3A2A2C1212	50
A3A2A2C1213	51
A3A2A2C1214	51
A3A2A2C1215	51
A3A2A2E1	50
A3A2A2E1202	51
A3A2A2FL1201	51
A3A2A2H4	50
A3A2A2L1201	51
A3A2A2L1202	51
A3A2A2L1203	51
A3A2A2L1204	51
A3A2A2Q1201	52
A3A2A2Q1202	52
A3A2A2Q1203	52
A3A2A2Q1204	52
A3A2A2R1201	51
A3A2A2R1202	51
A3A2A2R1203	52
A3A2A2R1204	51
A3A2A2R1205	51
A3A2A2R1206	51
A3A2A2R1207	51
A3A2A2R1208	52
A3A2A2R1209	52
A3A2A2R1210	51
A3A2A2R1211	51
A3A2A2R1212	51
A3A2A2R1213	51
A3A2A2R1214	51
A3A2A2R1215	51
A3A2A2R1216	51
A3A2A2R1217	52
A3A2A2R1244	52
A3A2A3	52
A3A2A3CR1201	54
A3A2A3CR1202	54
A3A2A3CR1203	54
A3A2A3CR1204	54
A3A2A3CR1205	54
A3A2A3CR1206	54
A3A2A3CR1207	54
A3A2A3C1216	53
A3A2A3C1217	52
A3A2A3C1218	52
A3A2A3C1219	52
A3A2A3C1220	52
A3A2A3C1221	53
A3A2A3C1222	52
A3A2A3C1223	53
A3A2A3C1224	53
A3A2A3C1225	52
A3A2A3C1226	52
A3A2A3C1227	52
A3A2A3C1228	52
A3A2A3C1229	53
A3A2A3C1230	52
A3A2A3C1231	52
A3A2A3C1232	52
A3A2A3C1233	52
A3A2A3E1	52
A3A2A3E2	53
A3A2A3H4	52
A3A2A3L1205	53
A3A2A3L1206	53
A3A2A3Q1205	54
A3A2A3Q1206	54
A3A2A3Q1207	54
A3A2A3Q1208	54
A3A2A3Q1209	54
A3A2A3Q1210	54
A3A2A3R1218	54
A3A2A3R1219	53
A3A2A3R1220	54
A3A2A3R1221	53
A3A2A3R1222	54
A3A2A3R1223	53
A3A2A3R1224	53
A3A2A3R1225	53
A3A2A3R1226	53
A3A2A3R1227	53
A3A2A3R1228	53
A3A2A3R1229	53
A3A2A3R1230	54
A3A2A3R1231	54
A3A2A3R1232	53
A3A2A3R1233	53
A3A2A3R1234	53
A3A2A3R1235	53
A3A2A3R1236	53
A3A2A3R1237	53

REFERENCE DESIGNATION	PAGE NUMBER
A3A2A3R1238	54
A3A2A3R1239	53
A3A2A3R1240	54
A3A2A3R1241	54
A3A2A3R1242	53
A3A2A3R1243	54
A3A2E1	54
A3A2H1	54
A3A2P1201	50
A3A2P1204	50
A3A2P1205	50
A3A2P1205H2	50
A3A2P1205H2	50
A3A2W1	49
A3A2W2	50
A3A2W2P1202	50
A3A2W1P1203	50
A3A3	54
A3A3A1	55
A3A3A1CR1301	57
A3A3A1CR1302	57
A3A3A1CR1303	57
A3A3A1CR1304	57
A3A3A1CR1305	57
A3A3A1CR1306	57
A3A3A1CR1308	57
A3A3A1CR1310	57
A3A3A1CR1311	57
A3A3A1CR1312	57
A3A3A1CR1313	57
A3A3A1CR1314	57
A3A3A1CR1315	57
A3A3A1CR1316	57
A3A3A1CR1317	57
A3A3A1CR1318	57
A3A3A1CR1319	57
A3A3A1C1301	55
A3A3A1C1302	55
A3A3A1C1303	55
A3A3A1C1304	55
A3A3A1C1305	55
A3A3A1C1316	55
A3A3A1C1317	55
A3A3A1C1318	55
A3A3A1C1319	55
A3A3A1C1321	55
A3A3A1E1	55
A3A3A1E2	55
A3A3A1H4	55
A3A3A1K1301	55
A3A3A1K1301H2	55
A3A3A1K1301H2	55
A3A3A1Q1301	57
A3A3A1Q1302	57
A3A3A1Q1303	57
A3A3A1Q1307	57
A3A3A1RT1301	56
A3A3A1R1301	56
A3A3A1R1302	56
A3A3A1R1303	56
A3A3A1R1304	55
A3A3A1R1305	56
A3A3A1R1306	56
A3A3A1R1307	55
A3A3A1R1308	56
A3A3A1R1309	56
A3A3A1R1310	56
A3A3A1R1311	56
A3A3A1R1312	56
A3A3A1R1313	56
A3A3A1R1314	56
A3A3A1R1315	56
A3A3A1R1326	56
A3A3A1R1328	56
A3A3A1R1329	55
A3A3A1R1330	56
A3A3A1R1331	56
A3A3A1R1332	57
A3A3A1R1332H2	57
A3A3A1R1332H2	57
A3A3A1R1333	56
A3A3A1R1334	56
A3A3A1R1335	56
A3A3A1R1336	55
A3A3A1R1337	56
A3A3A1R1338	56
A3A3A1R1339	56
A3A3A1R1341	56
A3A3A2	57
A3A3A2CR1307	58
A3A3A2CR1309	58
A3A3A2C1306	58
A3A3A2C1307	58
A3A3A2C1308	58
A3A3A2C1310	58
A3A3A2C1311	58
A3A3A2C1312	58
A3A3A2C1313	58
A3A3A2C1314	58
A3A3A2C1320	58
A3A3A2E1	58
A3A3A2E2	58
A3A3A2H4	58
A3A3A2Q1304	59
A3A3A2Q1305	59
A3A3A2Q1306	59
A3A3A2R1316	58
A3A3A2R1317	58
A3A3A2R1318	58
A3A3A2R1319	58
A3A3A2R1320	58
A3A3A2R1321	58
A3A3A2R1322	58
A3A3A2R1323	58

REFERENCE DESIGNATION	PAGE NUMBER
A3A3A2R1324	58
A3A3A2R1325	58
A3A3A2R1327	58
A3A3A2T1301	59
A3A3A2T1301H4	59
A3A3A2T1302	59
A3A3A2T1302H4	59
A3A3E1	59
A3A3H1	59
A3A3MP1	55
A3A3MP2	59
A3A3P1301	55
A3A3P1301H2	55
A3A3P1301H2	55
A3A4	59
A3A4A1	59
A3A4A1J1401	59
A3A4A1J1402	59
A3A4A1MP1	59
A3A4A2	59
A3A4A2CR1401	62
A3A4A2CR1402	62
A3A4A2CR1403	62
A3A4A2CR1406	62
A3A4A2C1401	60
A3A4A2C1402	60
A3A4A2C1403	60
A3A4A2C1404	60
A3A4A2C1405	60
A3A4A2C1406	60
A3A4A2C1407	60
A3A4A2C1408	60
A3A4A2C1409	59
A3A4A2C1410	60
A3A4A2C1411	60
A3A4A2C1412	60
A3A4A2C1413	60
A3A4A2C1414	60
A3A4A2C1415	62
A3A4A2C1416	60
A3A4A2C1417	60
A3A4A2C1418	60
A3A4A2C1419	60
A3A4A2C1420	60
A3A4A2C1421	60
A3A4A2C1422	60
A3A4A2C1424	60
A3A4A2E1	59
A3A4A2E1403	60
A3A4A2H4	59
A3A4A2L1401	60
A3A4A2L1402	60
A3A4A2Q1401	62
A3A4A2Q1402	62
A3A4A2Q1403	62
A3A4A2R1401	61
A3A4A2R1402	62
A3A4A2R1403	61
A3A4A2R1404	61
A3A4A2R1405	61
A3A4A2R1406	61
A3A4A2R1407	61
A3A4A2R1408	61
A3A4A2R1409	61
A3A4A2R1410	61
A3A4A2R1411	61
A3A4A2R1412	62
A3A4A2R1413	62
A3A4A2R1414	60
A3A4A2R1415	61
A3A4A2R1416	61
A3A4A2R1417	61
A3A4A2R1418	61
A3A4A2R1419	61
A3A4A2R1420	61
A3A4A2R1421	61
A3A4A2R1422	61
A3A4A2R1423	61
A3A4A2R1424	61
A3A4A2R1425	61
A3A4A2R1426	61
A3A4A2R1427	61
A3A4A2R1428	61
A3A4A2R1429	62
A3A4A2R1430	62
A3A4A2R1431	61
A3A4A2R1432	62
A3A4A2R1436	62
A3A4A2R1436H2	62
A3A4A2R1436H2	62
A3A4A2T1401	62
A3A4A3	62
A3A4A3H4	62
A3A4A3MP1	62
A3A4A3MP1H2	62
A3A4A3MP2	62
A3A4CR1404	63
A3A4CR1405	63
A3A4C1423	59
A3A4C1425	59
A3A4E1	63
A3A4E1H3	63
A3A4E2	63
A3A4H1	63
A3A4K1401	62
A3A4K1401H2	63
A3A4K1401H2	63
A3A4MP1	62
A3A4P1401	59
A3A4P1401H2	59
A3A4P1401H2	59
A3A4P1402	59
A3A4R1433	63
A3A4R1434	63

REFERENCE DESIGNATION	PAGE NUMBER
A3A4R1435	63
A3A5	63
A3A5A1	63
A3A5A1H1	64
A3A5A1MP1	63
A3A5A1MP2	63
A3A5A1MP2H2	64
A3A5A2	64
A3A5A2CR1501	64
A3A5A2CR1502	64
A3A5A2CR1503	64
A3A5A2CR1504	64
A3A5A2CR1505	64
A3A5A2CR1506	64
A3A5A2CR1507	64
A3A5A2CR1508	64
A3A5A2CR1510	65
A3A5A2CR1511	64
A3A5A2C1504	64
A3A5A2C1506	64
A3A5A2E1	64
A3A5A2E2	64
A3A5A2H4	64
A3A5A2Q1504	65
A3A5A2R1501	64
A3A5A2R1504	64
A3A5A2R1510	64
A3A5A2R1511	64
A3A5A2R1512	64
A3A5A2R1513	64
A3A5A2R1514	64
A3A5A2R1515	64
A3A5A3	65
A3A5A3C1502	65
A3A5A3C1503	65
A3A5A3E1	65
A3A5A3E2	65
A3A5A3E3	65
A3A5A3E3H3	65
A3A5A3E3H3	65
A3A5A3H4	65
A3A5A3Q1501	65
A3A5A3Q1501H2	65
A3A5A3Q1502	65
A3A5A3Q1502H2	65
A3A5A3Q1503	65
A3A5A3Q1503H2	65
A3A5A3R1506	65
A3A5A3R1507	65
A3A5A3R1508	65
A3A5A3R1509	65
A3A5A4	65
A3A5A4H4	65
A3A5A4J1501	65
A3A5A4J1502	66
A3A5A4J1503	66
A3A5A4J1504	66
A3A5A4J1505	66
A3A5A4J1506	66
A3A5A4MP1	66
A3A5CR1509	66
A3A5C1501	63
A3A5C1508	63
A3A5C1508H2	63
A3A5E1	66
A3A5E2	66
A3A5E2H8	66
A3A5H1	66
A3A5K1501	66
A3A5K1501H2	66
A3A5K1501H2	66
A3A5MP1	63
A3A5MP1H2	63
A3A5MP2	65
A3A5R1502	66
A3A5R1503	66
A3A5R1505	66
A3A5T1501	66
A3AST1501H2	66
A3A5T1501H2	66
A3A5T1502	66
A3A5T1502H2	66
A3A5T1502H2	67
A3A5T1503	66
A3A5T1503H2	66
A3A5T1503H2	66
A3A5W1	63
A3A5W1H1	63
A3A5W1H2	63
A3A5W1H2	63
A3A5W1P1501	63
A3A6	67
A3A6A1	67
A3A6A1J101	67
A3A6A1J102	67
A3A6A1J103	67
A3A6A1MP1	67
A3A6A2	67
A3A6A2CR101	68
A3A6A2CR104	68
A3A6A2CR105	68
A3A6A2CR106	68
A3A6A2CR108	68
A3A6A2C101	67
A3A6A2C102	67
A3A6A2C104	67
A3A6A2C111	67
A3A6A2C112	67
A3A6A2C113	67
A3A6A2C114	67
A3A6A2C115	67
A3A6A2E1	67
A3A6A2E2	67
A3A6A2H4	67

REFERENCE DESIGNATION	PAGE NUMBER
A3A6A2L101	67
A3A6A2Q101	68
A3A6A2Q105	68
A3A6A2Q106	68
A3A6A2Q107	68
A3A6A2R101	68
A3A6A2R102	68
A3A6A2R103	68
A3A6A2R104	68
A3A6A2R105	68
A3A6A2R123	68
A3A6A2R124	68
A3A6A2R125	67
A3A6A2R126	68
A3A6A2R127	68
A3A6A2R128	68
A3A6A2R129	68
A3A6A2R130	68
A3A6A2R131	67
A3A6A2R132	68
A3A6A2R133	68
A3A6A2R134	68
A3A6A3	68
A3A6A3CR102	70
A3A6A3CR103	70
A3A6A3CR107	70
A3A6A3C103	69
A3A6A3C105	69
A3A6A3C106	69
A3A6A3C107	69
A3A6A3C108	69
A3A6A3C109	69
A3A6A3C110	69
A3A6A3E1	69
A3A6A3E2	69
A3A6A3H4	69
A3A6A3Q102	70
A3A6A3Q103	70
A3A6A3Q104	70
A3A6A3R106	70
A3A6A3R107	70
A3A6A3R108	69
A3A6A3R109	70
A3A6A3R110	69
A3A6A3R111	70
A3A6A3R112	69
A3A6A3R112H2	69
A3A6A3R112H2	69
A3A6A3R113	70
A3A6A3R114	69
A3A6A3R115	69
A3A6A3R116	69
A3A6A3R117	69
A3A6A3R118	69
A3A6A3R119	69
A3A6A3R120	69
A3A6A3R121	69
A3A6A3R122	69
A3A6A3R135	69
A3A6E1	70
A3A6H1	70
A3A6MP1	70
A3A6P101	67
A3A6P101H2	67
A3A6P101H2	67
A3A7	70
A3A7A1	71
A3A7A1J201	71
A3A7A1J202	71
A3A7A1J203	71
A3A7A1J204	71
A3A7A1MP1	71
A3A7A2	71
A3A7A2CR201	72
A3A7A2CR202	72
A3A7A2CR203	72
A3A7A2CR204	72
A3A7A2CR207	72
A3A7A2CR210	72
A3A7A2CR211	72
A3A7A2C202	71
A3A7A2C203	71
A3A7A2C204	71
A3A7A2C205	71
A3A7A2C217	71
A3A7A2C221	71
A3A7A2E1	71
A3A7A2E2	71
A3A7A2H4	71
A3A7A2K201	71
A3A7A2K201H4	71
A3A7A2K201H4	71
A3A7A2K202	71
A3A7A2K202H2	72
A3A7A2L201	71
A3A7A2L202	71
A3A7A2L203	71
A3A7A2L206	71
A3A7A2Q203	72
A3A7A2Q205	72
A3A7A2R206	72
A3A7A2R207	72
A3A7A2R208	72
A3A7A2R209	72
A3A7A2R210	72
A3A7A2R211	72
A3A7A2R211H2	72
A3A7A2R211H2	72
A3A7A2R213	72
A3A7A2R229	72
A3A7A2R230	72
A3A7A3	72
A3A7A3CR205	74
A3A7A3CR206	74

REFERENCE DESIGNATION	PAGE NUMBER
A3A7A3C201	73
A3A7A3C206	72
A3A7A3C207	73
A3A7A3C208	73
A3A7A3C209	73
A3A7A3C210	73
A3A7A3C211	73
A3A7A3C212	73
A3A7A3C213	73
A3A7A3C214	73
A3A7A3C215	73
A3A7A3C216	73
A3A7A3C218	73
A3A7A3C219	73
A3A7A3C220	73
A3A7A3E1	72
A3A7A3E2	73
A3A7A3H4	72
A3A7A3L204	73
A3A7A3L205	73
A3A7A3Q201	74
A3A7A3Q204	74
A3A7A3Q206	74
A3A7A3R201	74
A3A7A3R202	74
A3A7A3R203	73
A3A7A3R204	73
A3A7A3R212	73
A3A7A3R214	74
A3A7A3R215	73
A3A7A3R216	74
A3A7A3R217	73
A3A7A3R218	73
A3A7A3R219	74
A3A7A3R221	73
A3A7A3R222	74
A3A7A3R224	74
A3A7A3R225	73
A3A7A3R226	74
A3A7A3R227	74
A3A7A3R227H2	74
A3A7A3R227H2	74
A3A7A3R228	74
A3A7A3T201	74
A3A7A3T201H4	74
A3A7A3T201H4	74
A3A7A3T201H4	74
A3A7CR208	74
A3A7CR208H1	74
A3A7CR208H1	74
A3A7E1	75
A3A7E2	75
A3A7H1	74
A3A7J205	70
A3A7MP1	70
A3A7MP1H2	70
A3A7MP1H2	70
A3A7P201	70
A3A7P201H2	70
A3A7P201H2	70
A3A7P202	71
A3A7P203	70
A3A7P204	70
A3A7P205	70
A3A8	75
A3A8A1	75
A3A8A1A1	76
A3A8A1A1CR1601	77
A3A8A1A1CR1602	77
A3A8A1A1CR1603	77
A3A8A1A1CR1604	77
A3A8A1A1C1620	77
A3A8A1A1C1621	77
A3A8A1A1C1622	77
A3A8A1A1C1623	77
A3A8A1A1C1624	77
A3A8A1A1C1625	77
A3A8A1A1C1626	77
A3A8A1A1E1	76
A3A8A1A1H4	76
A3A8A1A1H4	76
A3A8A1A1L1609	77
A3A8A1A1R1603	77
A3A8A1A1R1604	77
A3A8A1A1R1605	77
A3A8A1A1R1606	77
A3A8A1A1R1607	77
A3A8A1A2	77
A3A8A1A2C1601	77
A3A8A1A2C1609	77
A3A8A1A2C1610	77
A3A8A1A2C1611	77
A3A8A1A2C1619	77
A3A8A1A2E1	77
A3A8A1A2E2	78
A3A8A1A2E2H4	78
A3A8A1A2E2H4	78
A3A8A1A2H13	77
A3A8A1A2K1601	78
A3A8A1A2K1602	78
A3A8A1A2R1601	78
A3A8A1A2R1602	78
A3A8A1C1602	75
A3A8A1C1603	75
A3A8A1C1604	75
A3A8A1C1605	75
A3A8A1C1606	75
A3A8A1C1607	75
A3A8A1C1608	75
A3A8A1C1612	75
A3A8A1C1613	76
A3A8A1C1614	75
A3A8A1C1615	76
A3A8A1C1616	75

REFERENCE DESIGNATION	PAGE NUMBER
A3A8A1C1617	76
A3A8A1C1618	75
A3A8A1C1627	75
A3A8A1C1628	75
A3A8A1C1629	75
A3A8A1C1630	75
A3A8A1C1631	75
A3A8A1H1	76
A3A8A1H2	76
A3A8A1H4	75
A3A8A1J1601	76
A3A8A1J1601H2	76
A3A8A1J1601H2	76
A3A8A1J1601H4	76
A3A8A1L1601	76
A3A8A1L1602	76
A3A8A1L1603	76
A3A8A1L1604	76
A3A8A1L1605	76
A3A8A1L1606	76
A3A8A1L1607	76
A3A8A1L1608	76
A3A8A1L1610	76
A3A8A1MP1	76
A3A8A1MP2	76
A3A8A1MP2H2	76
A3A8A1MP3	78
A3A8A1MP3H12	78
A3A8A1MP3H12	78
A3A8A1MP4	78
A3A8A1W1	75
A3A8A1W1P1601	75
A3A8A1W2	75
A3A8A1W2P1602	75
A3A8A2	78
A3A8A2A1	78
A3A8A2A1H1	78
A3A8A2A1H2	78

REFERENCE DESIGNATION	PAGE NUMBER
A3A8A2A1H3	79
A3A8A2A1MP1	78
A3A8A2A1MP2	78
A3A8A2A1MP3	78
A3A8A2A1MP3H1	78
A3A8A2A1MP4	78
A3A8A2A1MP4H4	78
A3A8A2A1MP5	79
A3A8A2A2	79
A3A8A2A2E1	79
A3A8A2A2H2	79
A3A8A2A2H2	79
A3A8A2A2MP1	79
A3A8A2A2MP1H6	79
A3A8A2A3	79
A3A8A2A3H2	79
A3A8A2A3MP1	79
A3A8A2A3MP2	79
A3A8A2A3MP3	79
A3A8A2B1001	79
A3A8A2CP1002	78
A3A8A2CP1003	78
A3A8A2CR1002	80
A3A8A2CR1002H1	80
A3A8A2CR1002H1	80
A3A8A2E1	80
A3A8A2E2	80
A3A8A2E3	80
A3A8A2E4	80
A3A8A2E4H11	80
A3A8A2E5	80
A3A8A2E5H1	81
A3A8A2FL1001	79
A3A8A2FL1001H2	79
A3A8A2FL1002	79
A3A8A2FL1002H2	79
A3A8A2H1	79
A3A8A2H2	81

REFERENCE DESIGNATION	PAGE NUMBER
A3A8A2K1001	80
A3A8A2K1001H2	80
A3A8A2K1002	80
A3A8A2K1002H2	80
A3A8A2K1002H2	80
A3A8A2MP1	78
A3A8A2MP2	79
A3A8A2MP3	79
A3A8A2MP3H4	79
A3A8A2MP4	79
A3A8A2MP5	79
A3A8A2MP6	79
A3A8A2MP6H4	80
A3A8A2MP6H4	80
A3A8A2MP7	80
A3A8A2M1001	78
A3A8A2R1001	80
A3A8A2R1001H1	80
A3A8A2R1001H1	80
A3A8A2R1007	80
A3A8A2R1007H2	80
A3A8A2R1007H2	80
A3A8A2S1002	80
A3A8A2S1003	80
A3A8A3	81
A3A8A3CR1001	81
A3A8A3C1002	81
A3A8A3C1003	81
A3A8A3C1004	81
A3A8A3C1005	81
A3A8A3R1002	81
A3A8A3R1003	81
A3A8A3R1004	81
A3A8A3R1005	81
A3A8A3R1006	81
A3A8CP1001	81
A3A8C1001	81
A3A8E1	83

REFERENCE DESIGNATION	PAGE NUMBER
A3A8F1001	83
A3A8F1002	83
A3A8F1003	83
A3A8J1001	82
A3A8J1001H2	82
A3A8J1001H2	82
A3A8J1002	83
A3A8J1002H2	83
A3A8J1002H2	83
A3A8J1002H2	83
A3A8J1003	82
A3A8J1003H2	82
A3A8J1003H2	82
A3A8J1003H2	82
A3A8J1004	82
A3A8J1004H2	82
A3A8J1004H2	82
A3A8J1004H2	82
A3A8J1005	82
A3A8J1005H2	82
A3A8J1005H2	82
A3A8J1005H2	82
A3A8J1006	82
A3A8J1006H2	82
A3A8J1006H2	82
A3A8J1007	82
A3A8J1007H2	82
A3A8J1007H2	82
A3A8J1007H2	82
A3A8J1009	83
A3A8J1010	83
A3A8J1011	83
A3A8MP1	81
A3A8MP1H2	81
A3A8MP1H2	81
A3A8MP2	83
A3A8MP2H1	83
A3A8MP2H1	83

REFERENCE DESIGNATION	PAGE NUMBER
A3A8MP3	83
A3A8MP3H1	83
A3A8MP3H11	83
A3A8MP4	83
A3A8MP4H4	83
A3A8P1001	82
A3A8P1002	82
A3A8P1003	82
A3A8P1004	83
A3A8P1008	83
A3A8S1001	83
A3A8W1	81
A3A8W1P1006	81
A3A8W2	81
A3A8W2P1007	81
A3A8W3	81
A3A8W3J1012	81
A3A8W3J1015	81
A3A9	83
A3A9H1	84
A3A9MP1	83
A3A9MP2	83
A3A9MP3	84
A3MP1	84
A3MP1H2	84
A3MP2	84
A4	84
A4J1008	84
A4J1008H2	84
A4J1008H2	84
A4MP1	84
A4MP2	84
A4MP2H4	84
A4MP2H4	84
A4P1009	84
A4P1010	84
A4P1011	84
A5	85

REFERENCE DESIGNATION	PAGE NUMBER
A5A1H2	86
A5A1H9	86
A5A1H35	86
A5A1MP1	85
A5A1MP2	85
A5A2J103	92
A5A2J103	92
A5A2P1	92
A5A3MP3	96
A5B101	86
A5CR101	86
A5C144	85
A5C145	85
A5C154	85
A5E1	85
A5E103	95
A5E104	95
A5E2	97
A5H1	96
A5H11	96
A5H12	86
A5H13	86
A5H14	86
A5H15	95
A5H2	96
A5H20	95
A5H21	95
A5H22	86
A5H25	95
A5H27	95
A5H28	86
A5H3	86
A5H30	96
A5H31	96
A5H33	96
A5H34	86
A5H5	95
A5H7	86
A5H8	86

REFERENCE DESIGNATION	PAGE NUMBER
A5J101	86
A5J102	86
A5K101	86
A5MP1	96
A5MP10	87
A5MP11	87
A5MP12	87
A5MP17	87
A5MP18	87
A5MP2	85
A5MP25	95
A5MP30	96
A5MP31	96
A5MP32	97
A5MP33	96
A5MP34	96
A5MP38	97
A5MP9	95
A5S101	88
A5S102A	88
A5S102B	87
A5S103	91
A5S103A	87

REFERENCE DESIGNATION	PAGE NUMBER

REFERENCE DESIGNATION	PAGE NUMBER

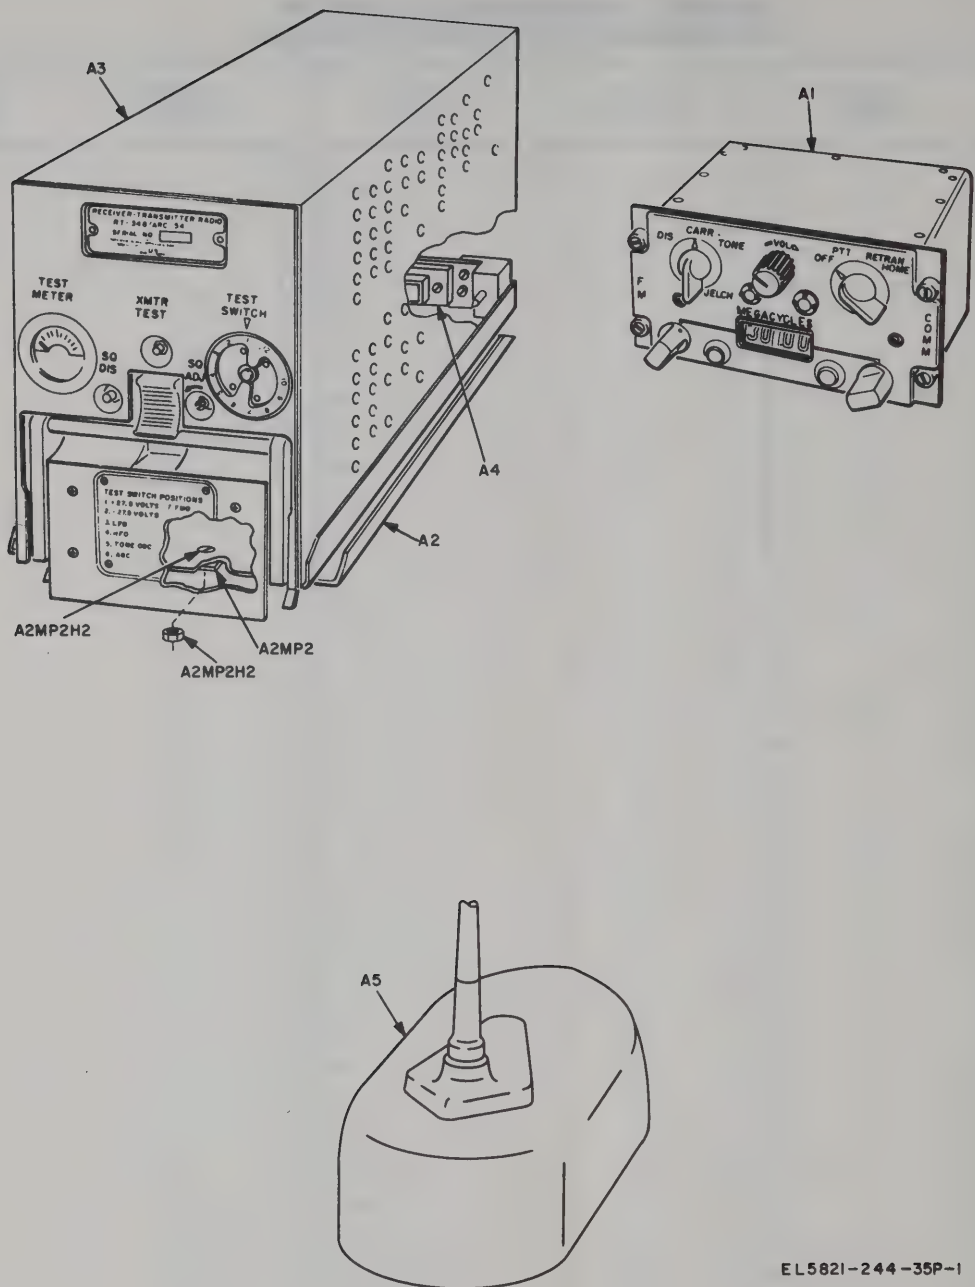

Figure 1. Radio set AN/ARC–54.

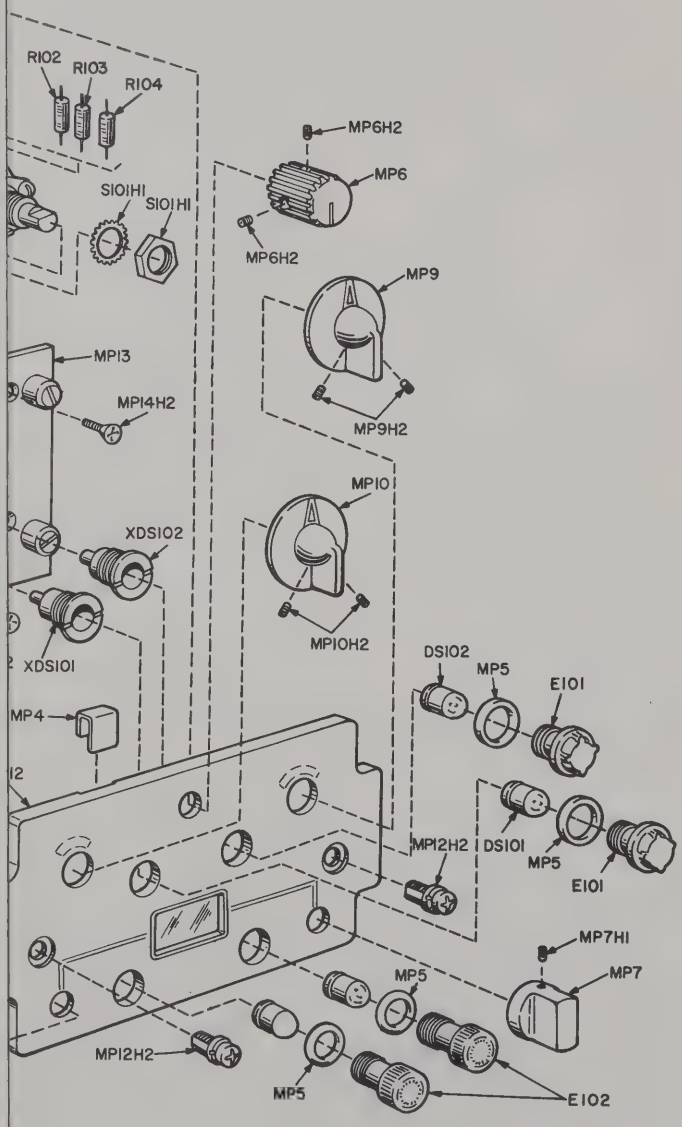

EL5821-244-35P-2

o set control.

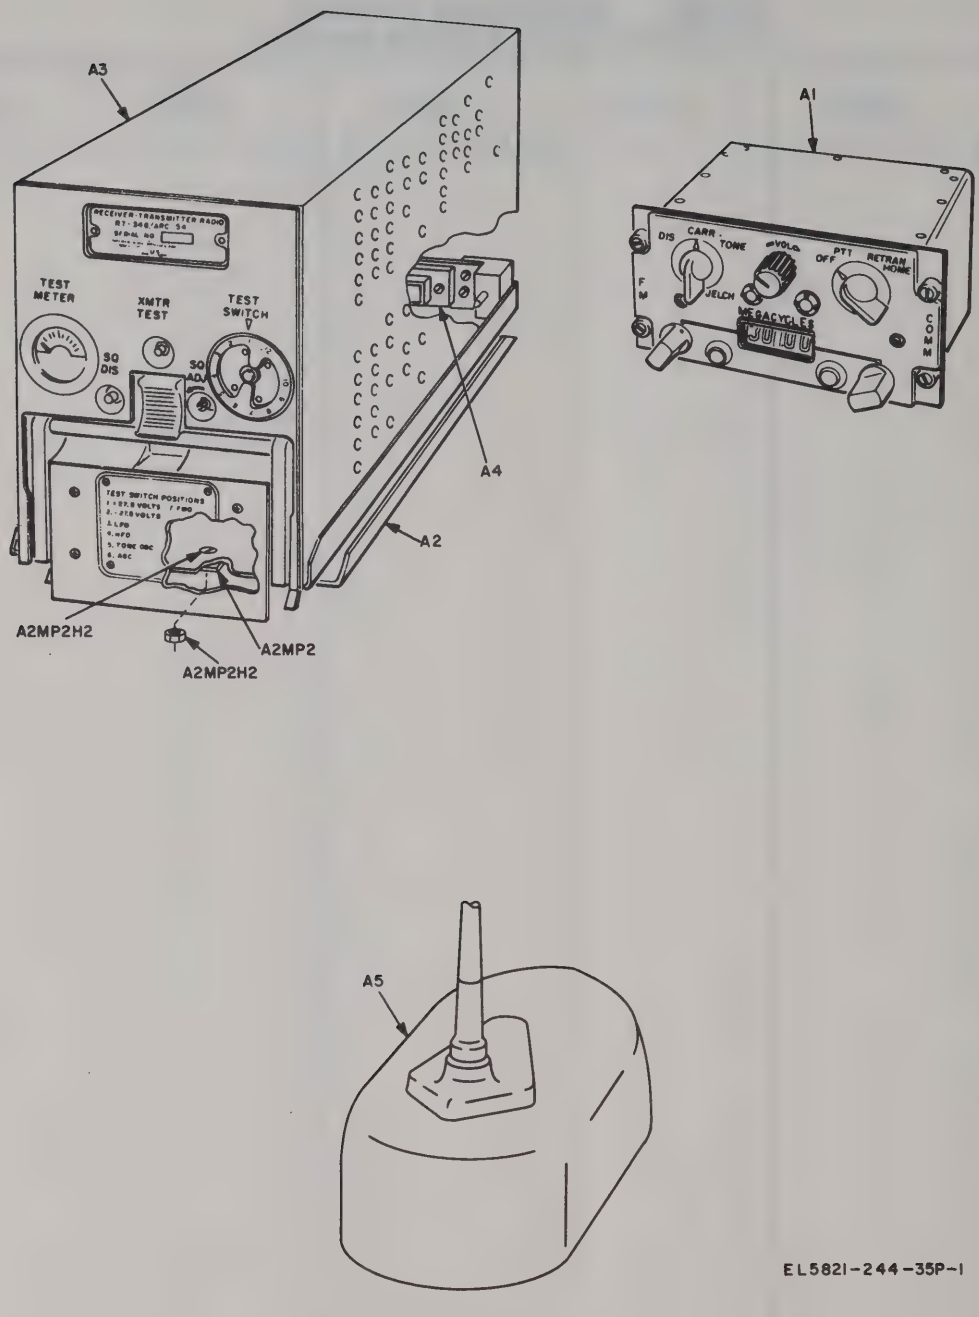

Figure 1. Radio set AN/ARC–54.

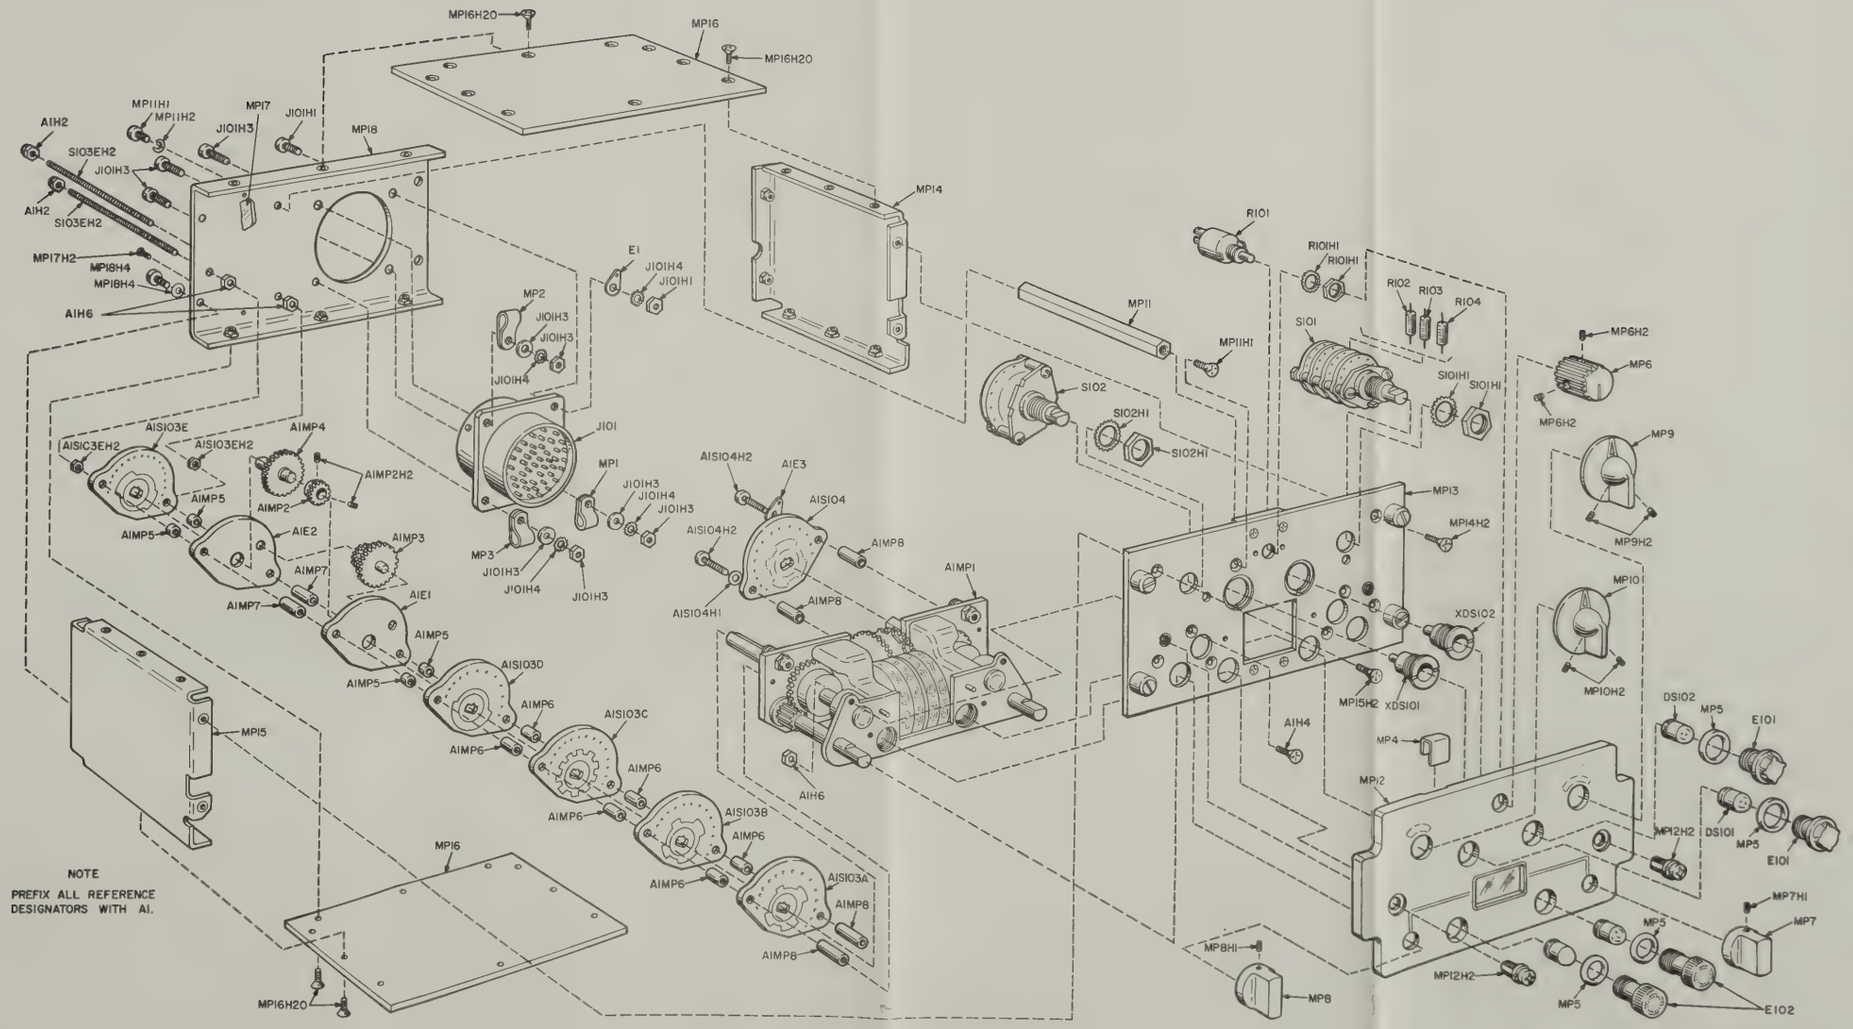

Figure 2. Radio set control.

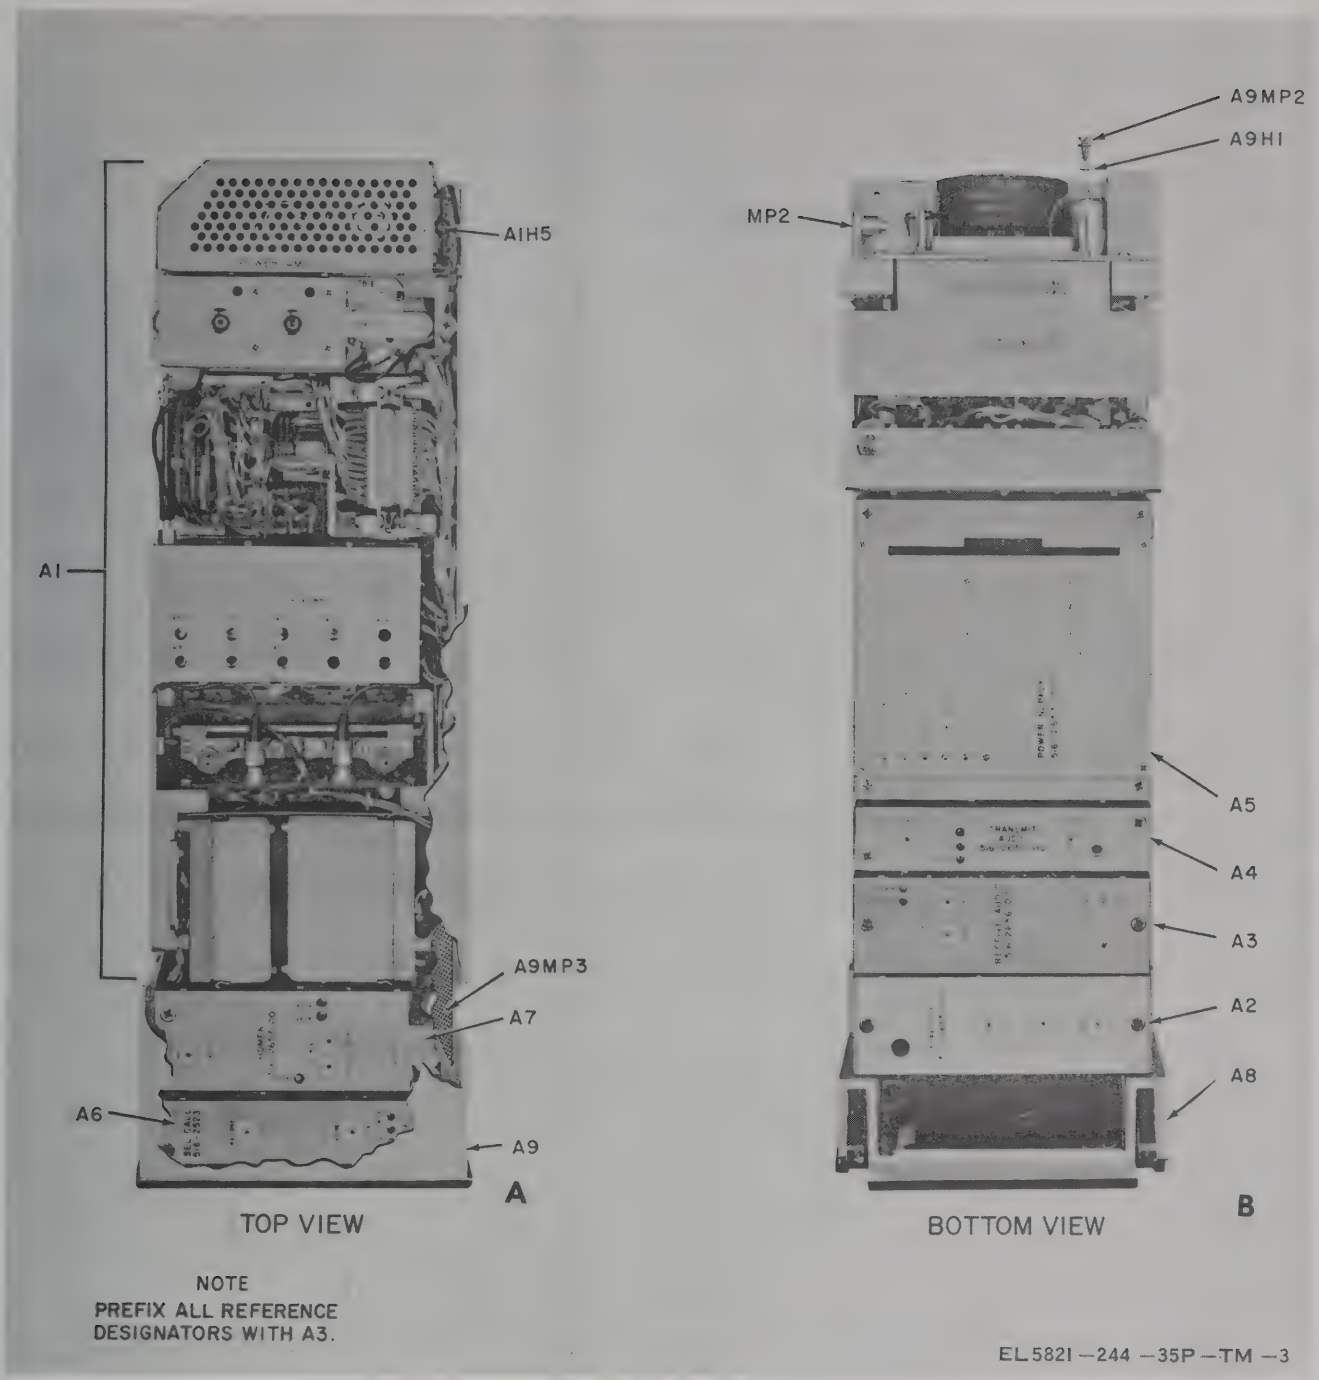

Figure 3. Radio receiver-transmitter.

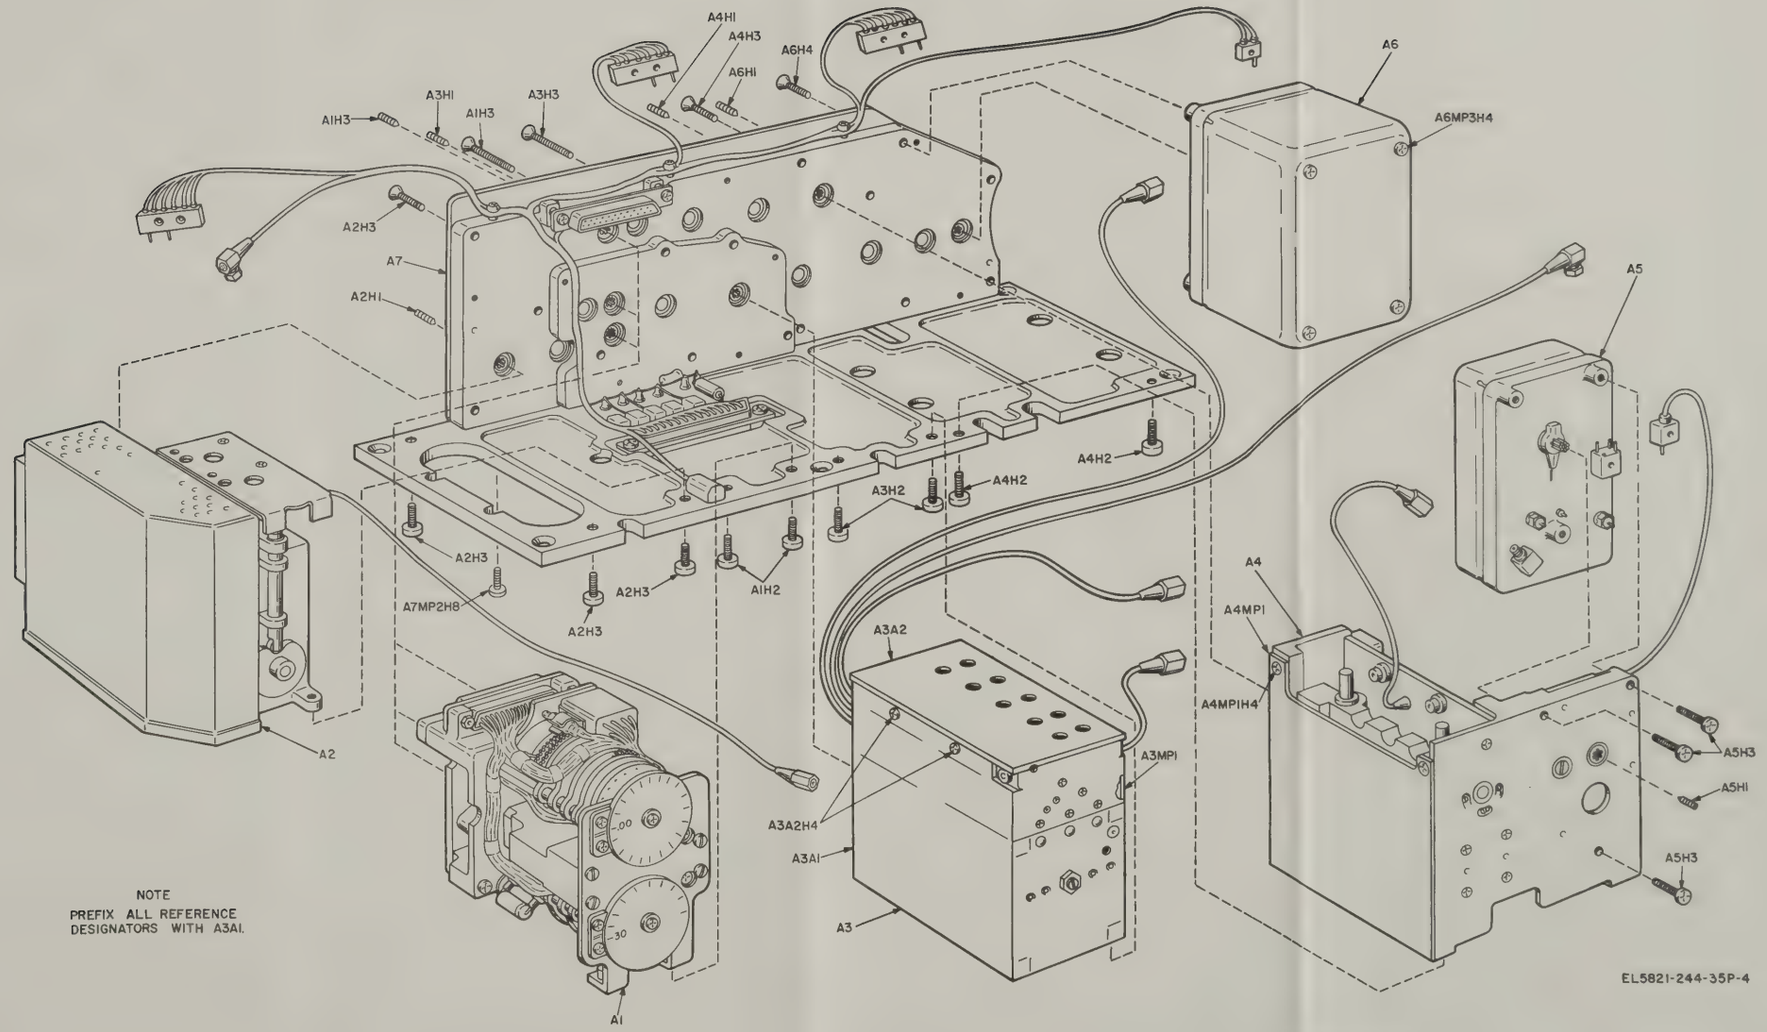

Figure 4. RF amplifier assembly.

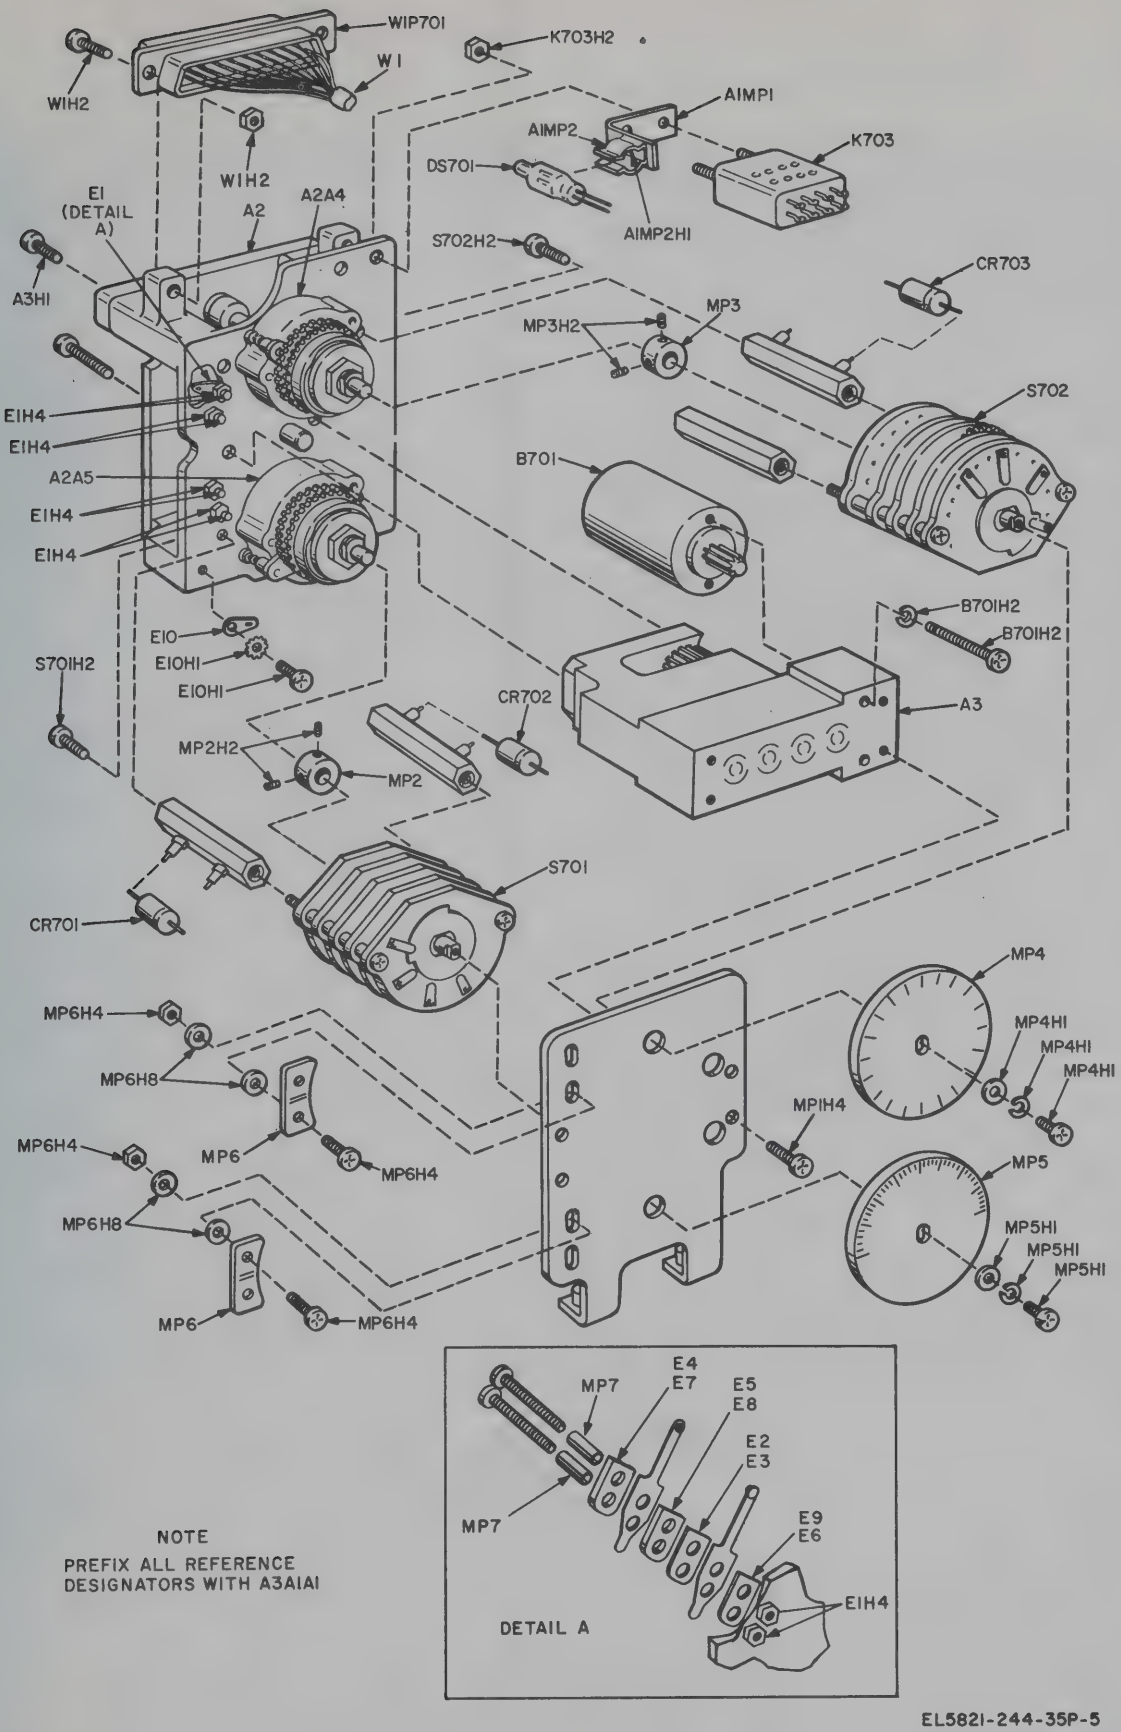

Figure 5. Mechanical drive assembly.

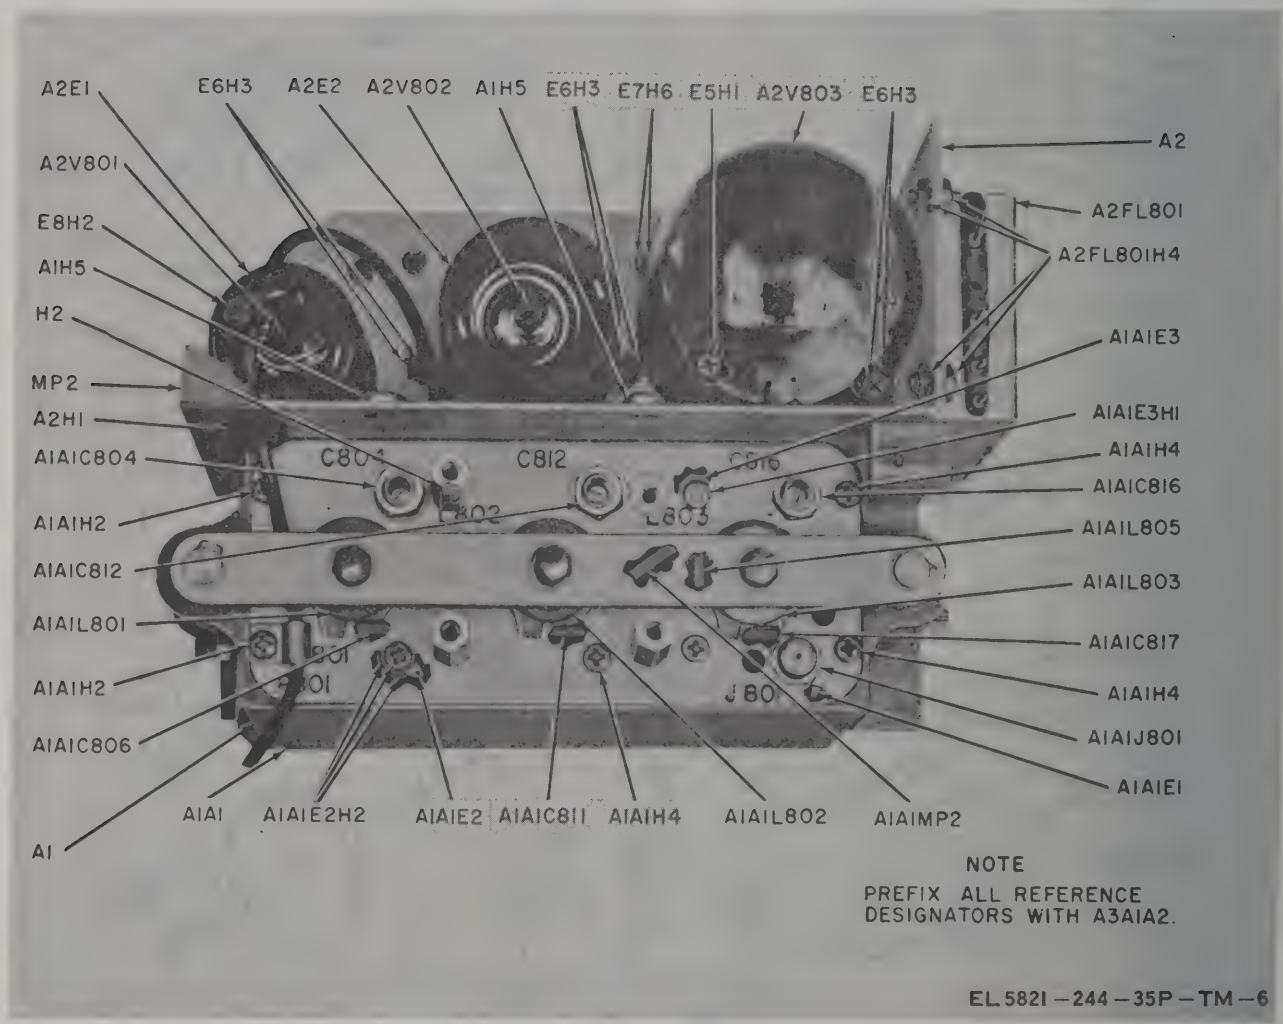

Figure 6. Power amplifier top view.

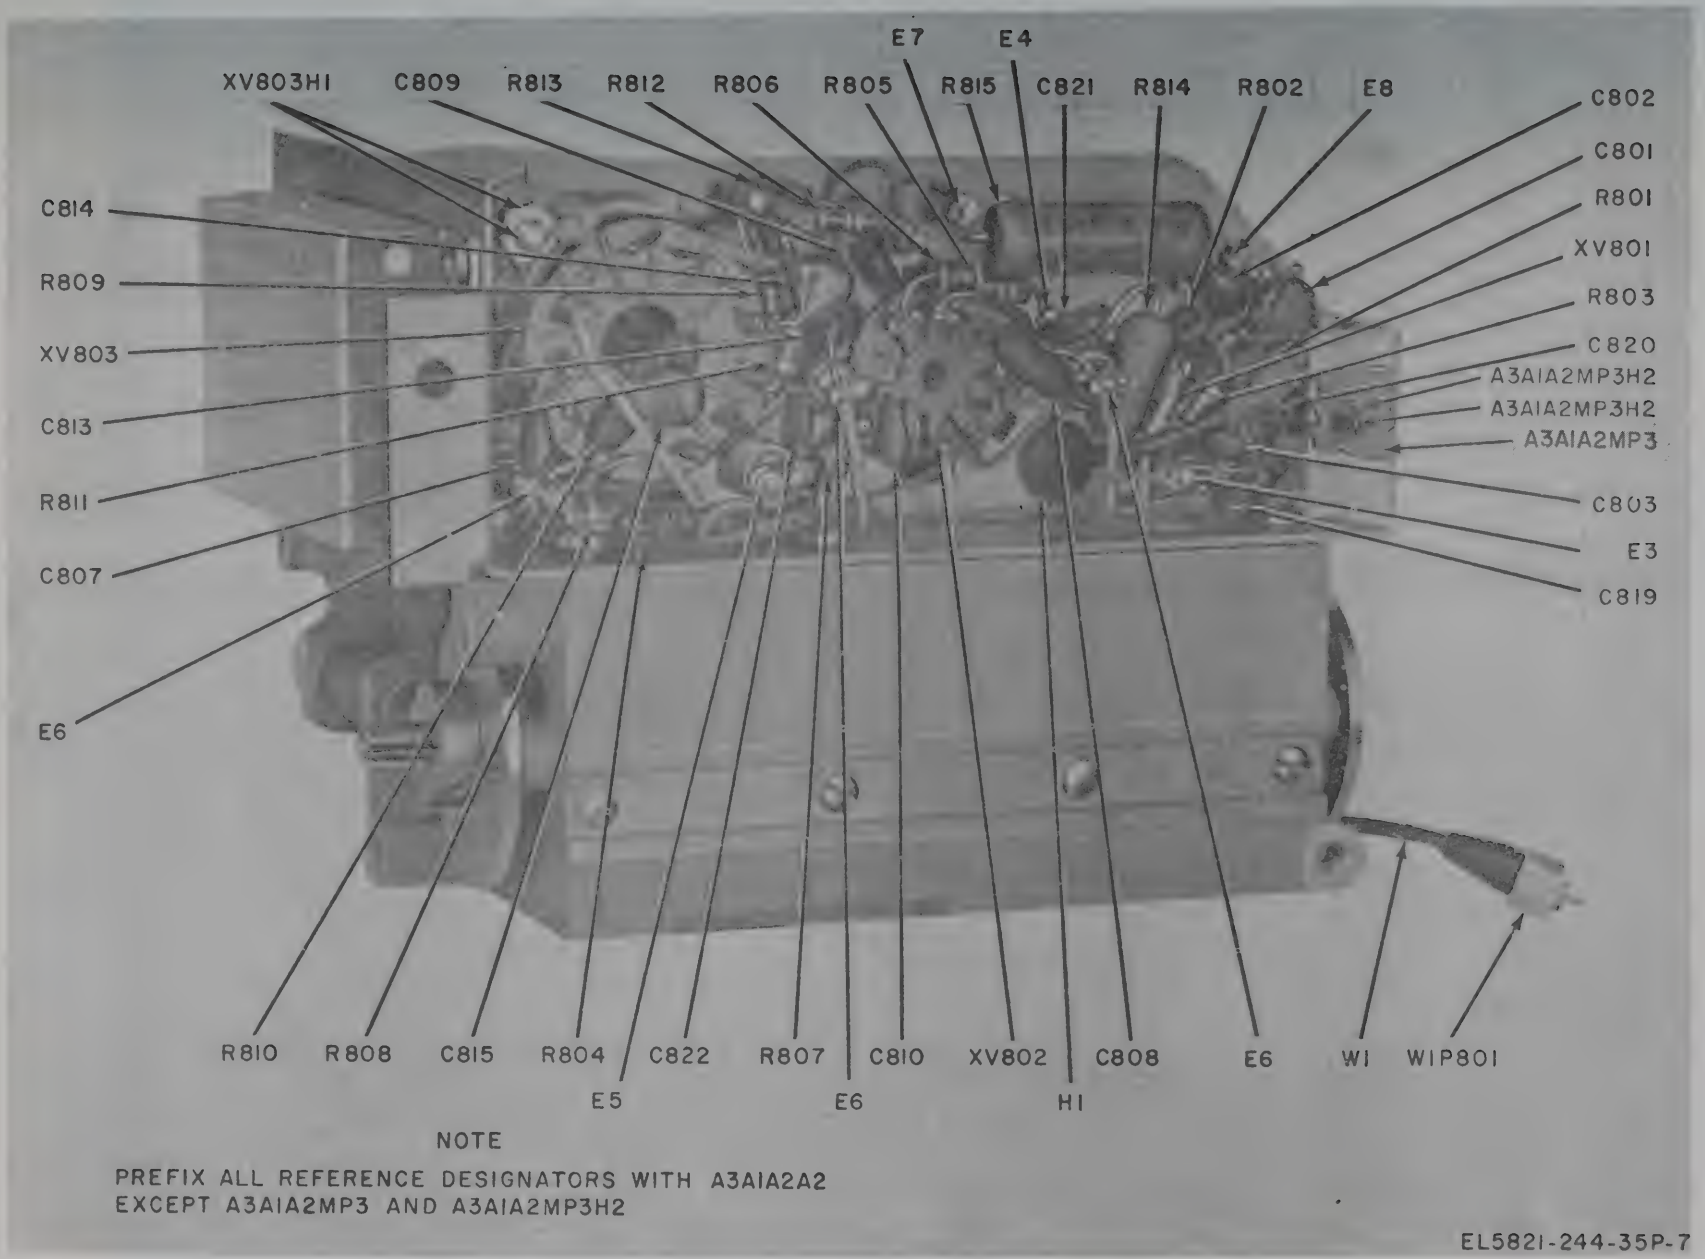

Figure 7. Power amplifier subassembly bottom view.

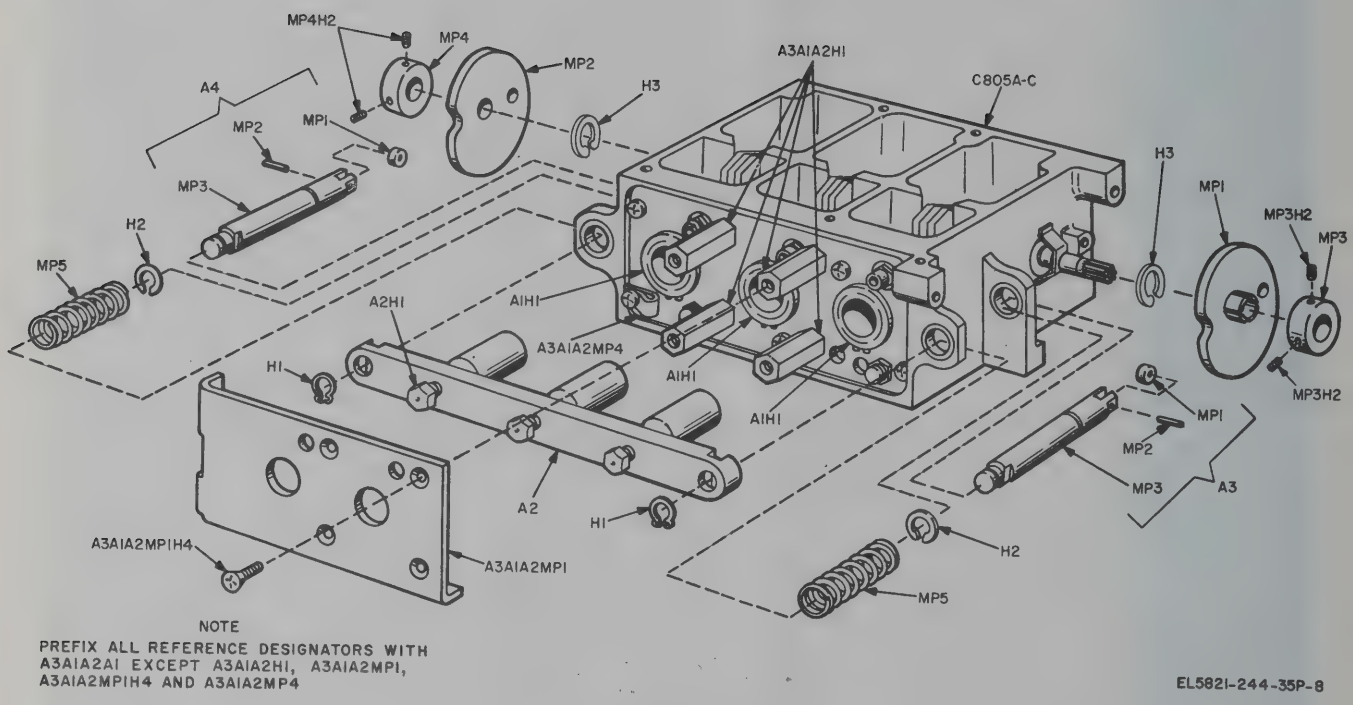

Figure 8. Power amplifier capacitor assembly.

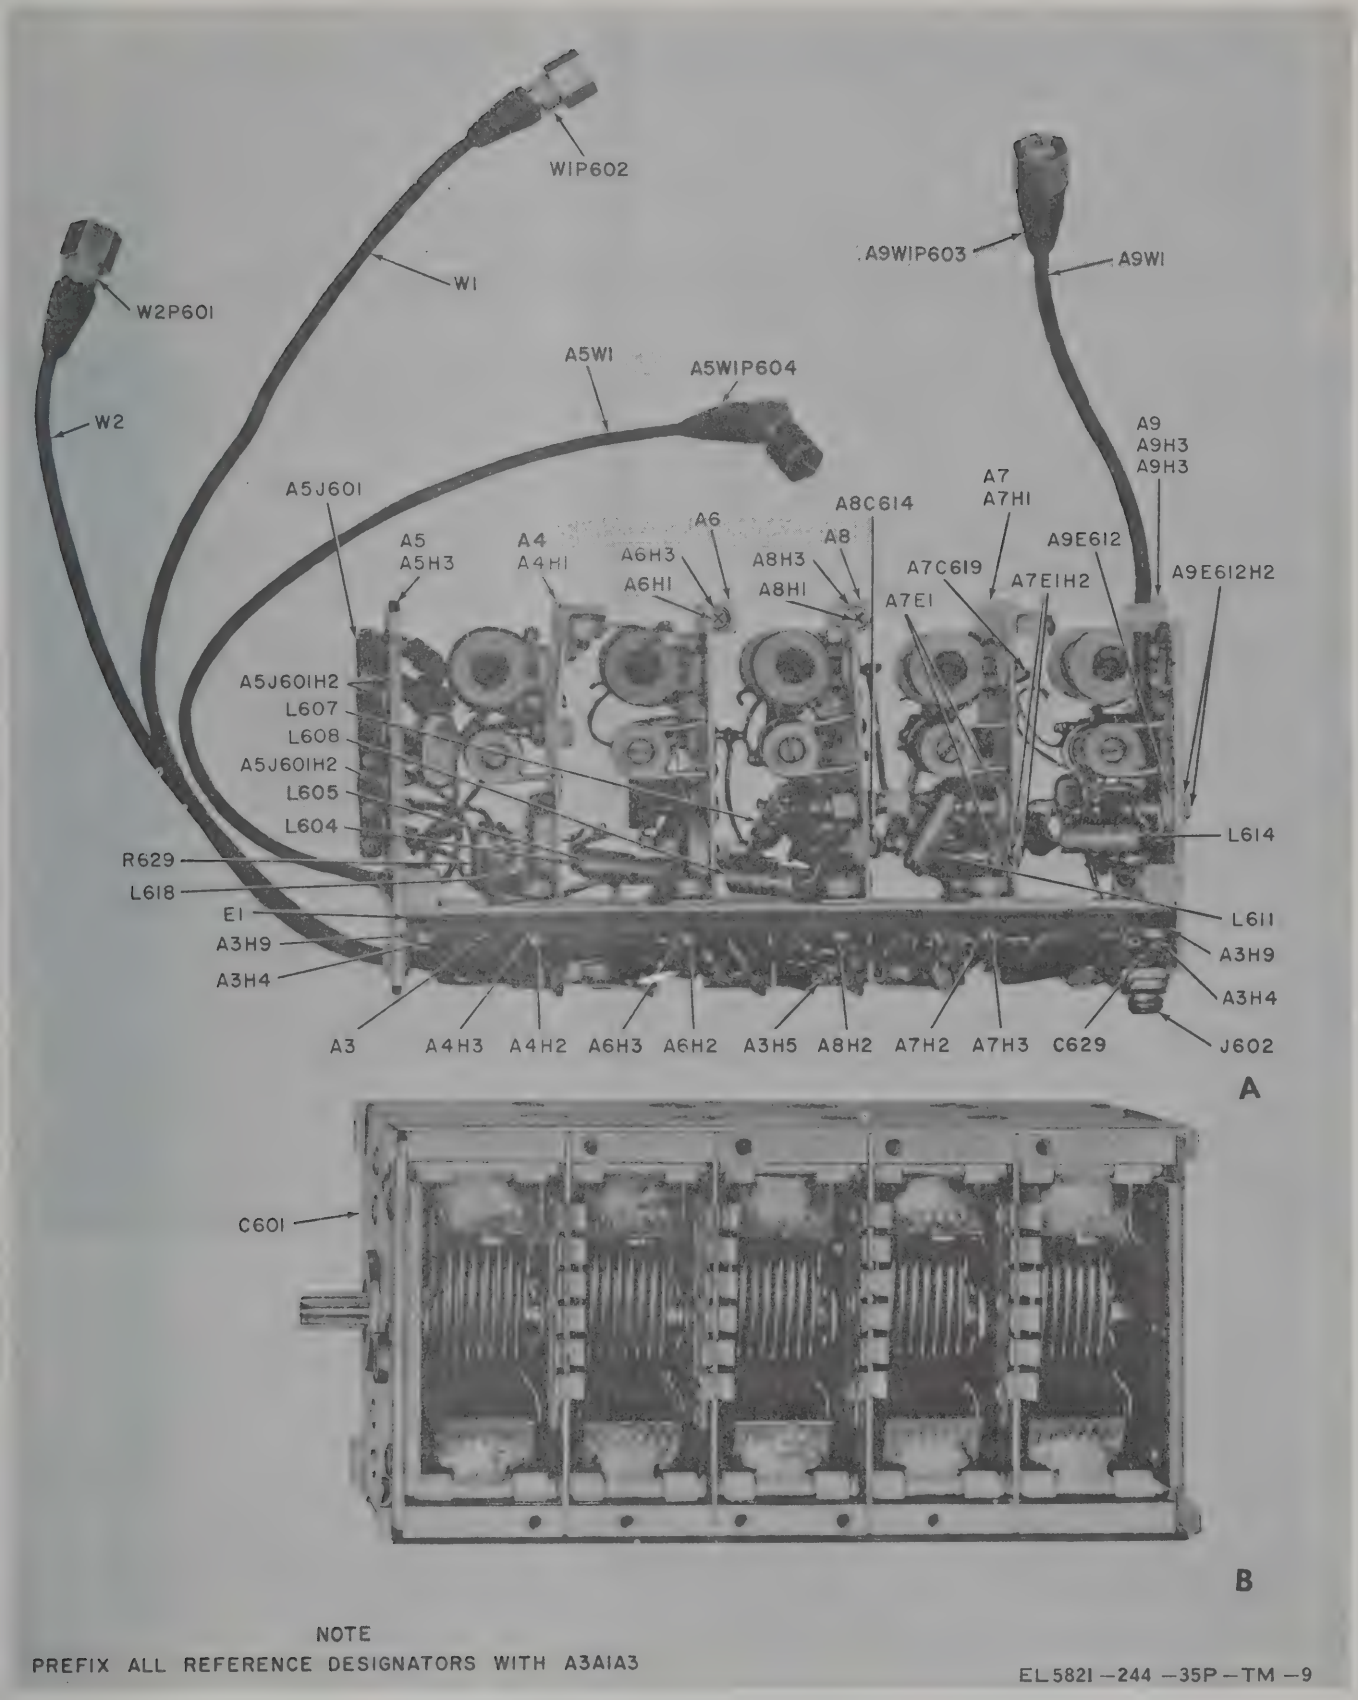

Figure 9. RF amplifier.

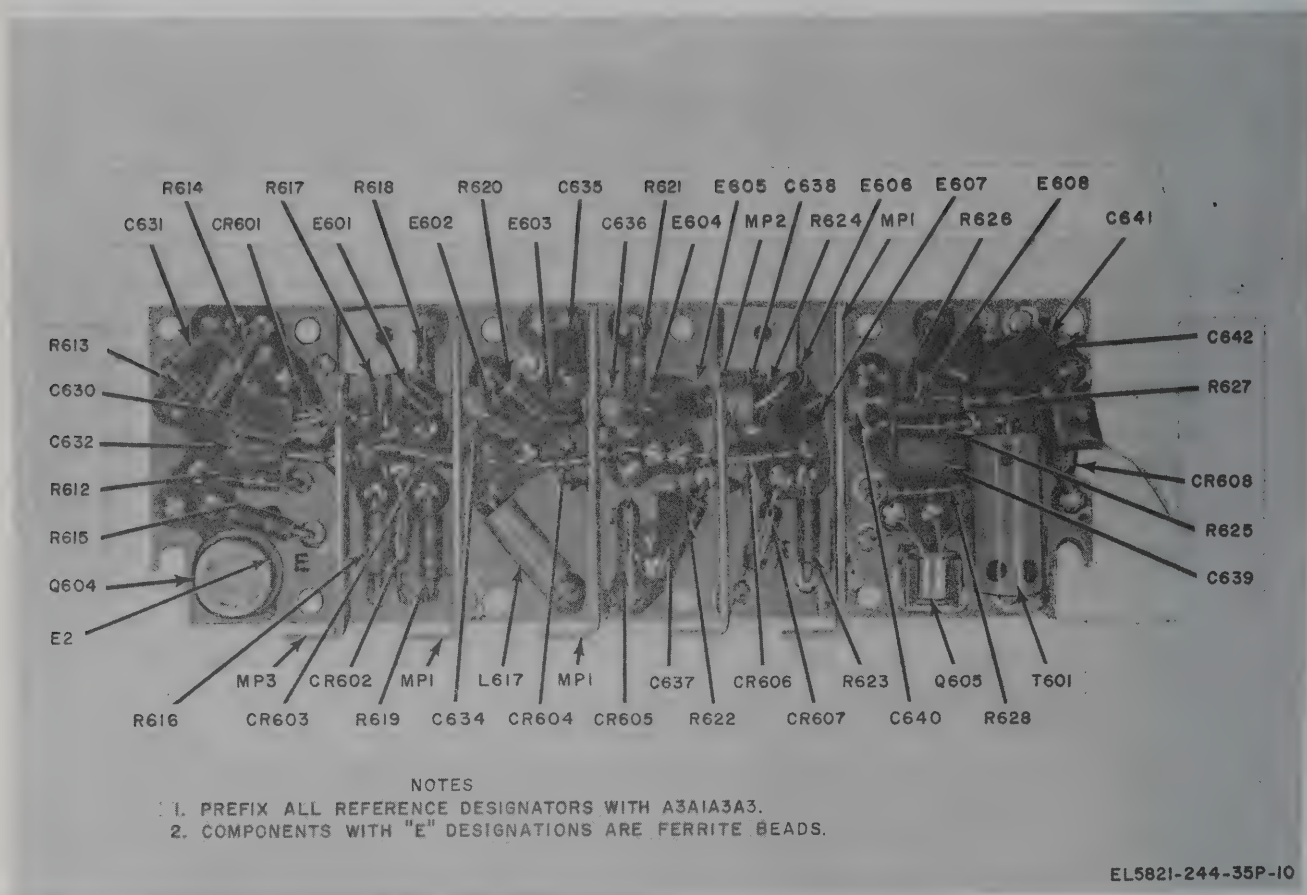

Figure 10. RF amplifier subassembly.

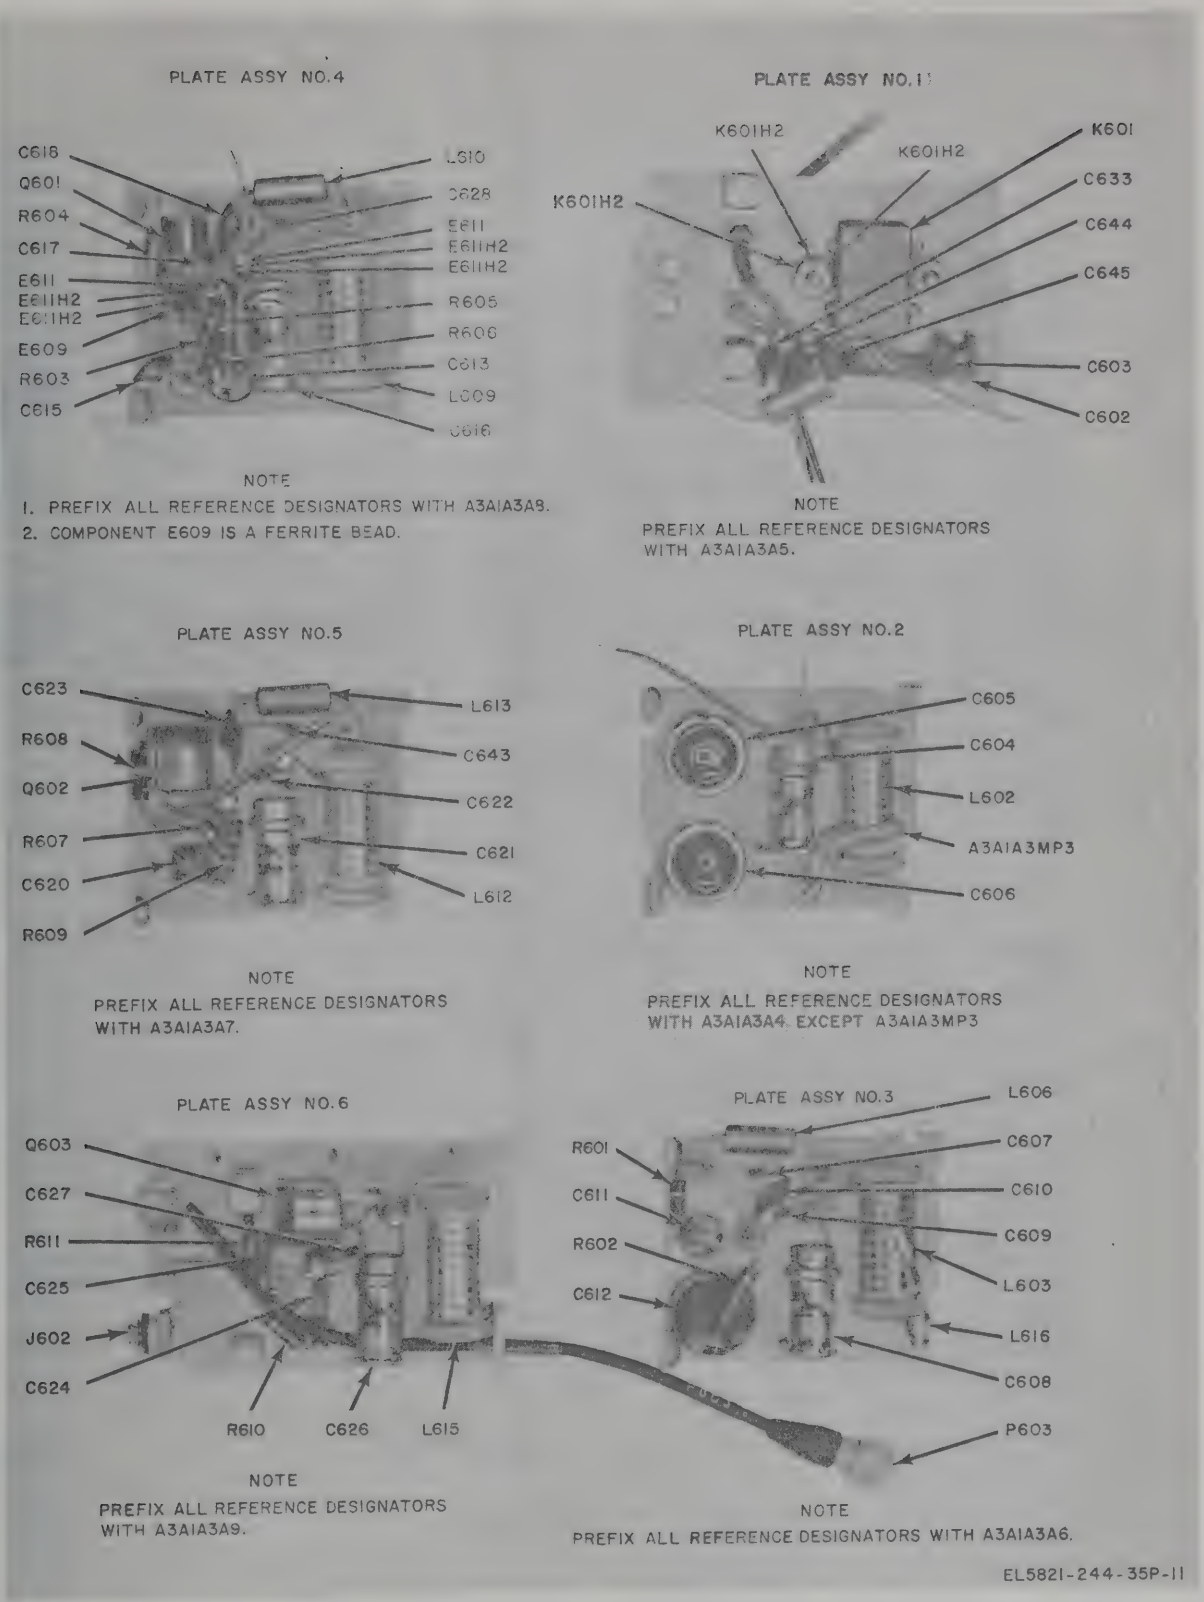

Figure 11. RF amplifier subassembly.

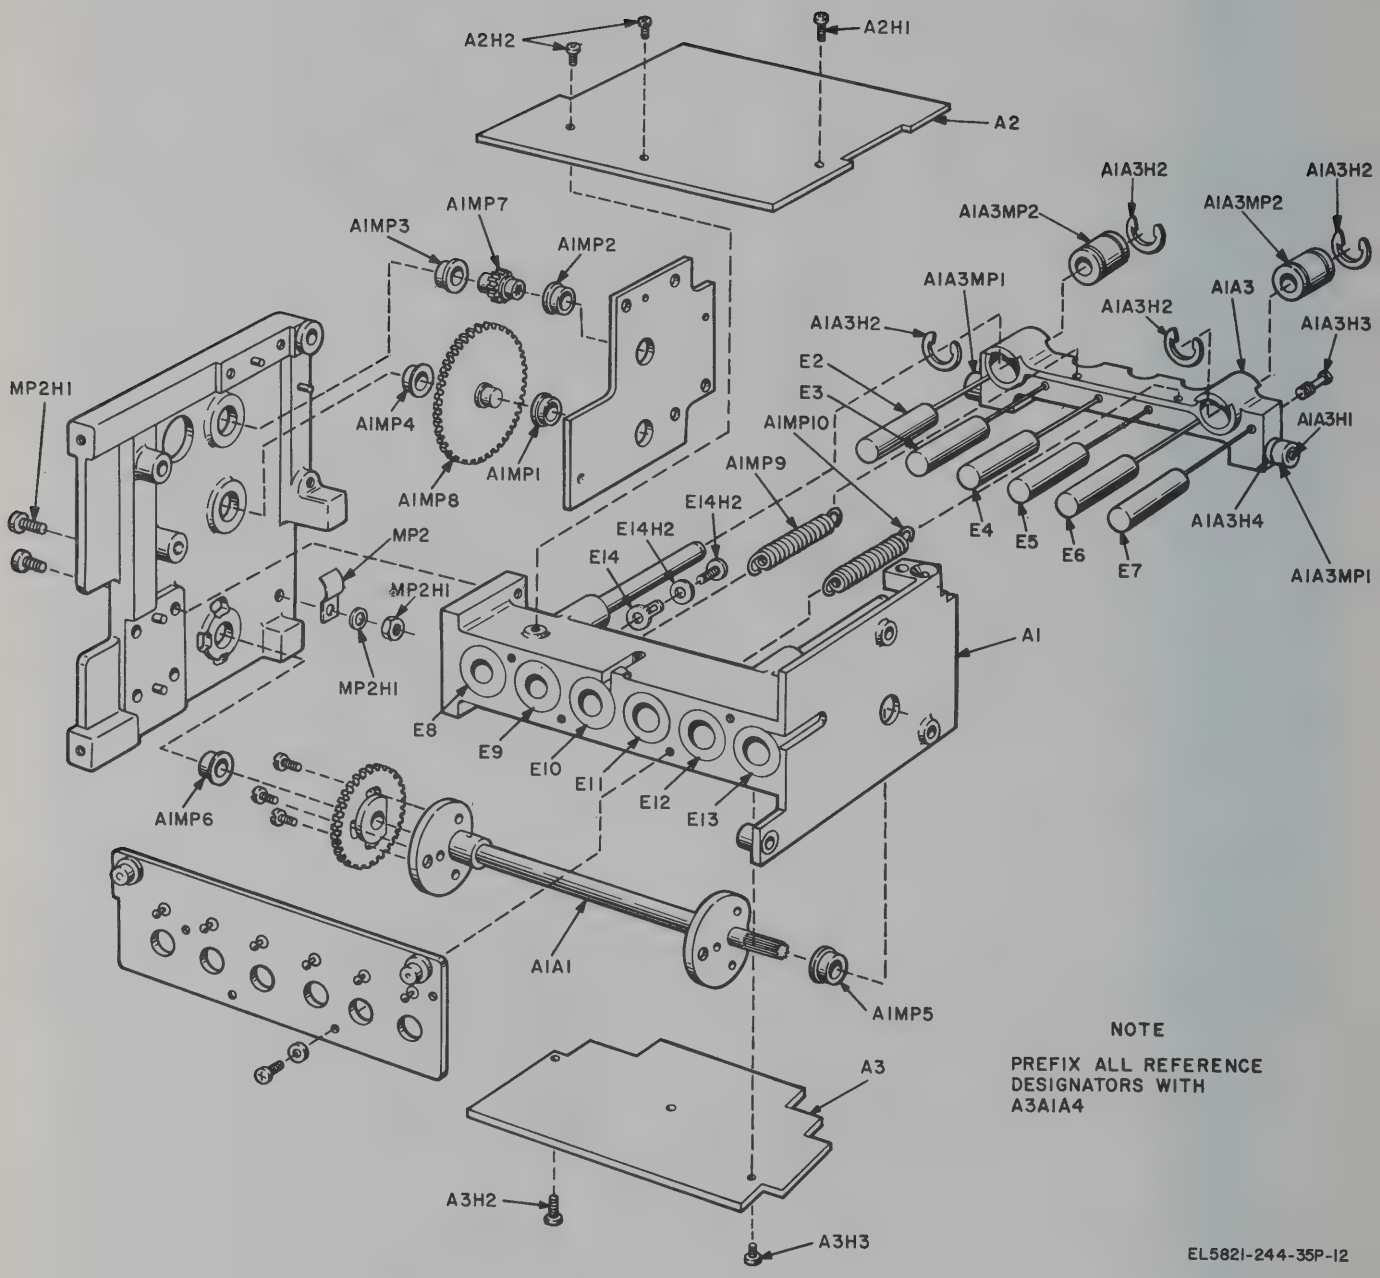

Figure 12. Variable IF amplifier.

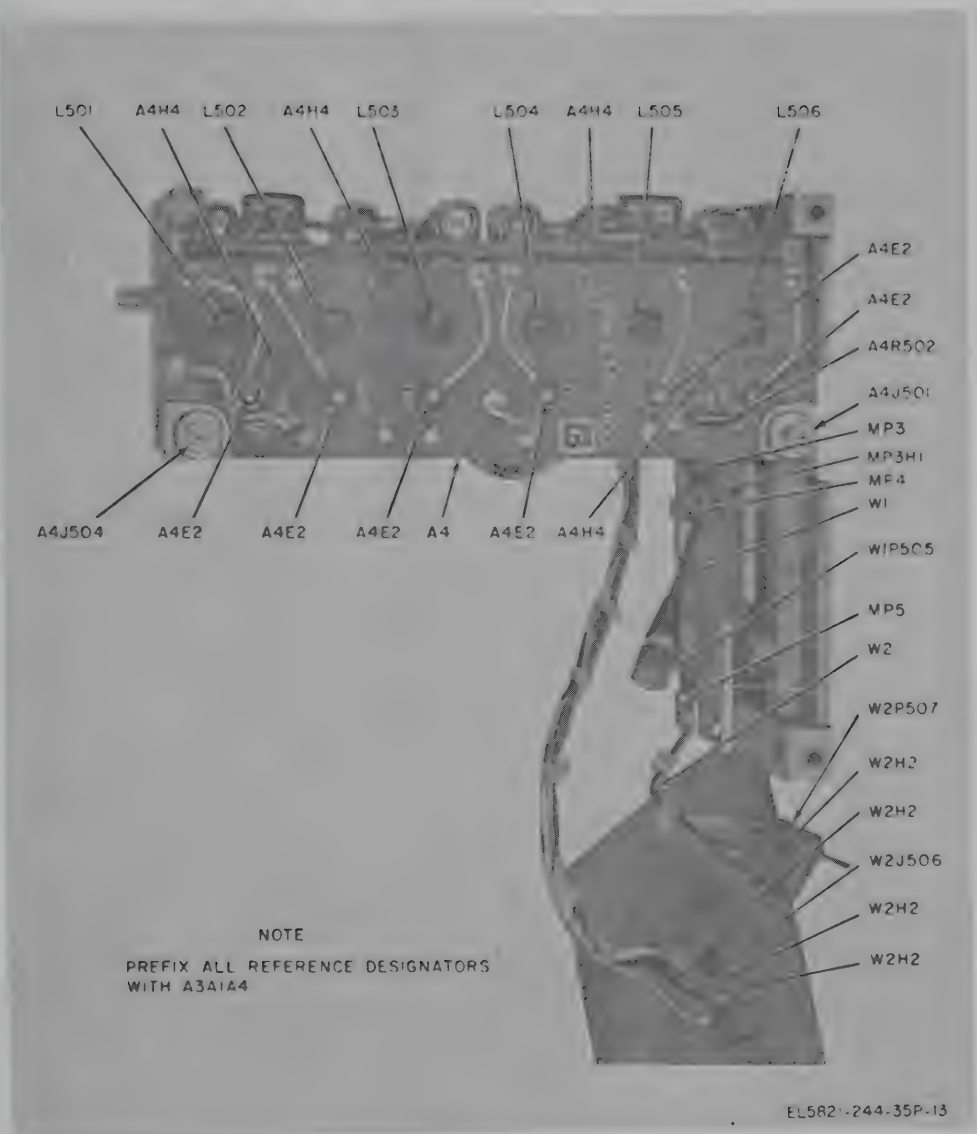

Figure 13. Variable IF amplifier bottom view.

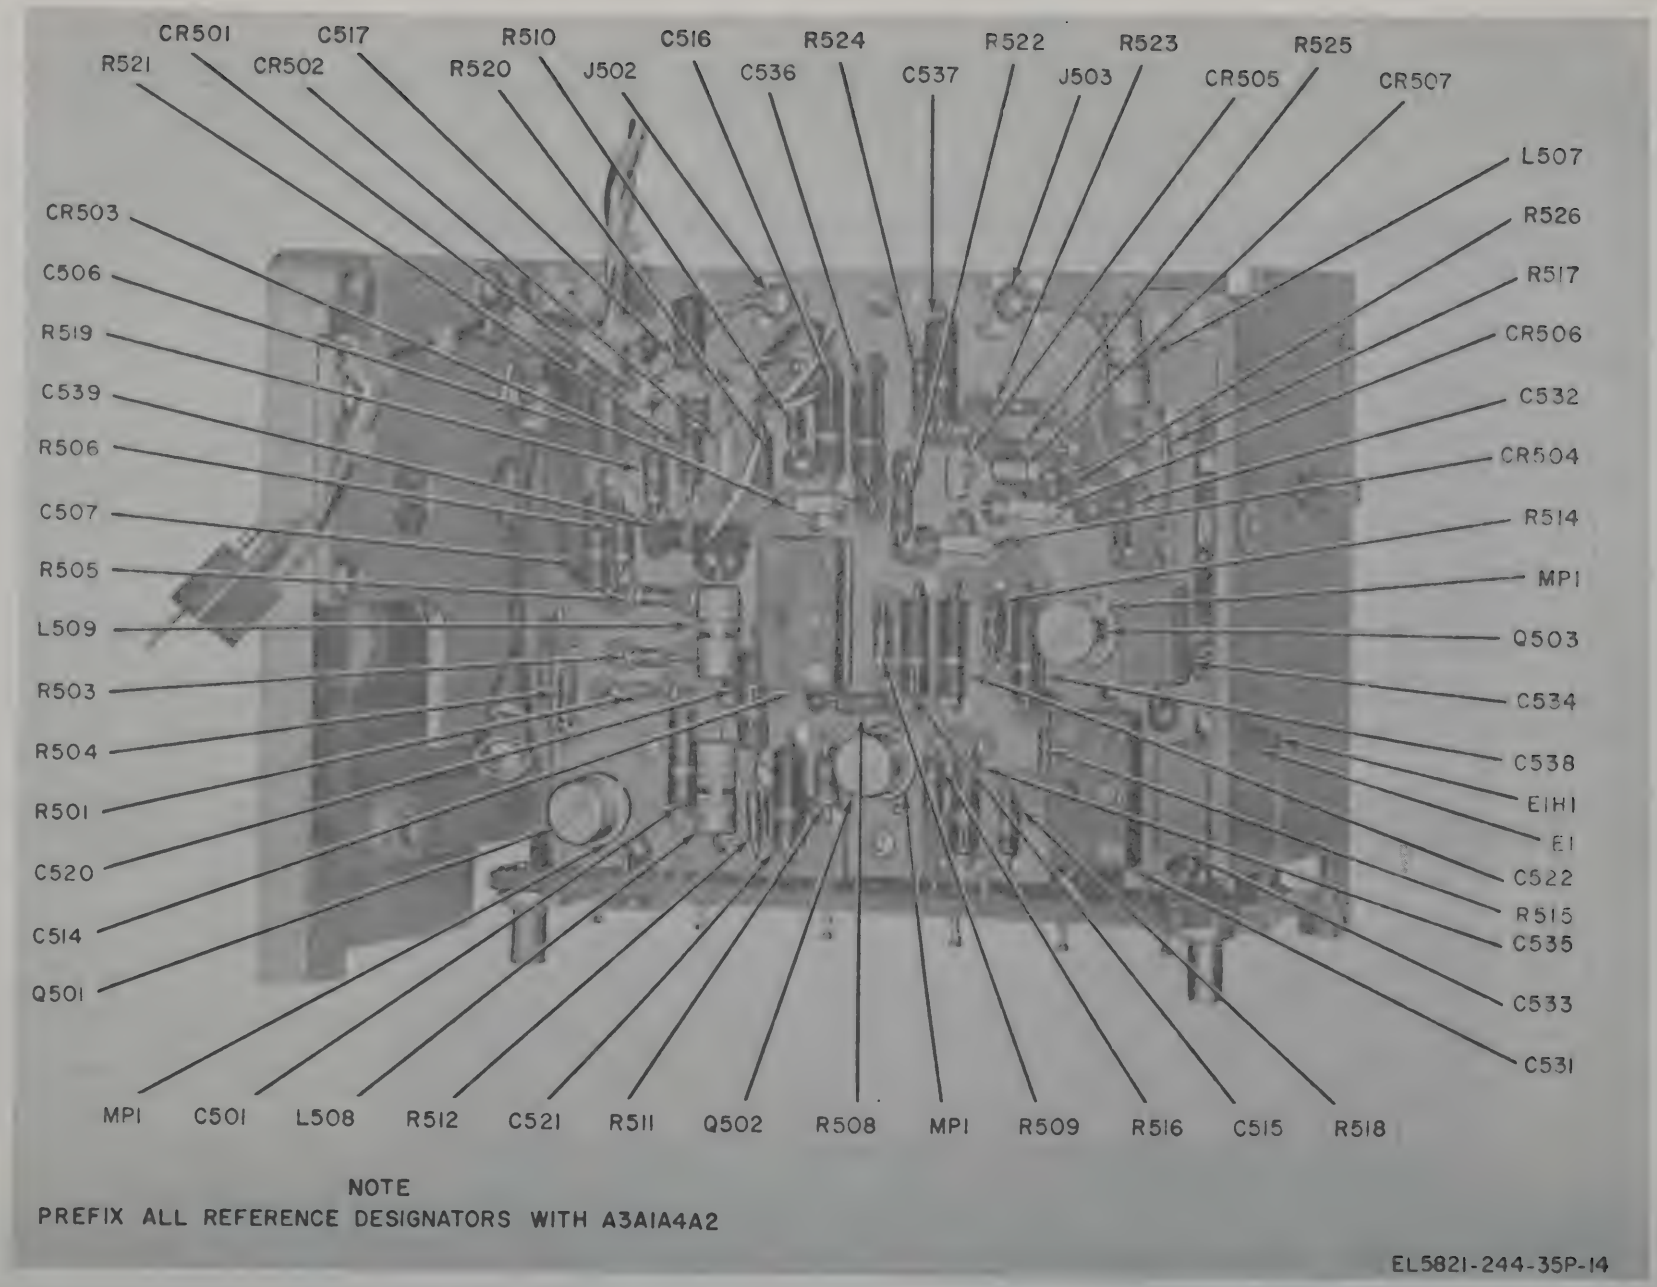

Figure 14. Variable IF amplifier subassembly

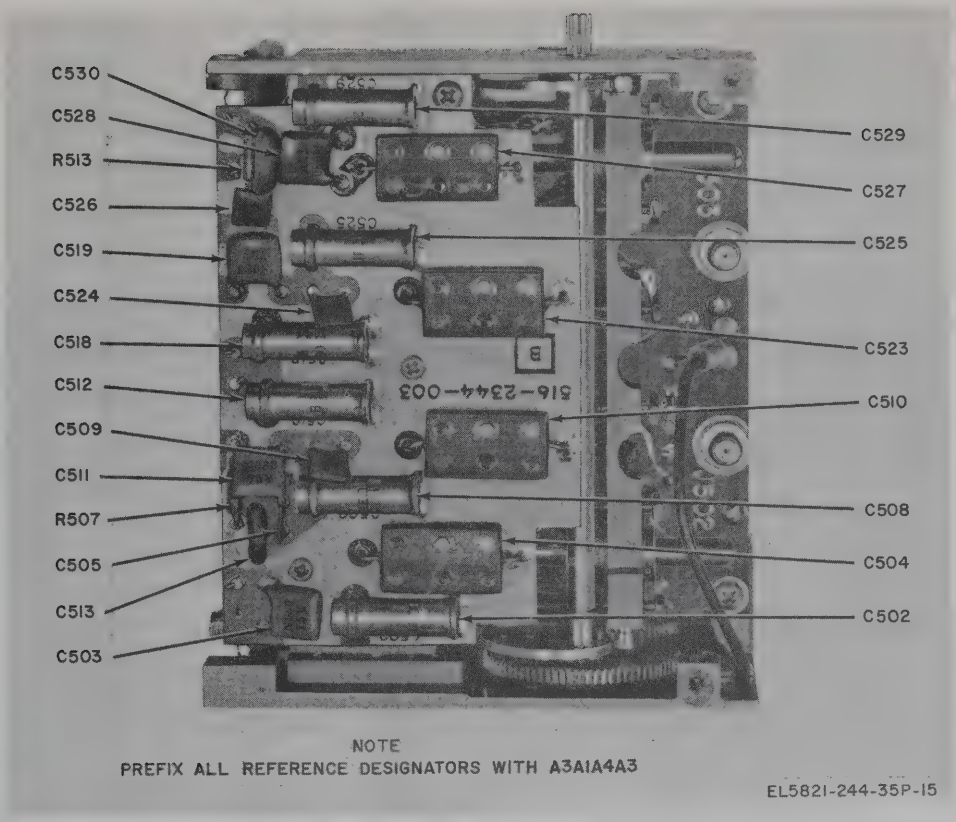

Figure 15. Variable IF amplifier subassembly.

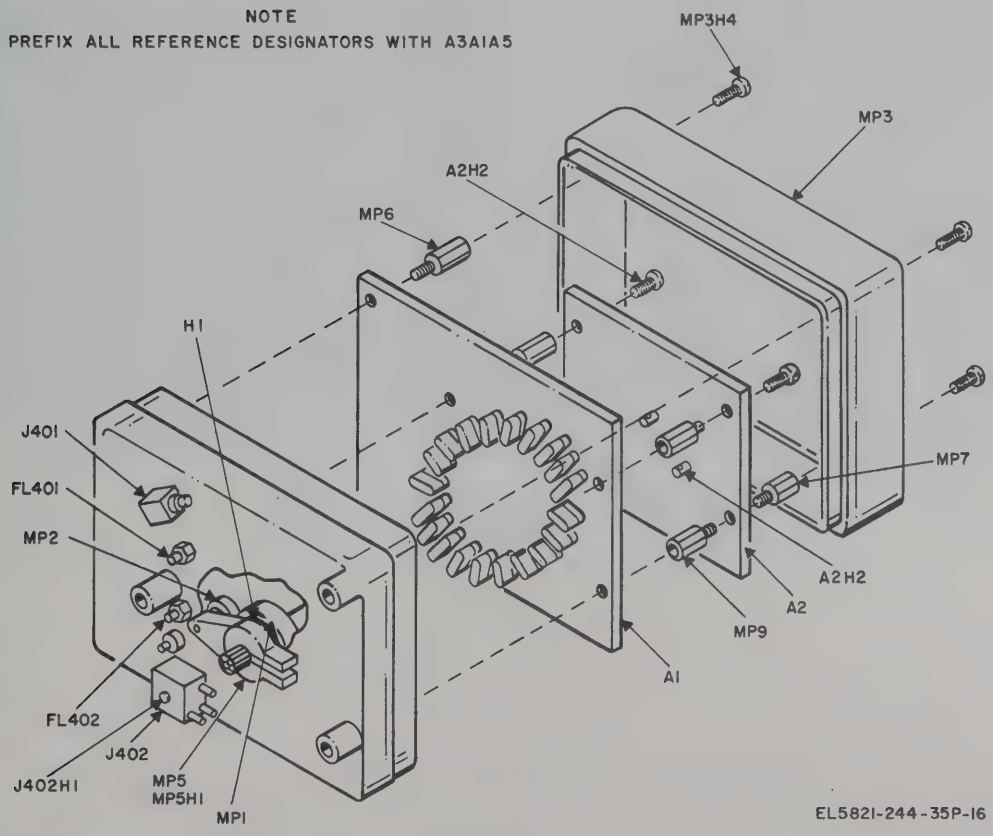

Figure 16. Low frequency oscillator.

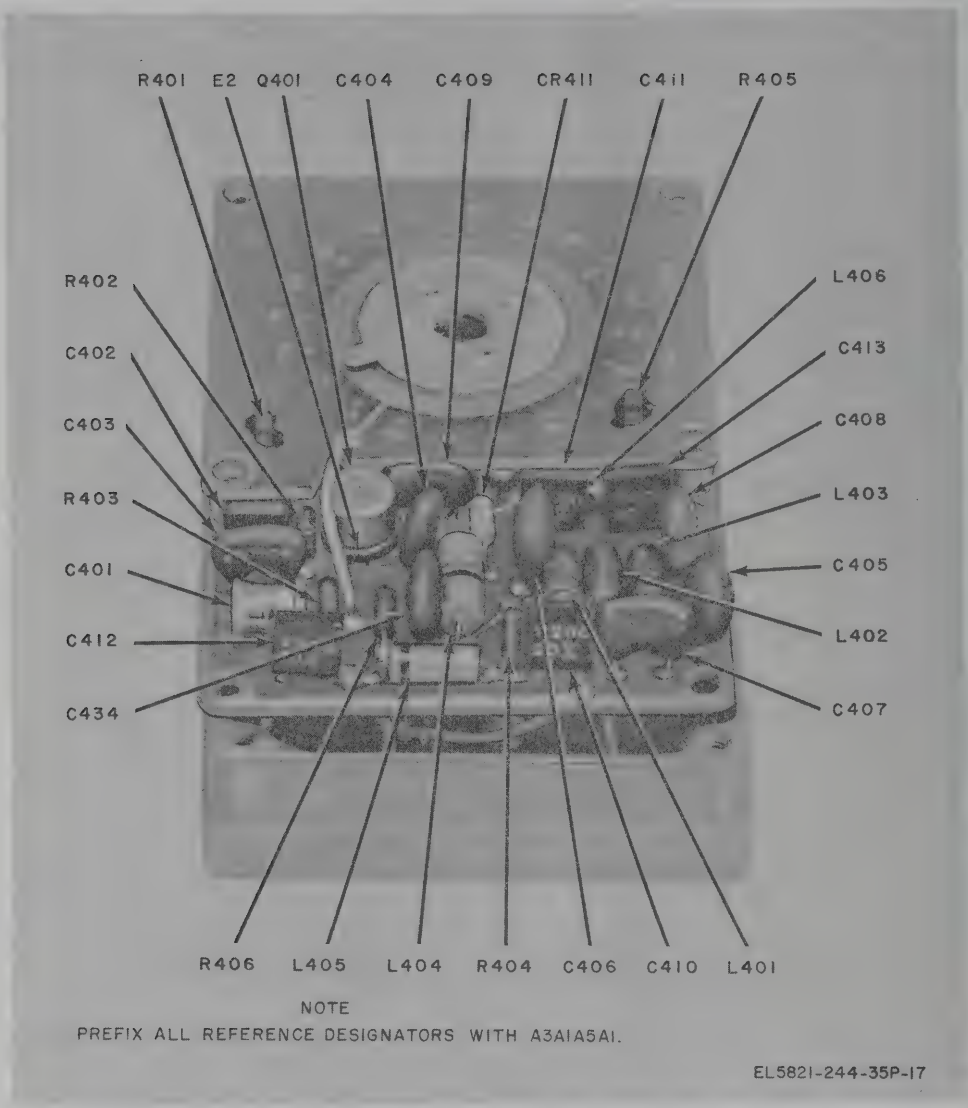

Figure 17. Low frequency oscillator subassembly.

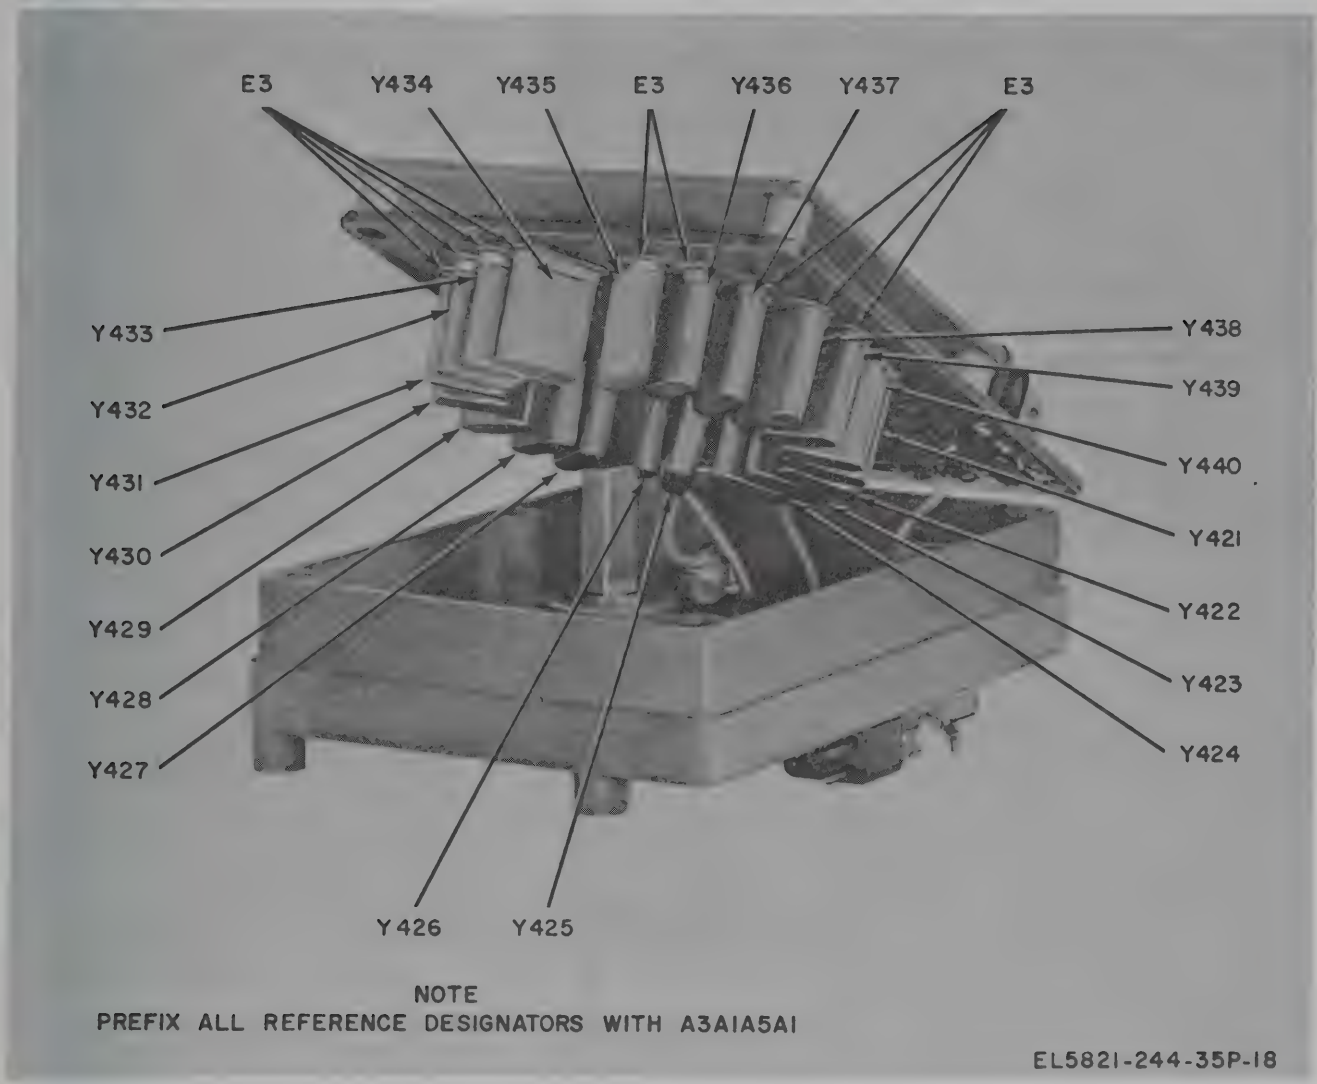

Figure 18. Low frequency oscillator subassembly.

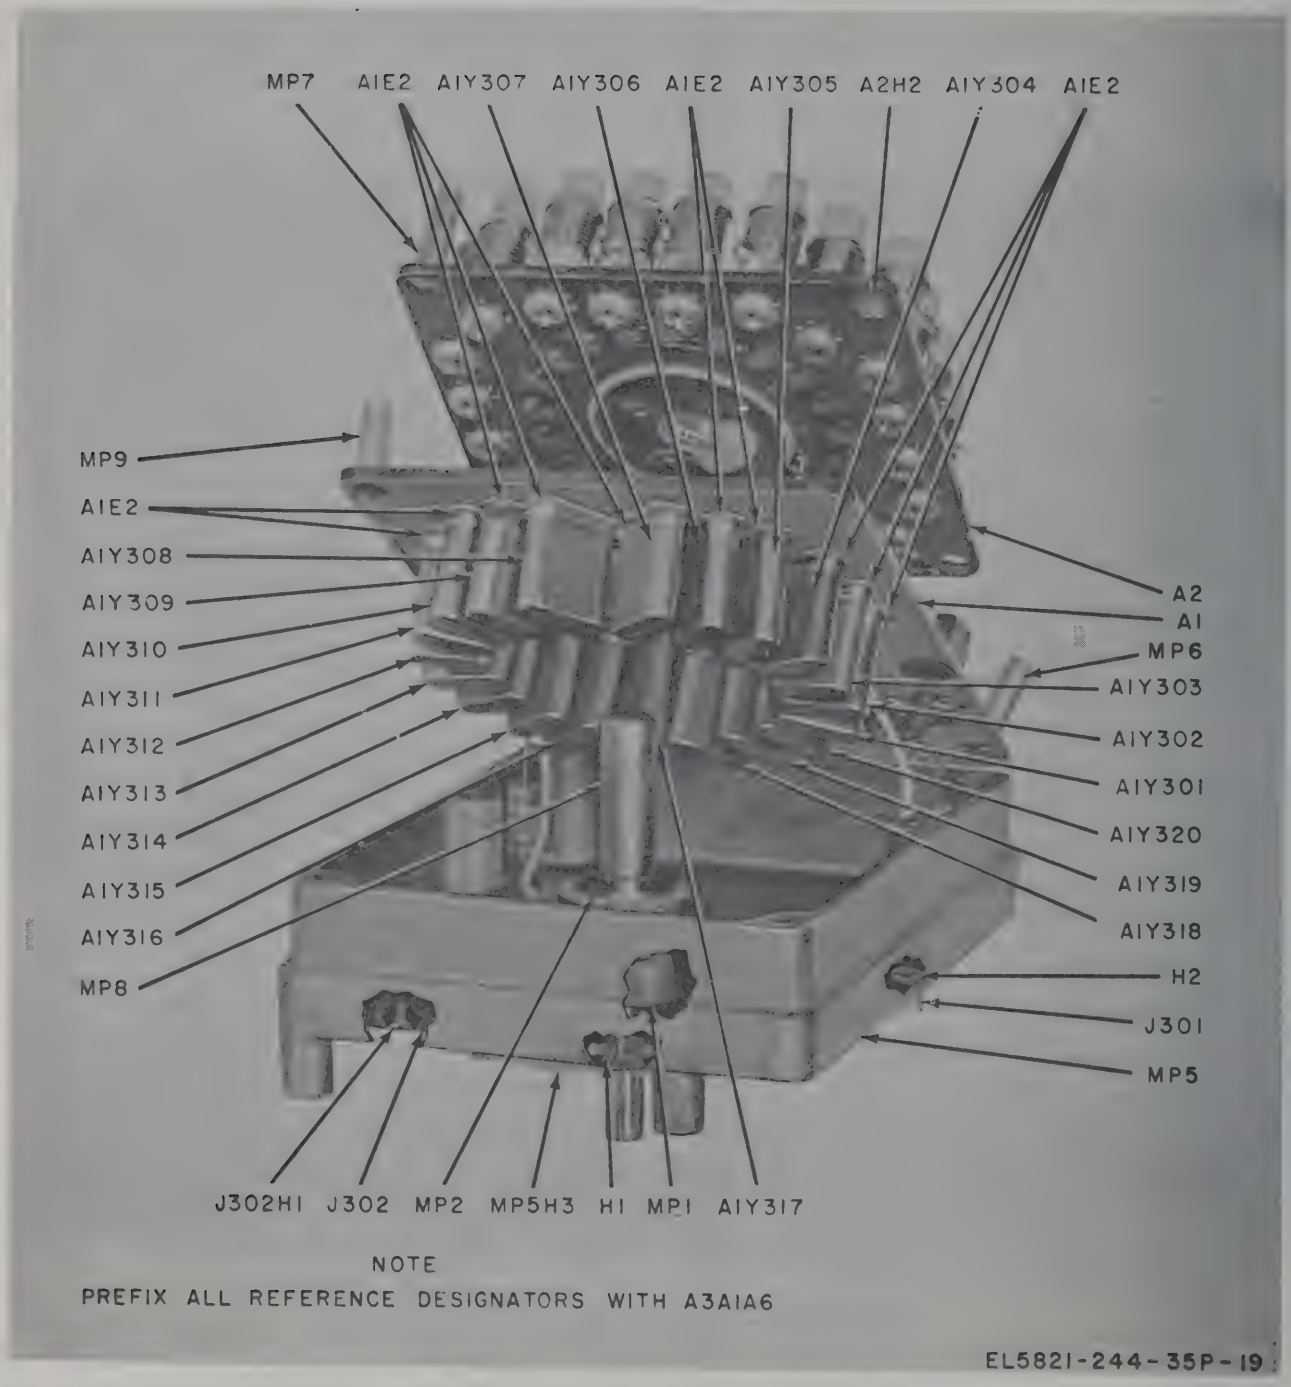

Figure 19. High frequency oscillator.

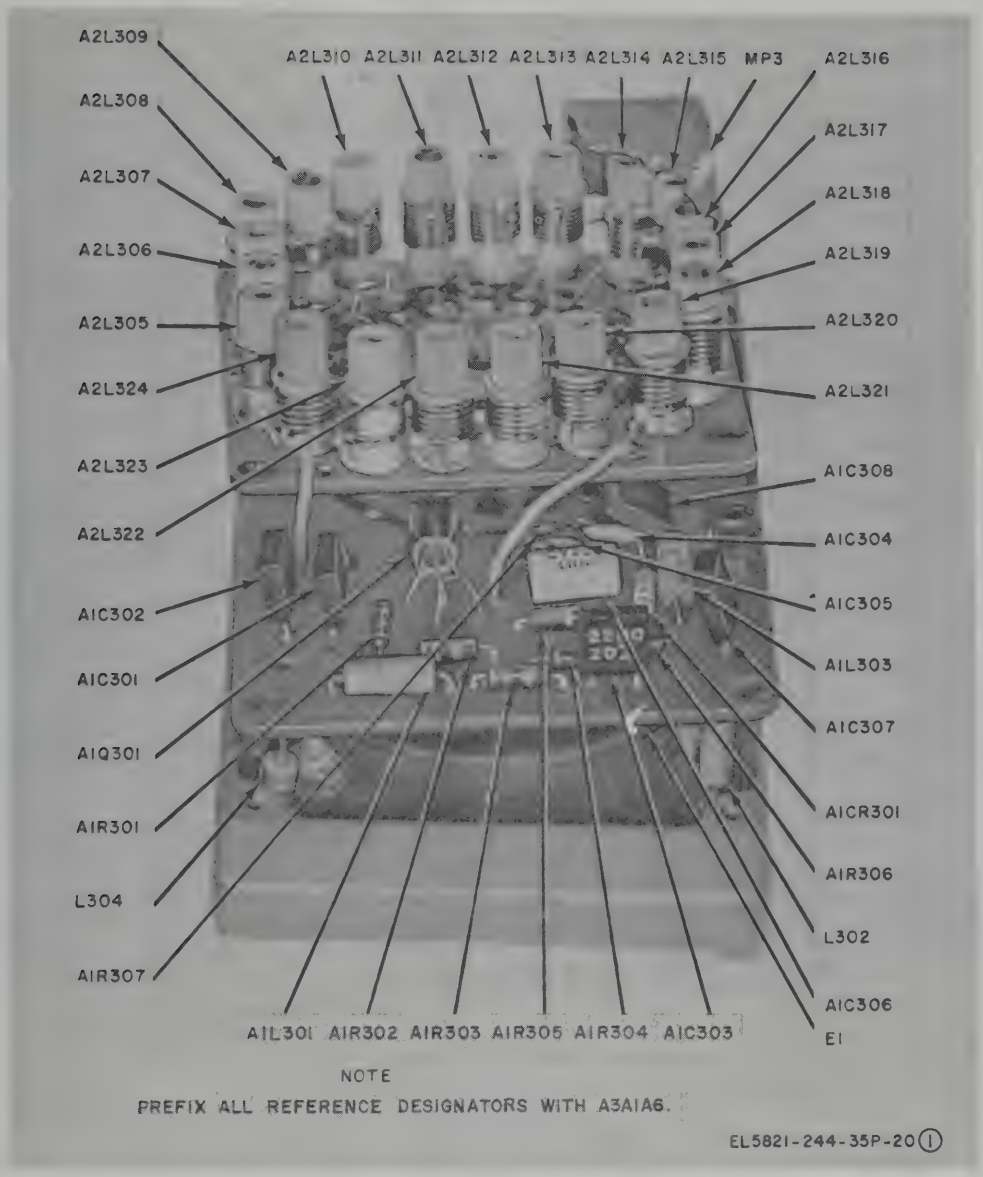

Figure 20. High frequency oscillator subassembly (sheet 1 of 2).

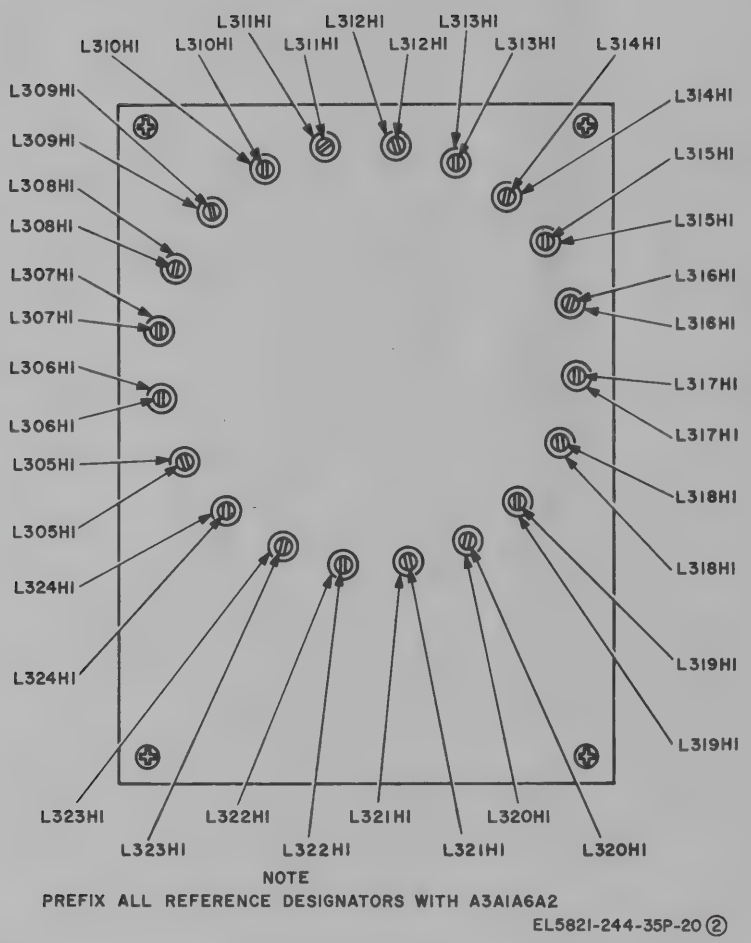

Figure 20. High frequency oscillator subassembly (sheet 2 of 2).

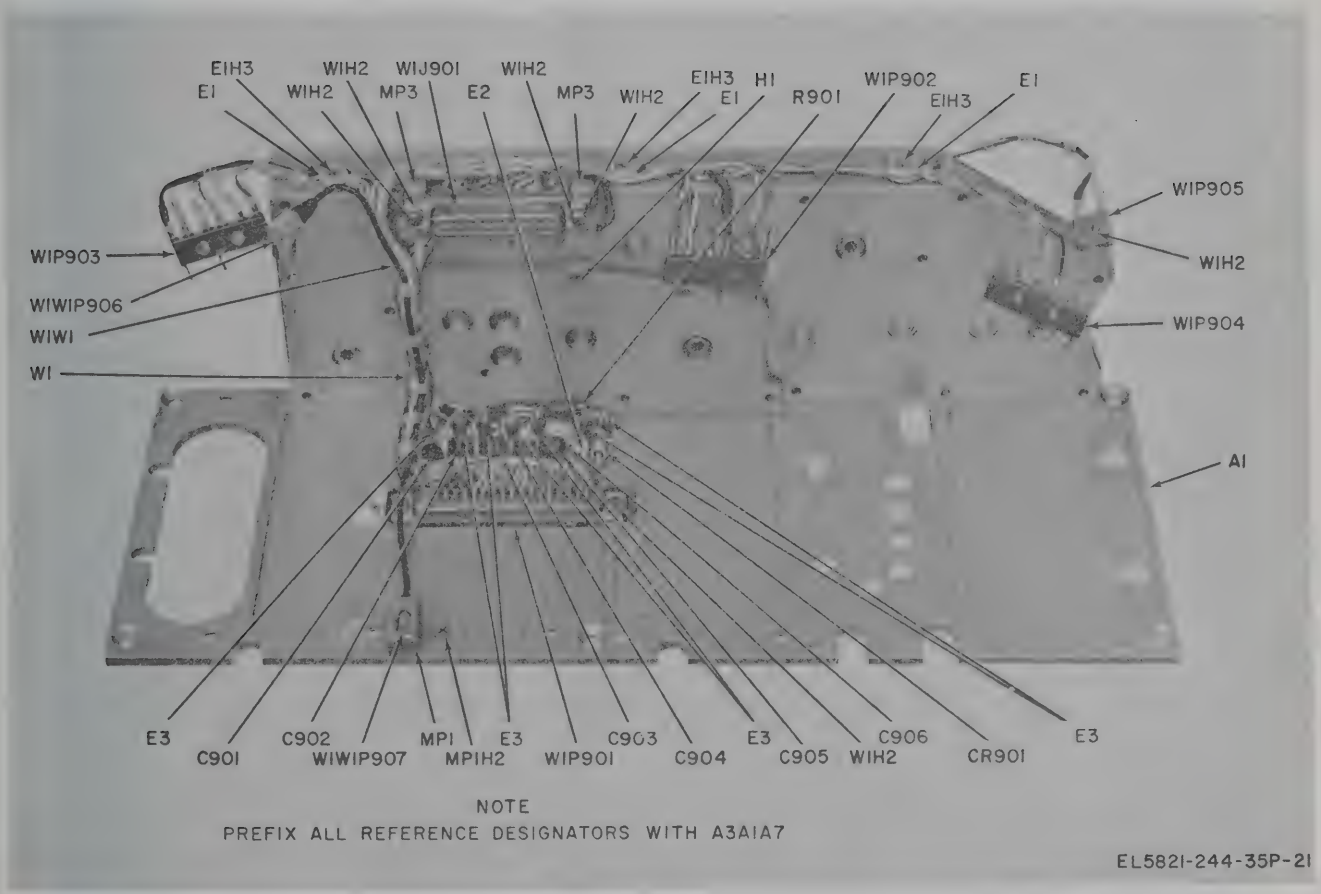

Figure 21. RF chassis subassembly.

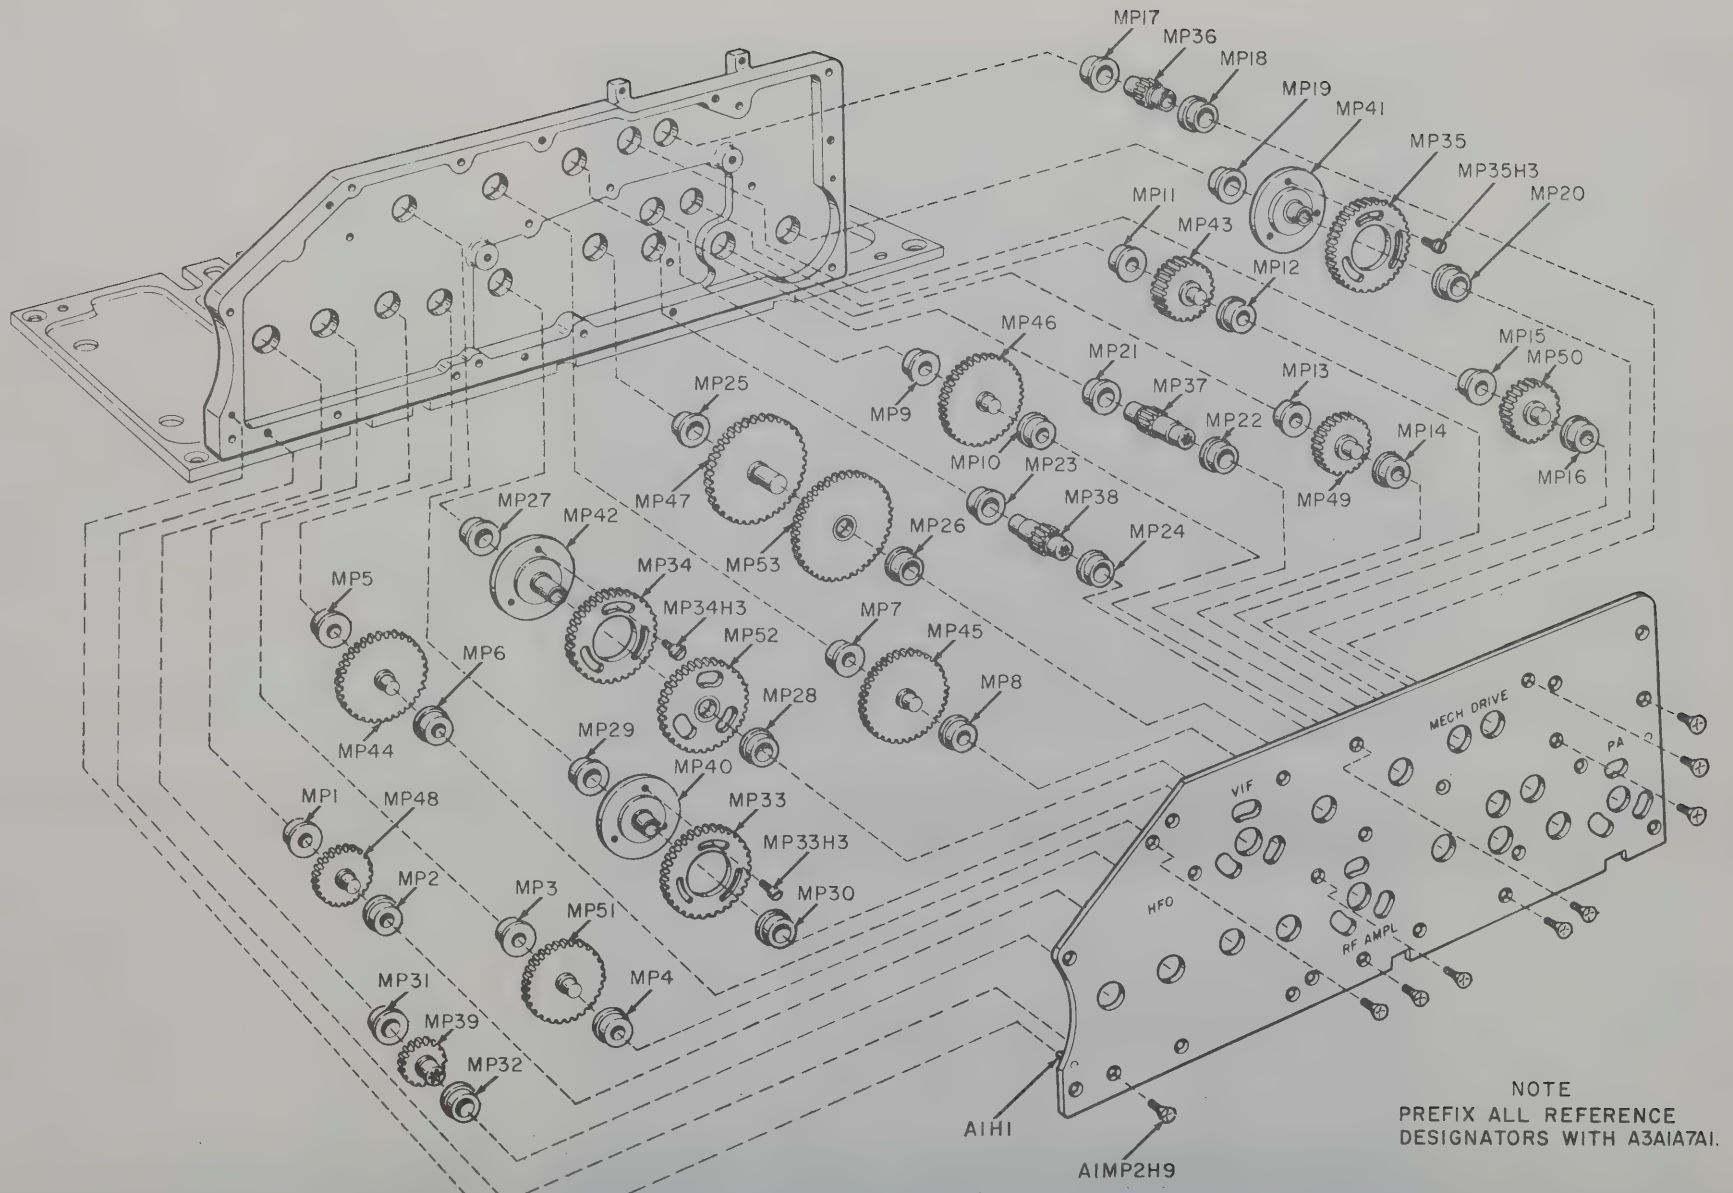

Figure 22. RF chassis.

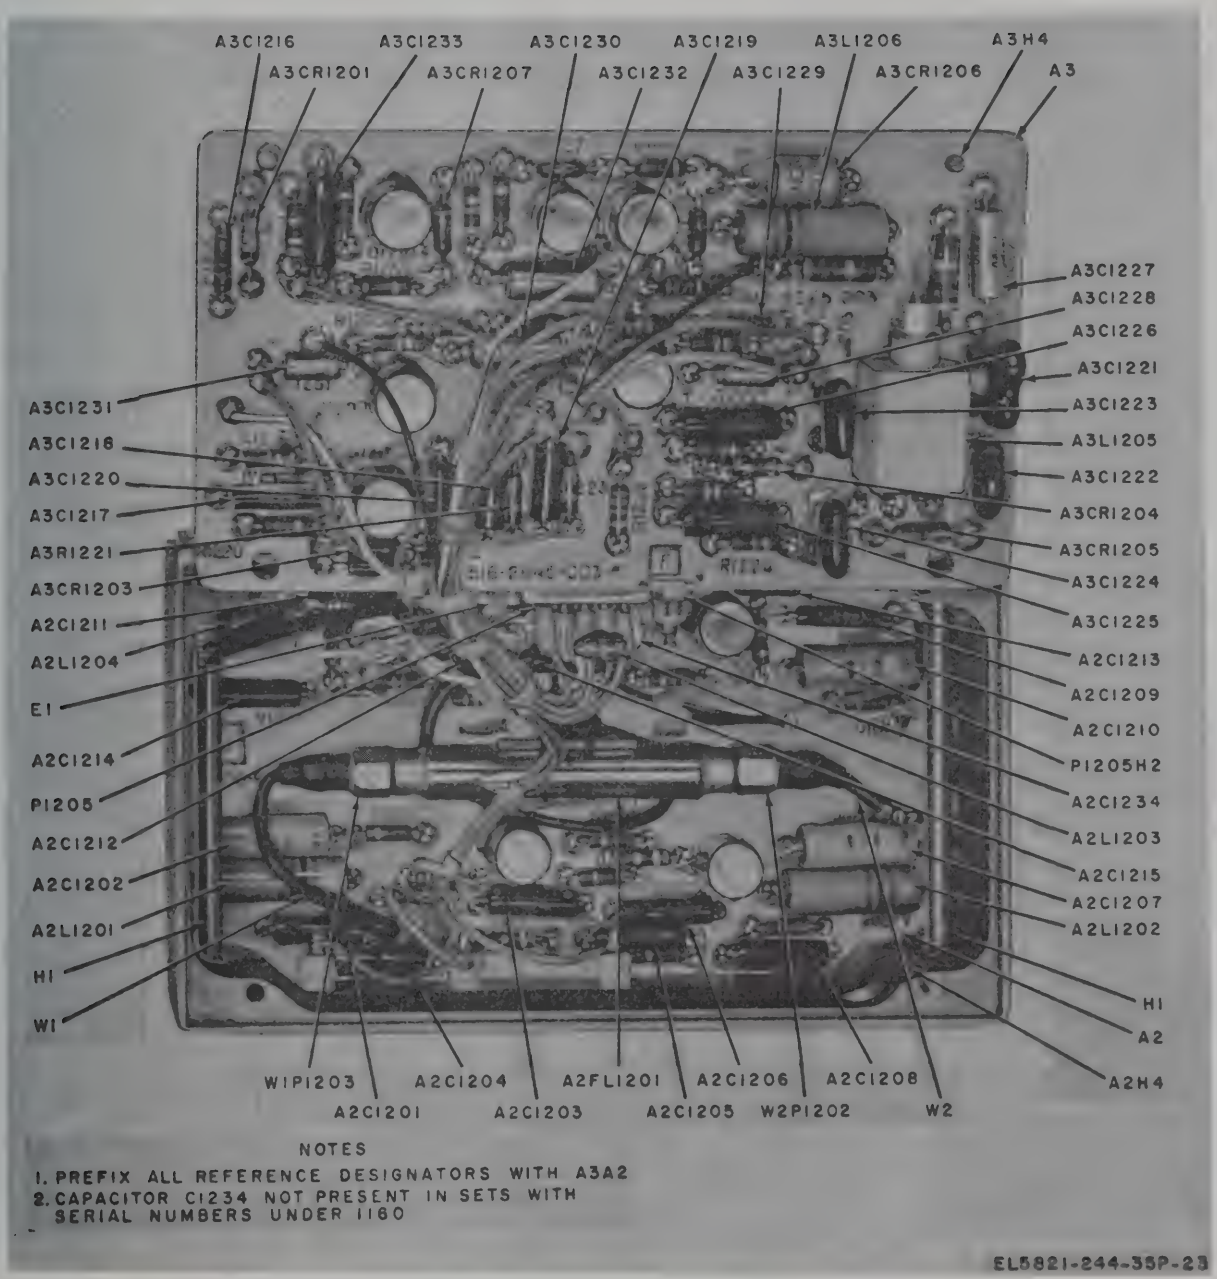

Figure 23. Fixed IF amplifier.

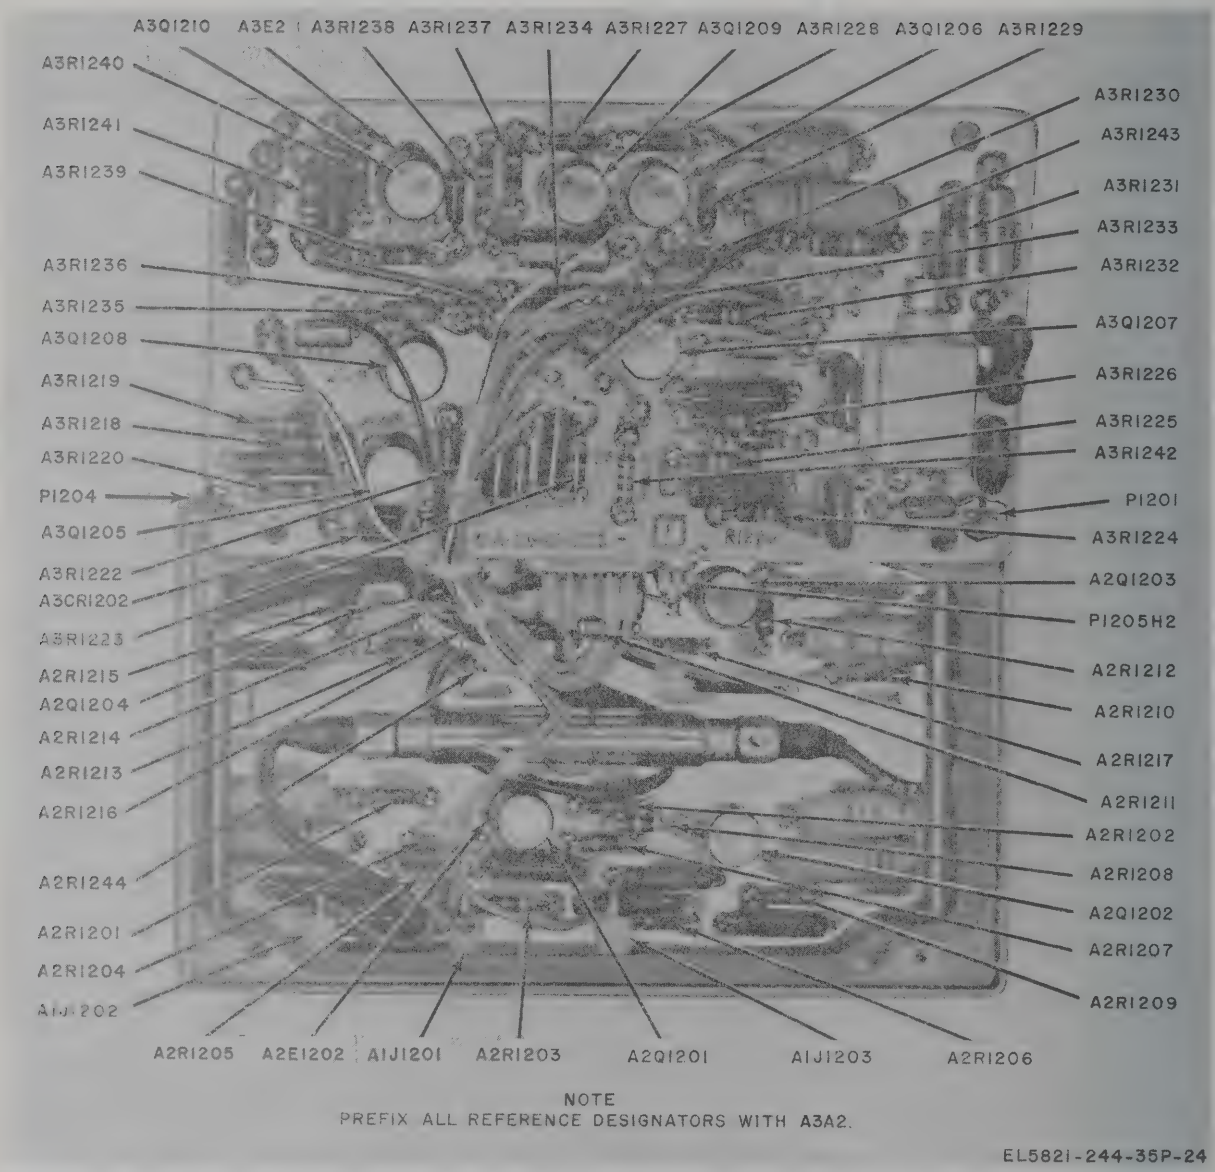

Figure 24. Fixed IF amplifier.

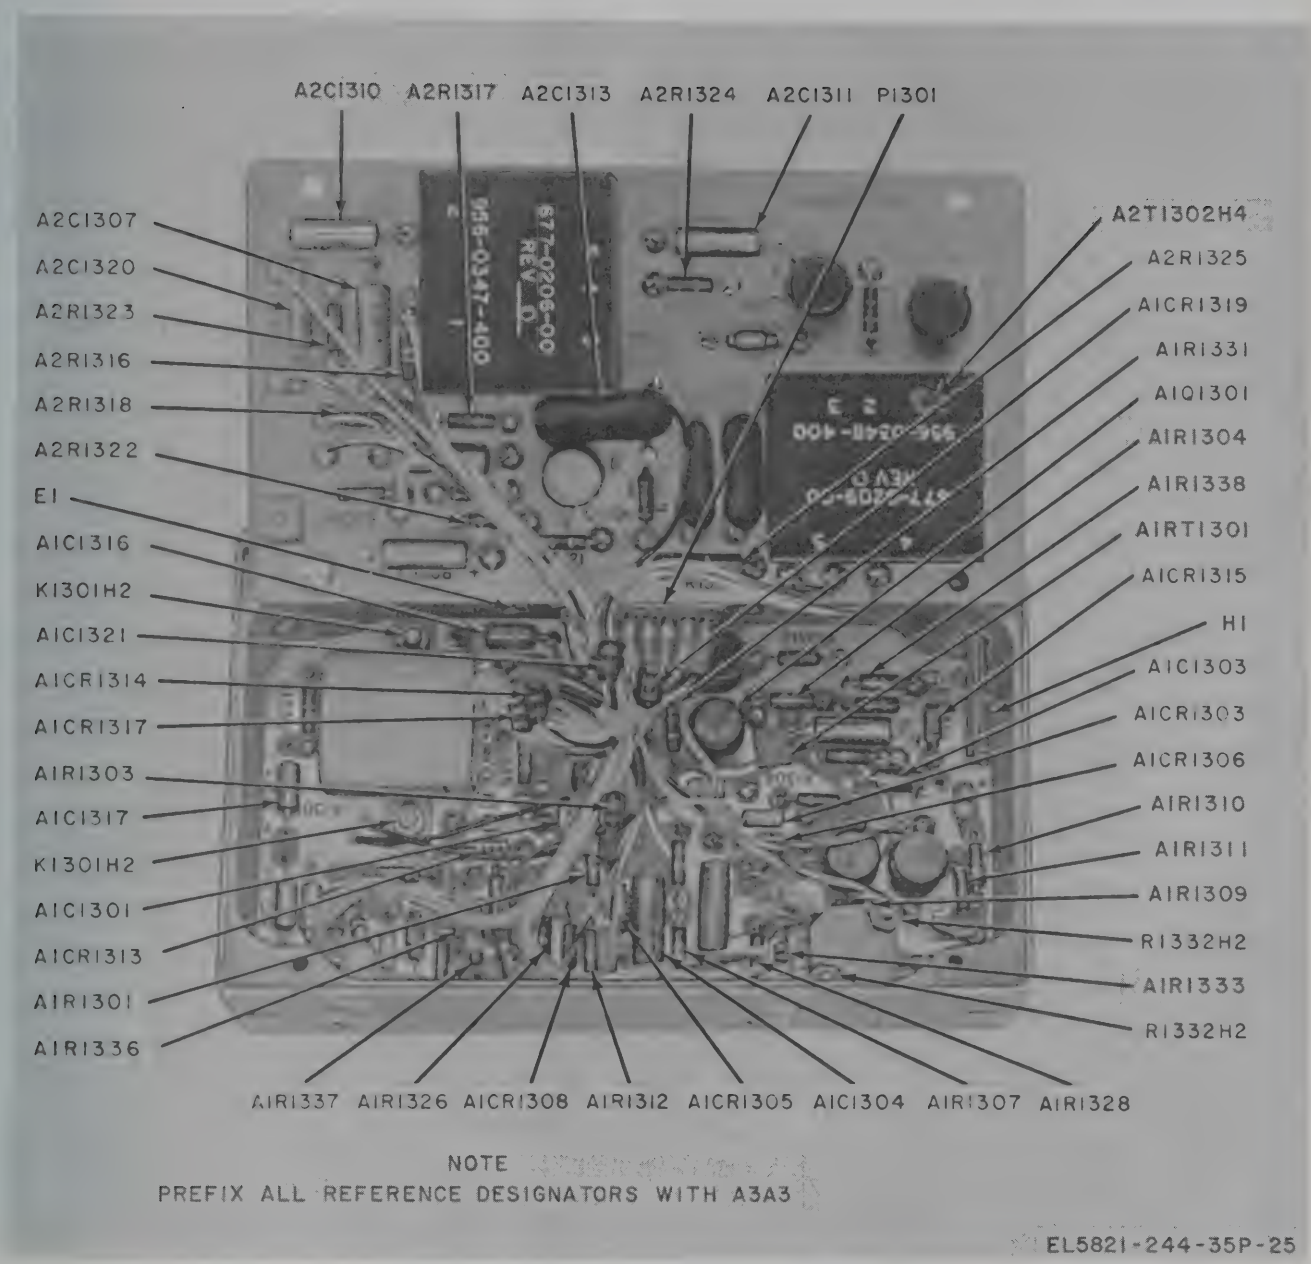

Figure 25. Audio receiver assembly.

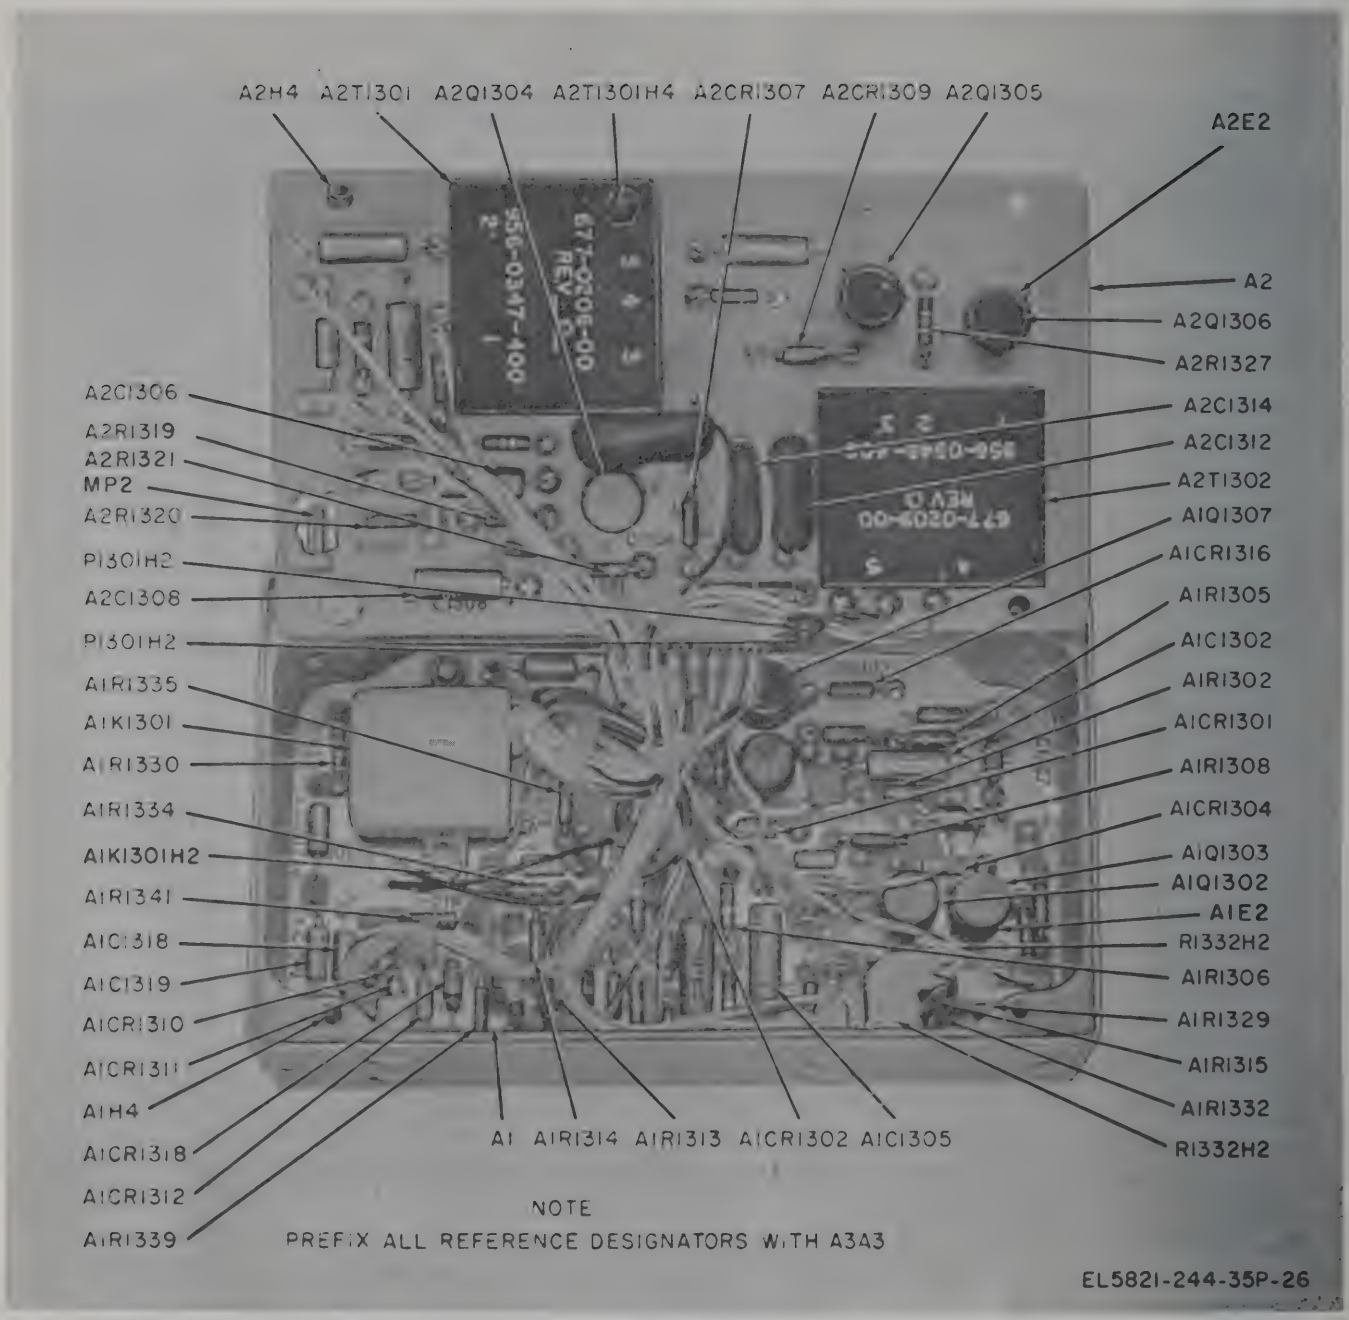

Figure 26. Audio receiver assembly.

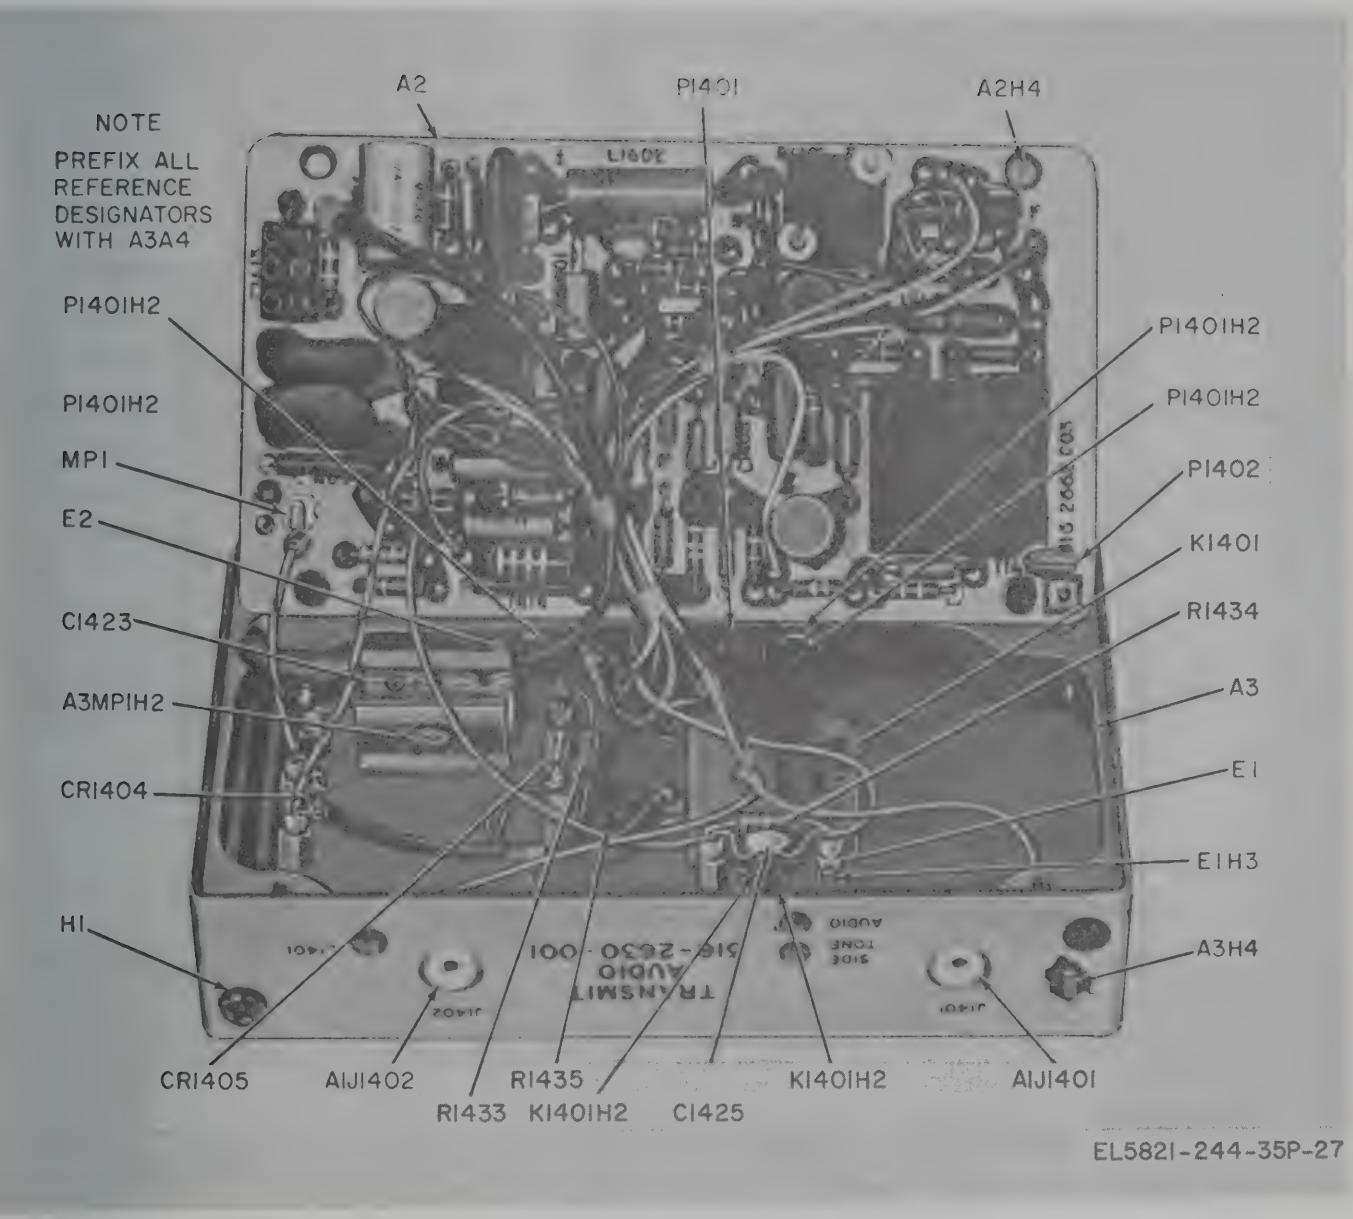

Figure 27. Audio transmitter assembly.

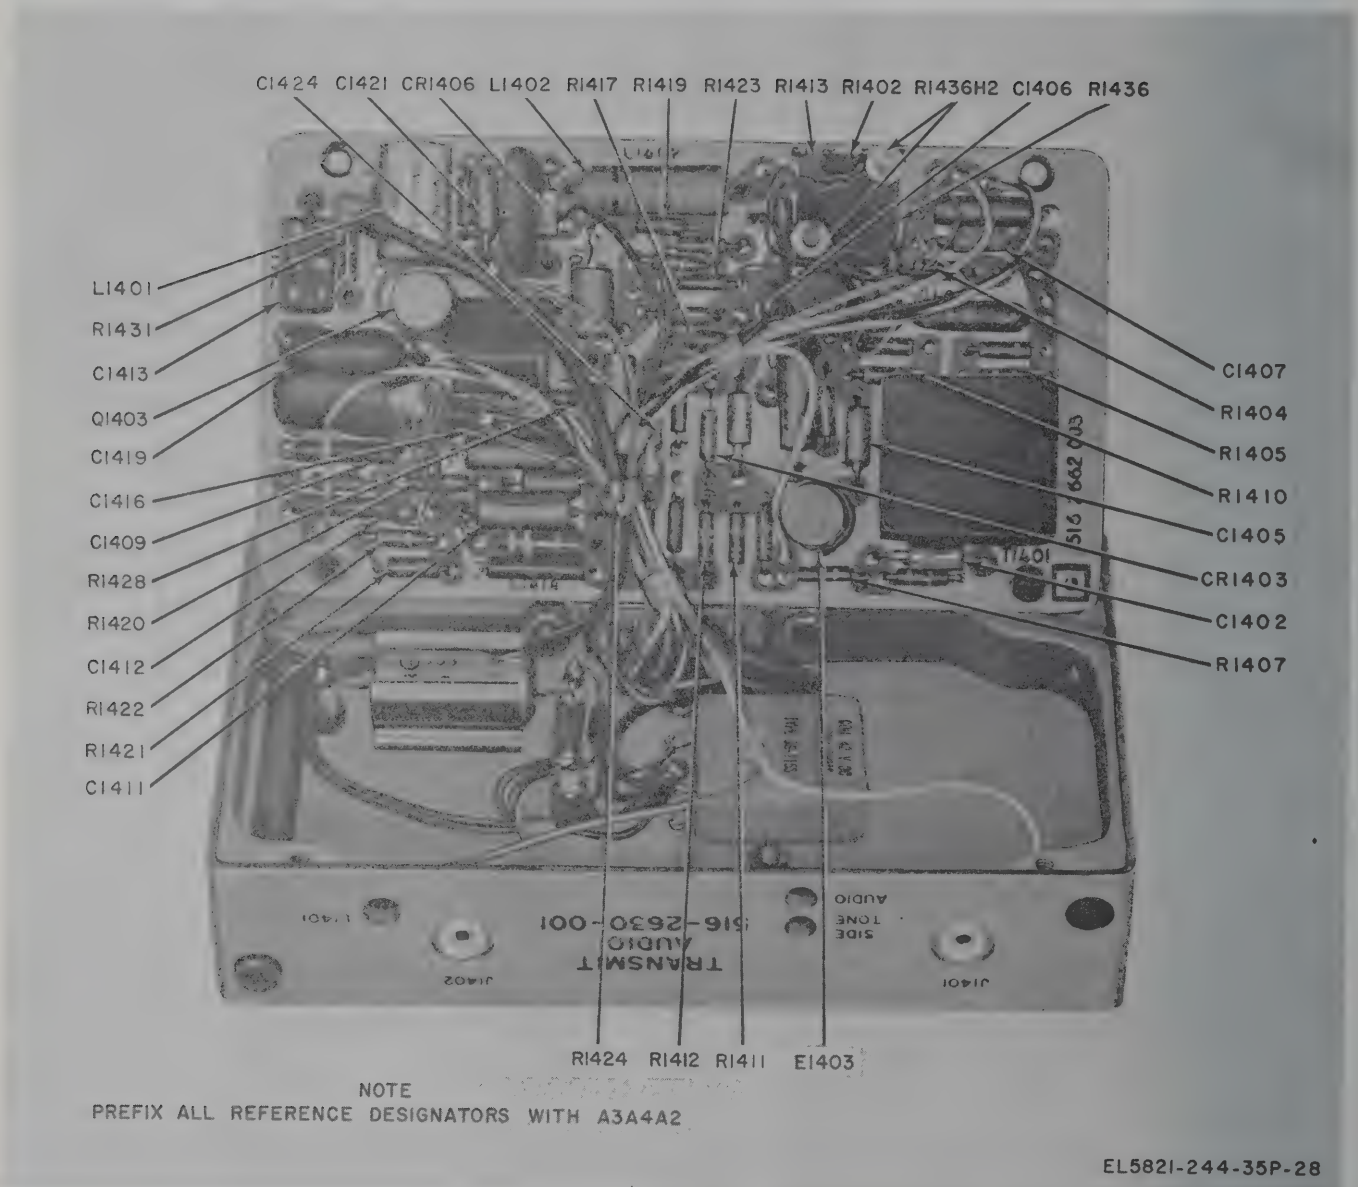

Figure 28. Audio transmitter assembly.

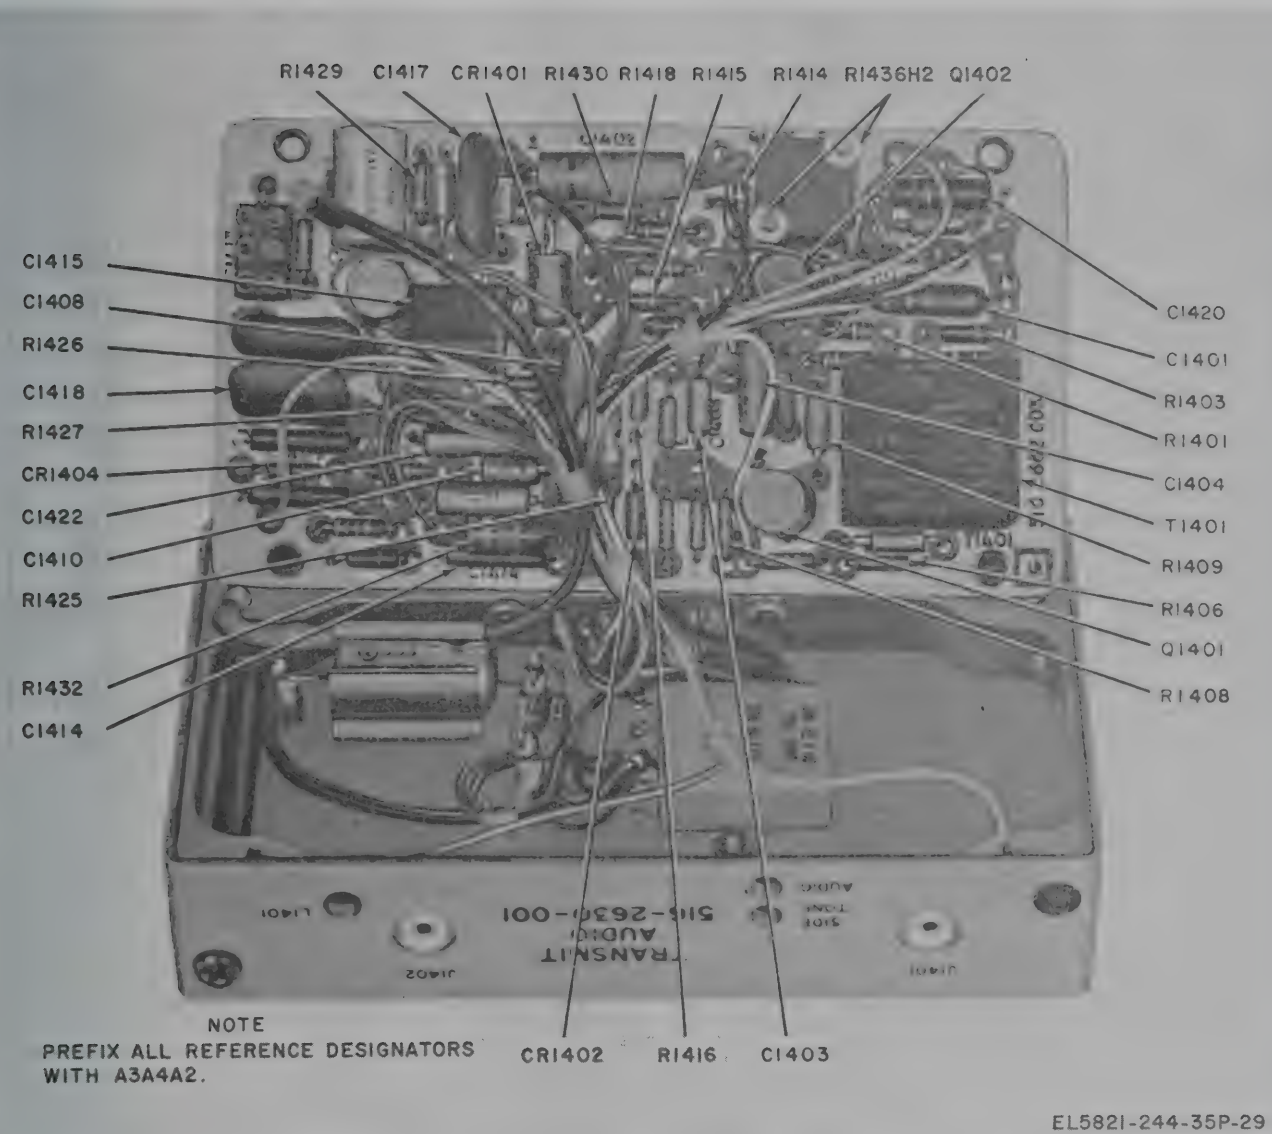

Figure 29. Audio transmitter assembly.

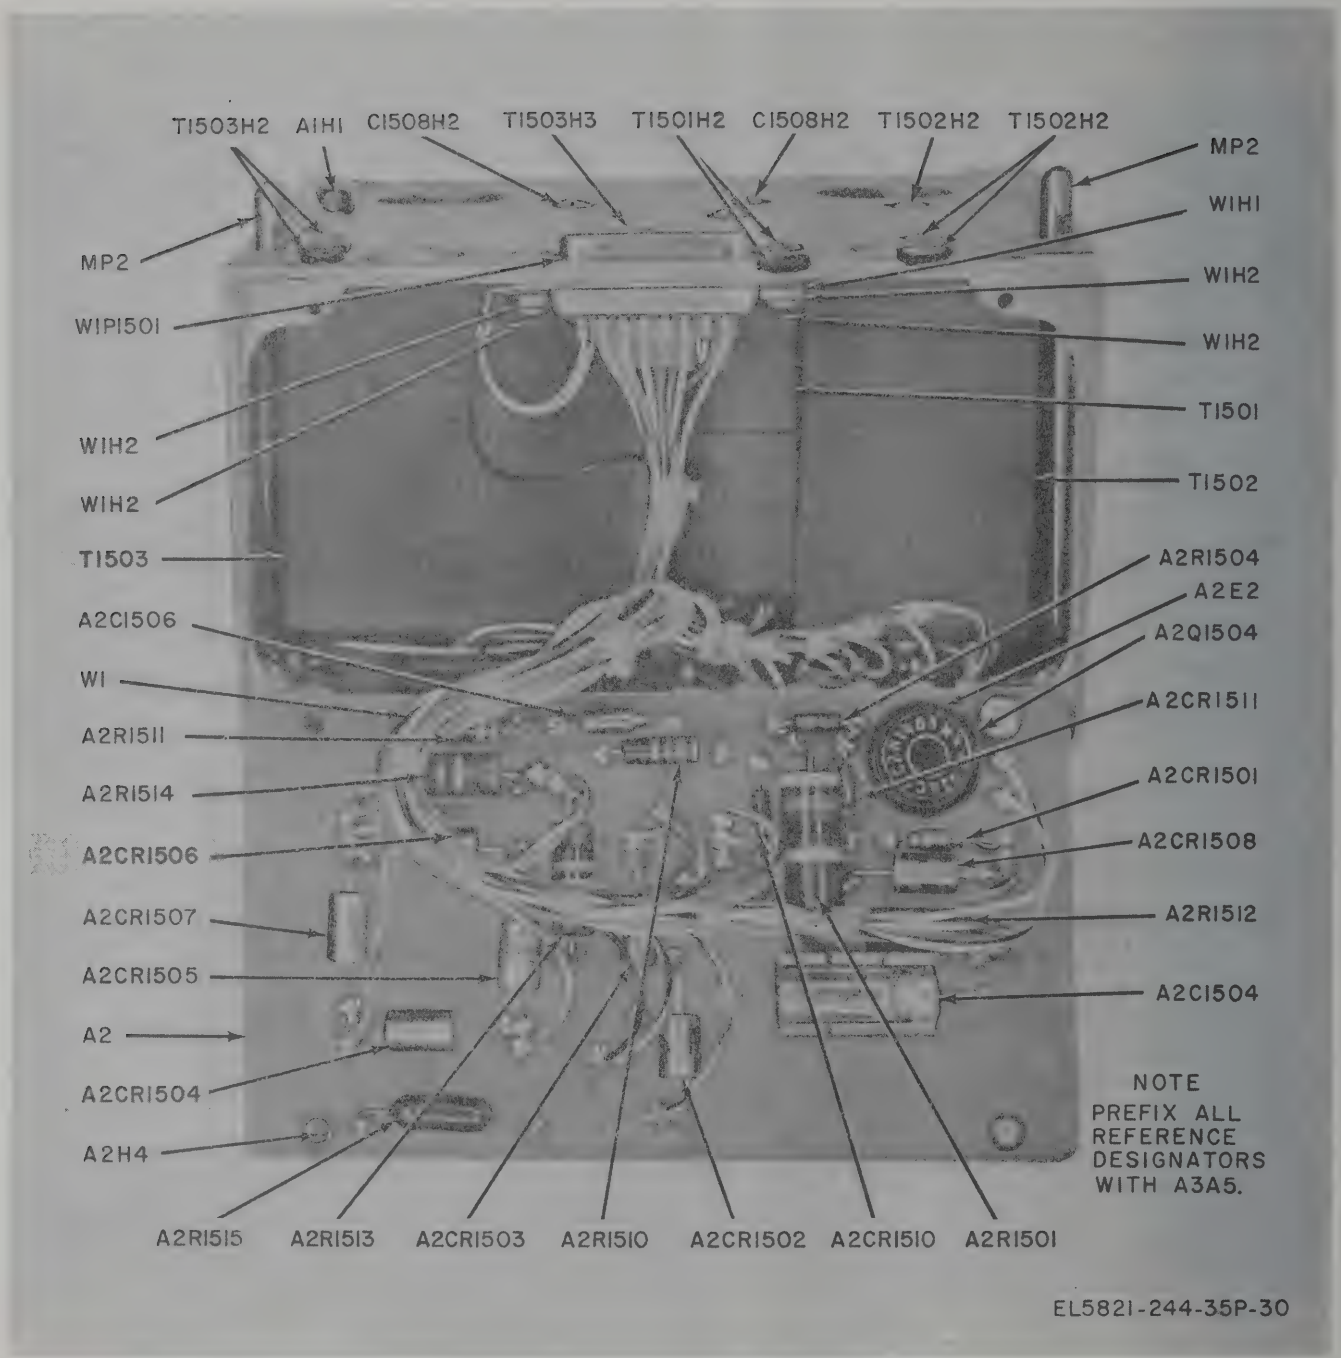

Figure 30. Power supply.

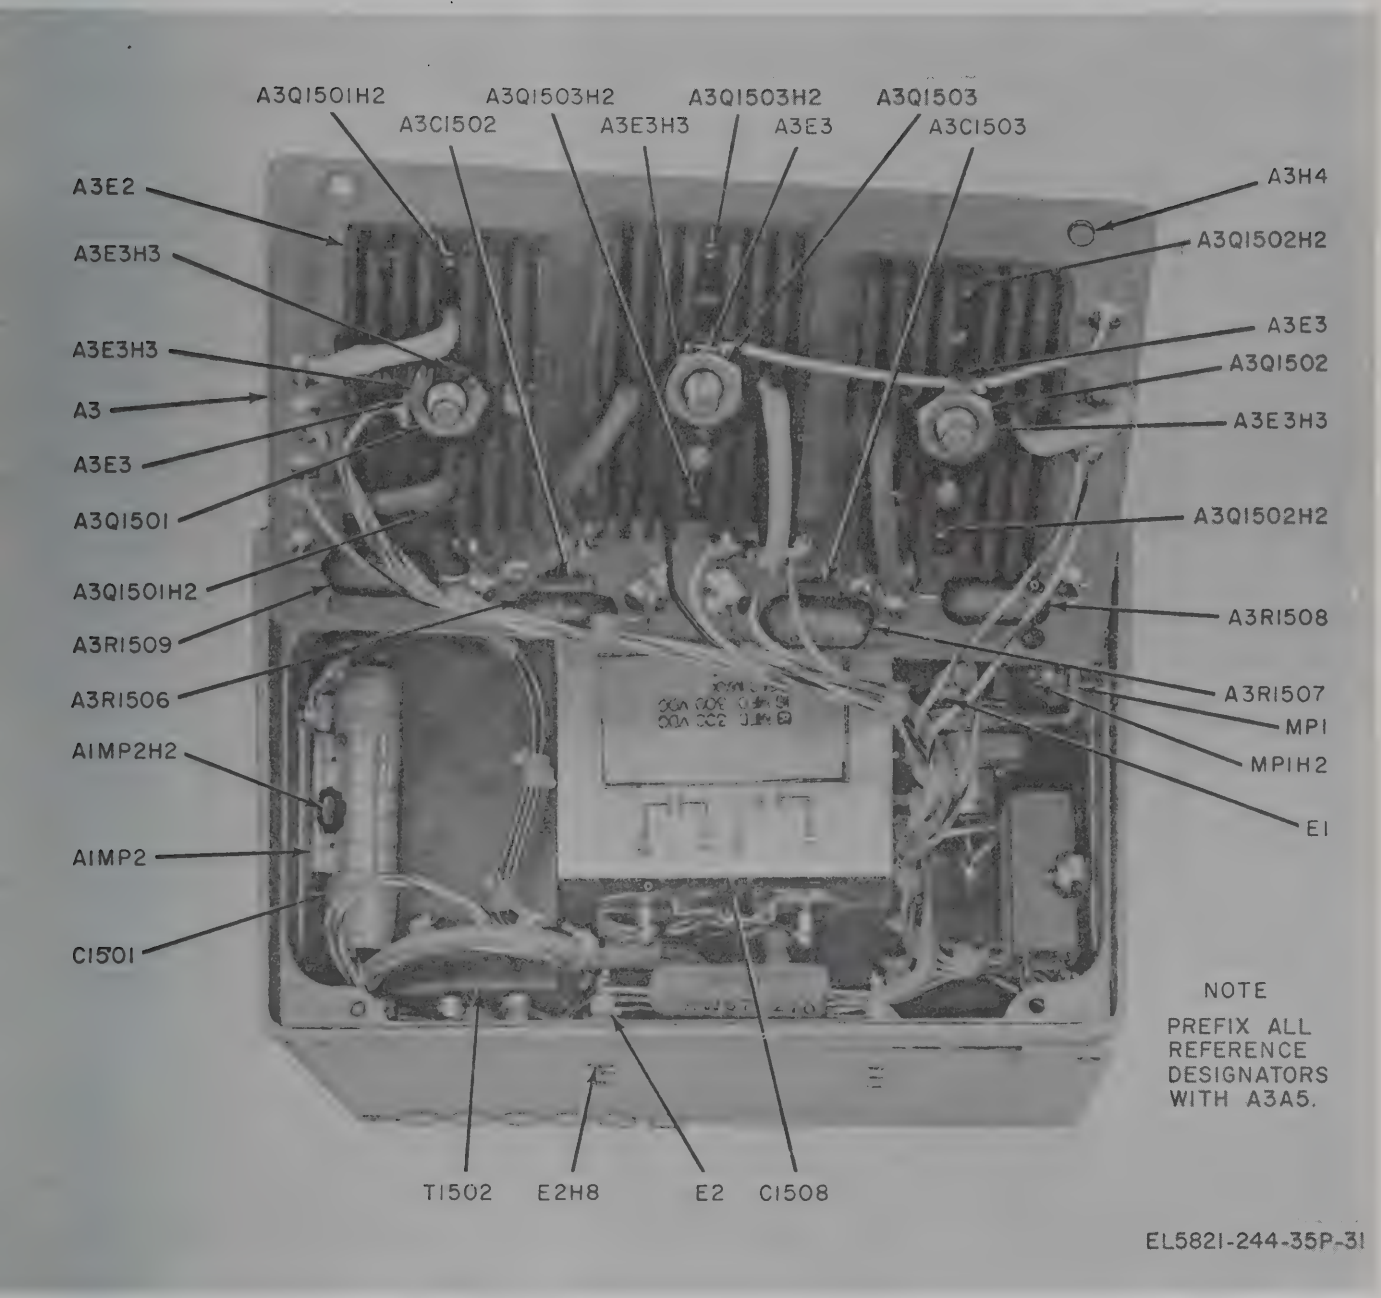

Figure 31. Power supply.

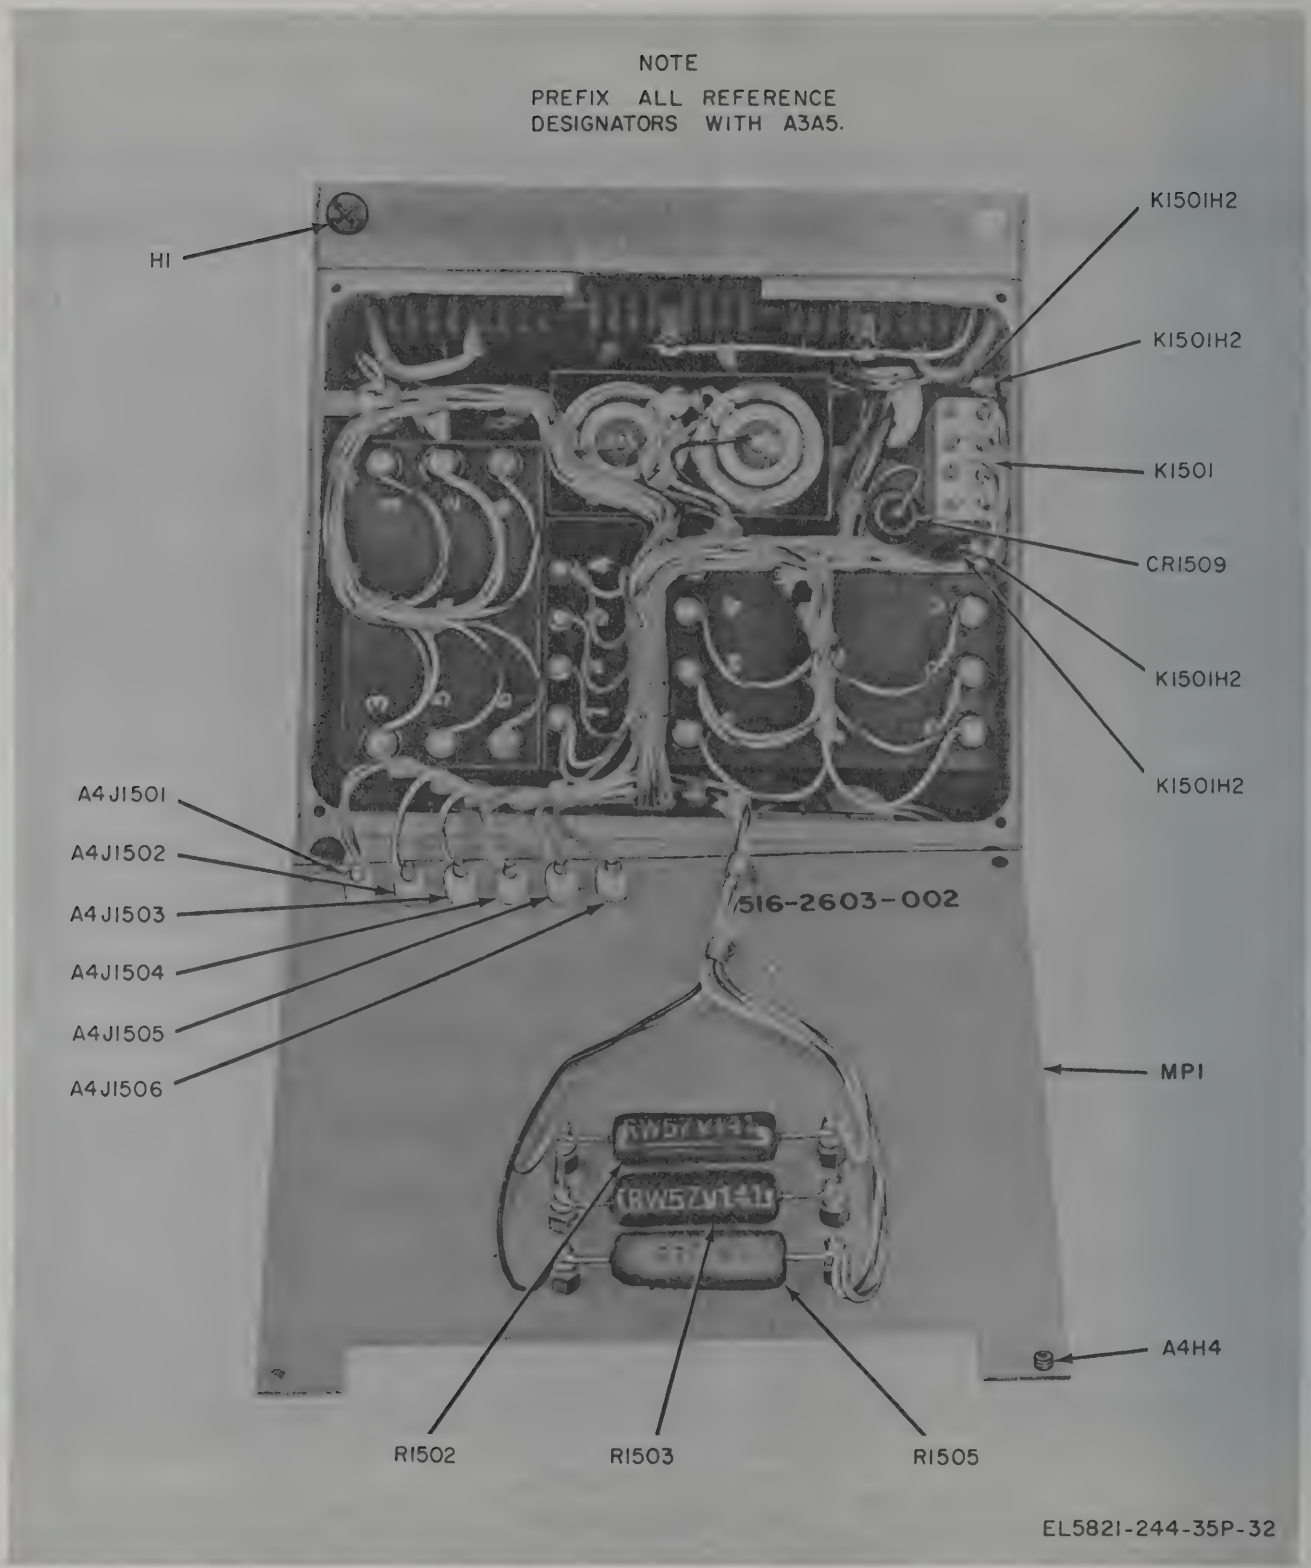

Figure 32. Power supply.

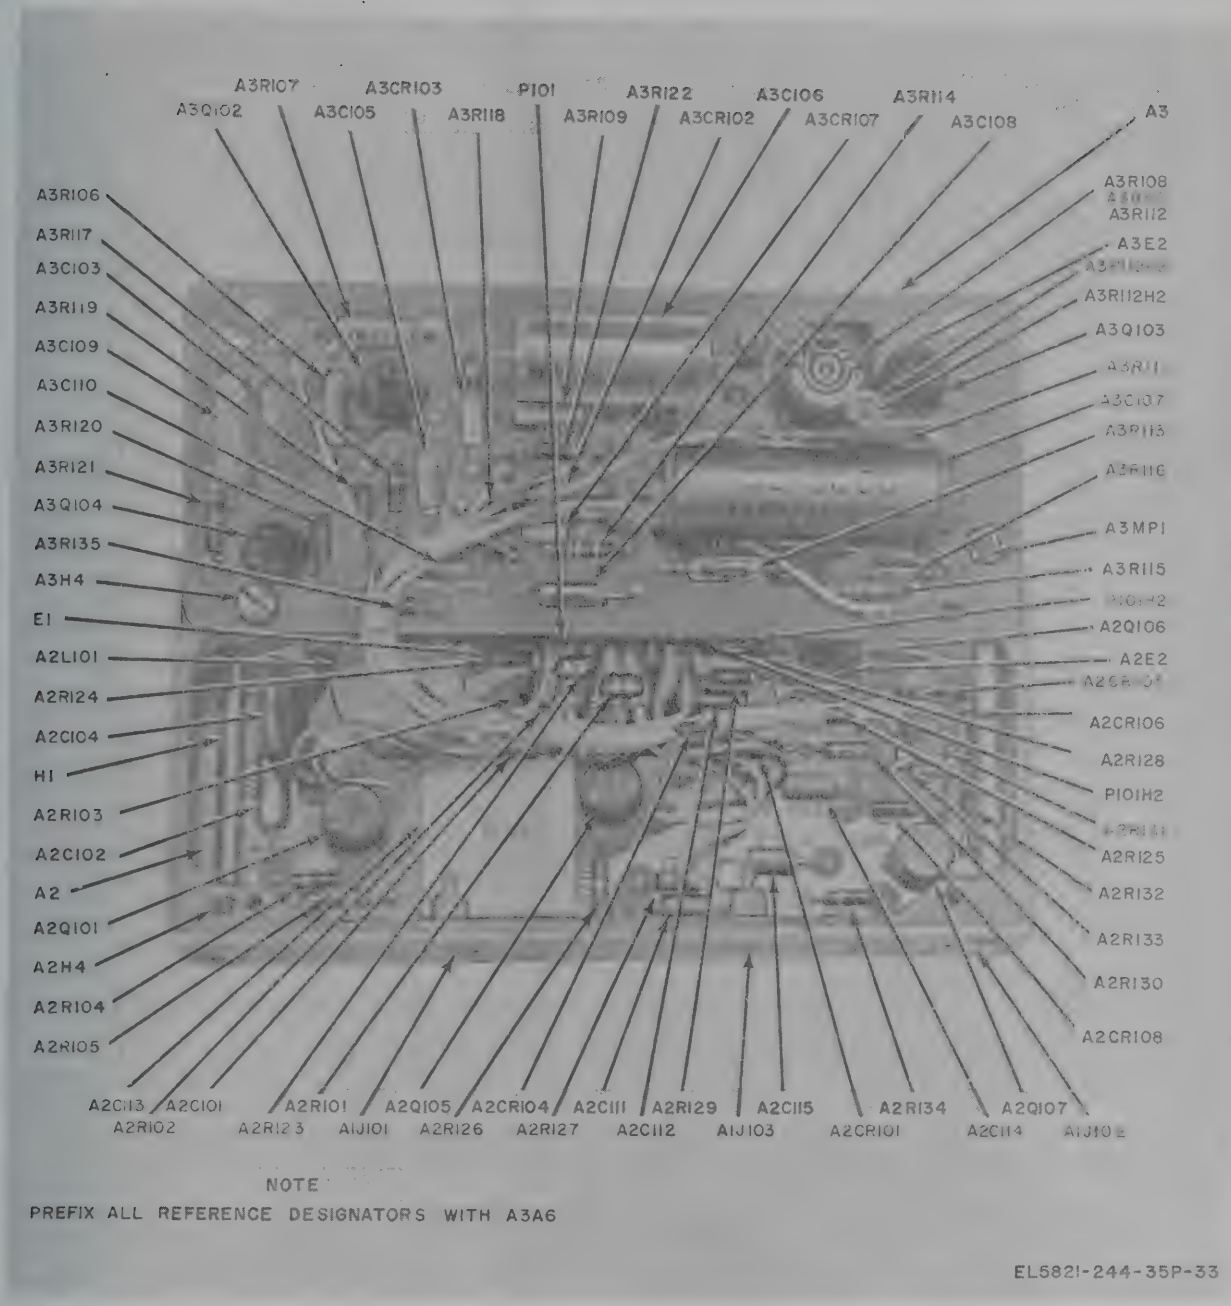

Figure 33. Select call assembly.

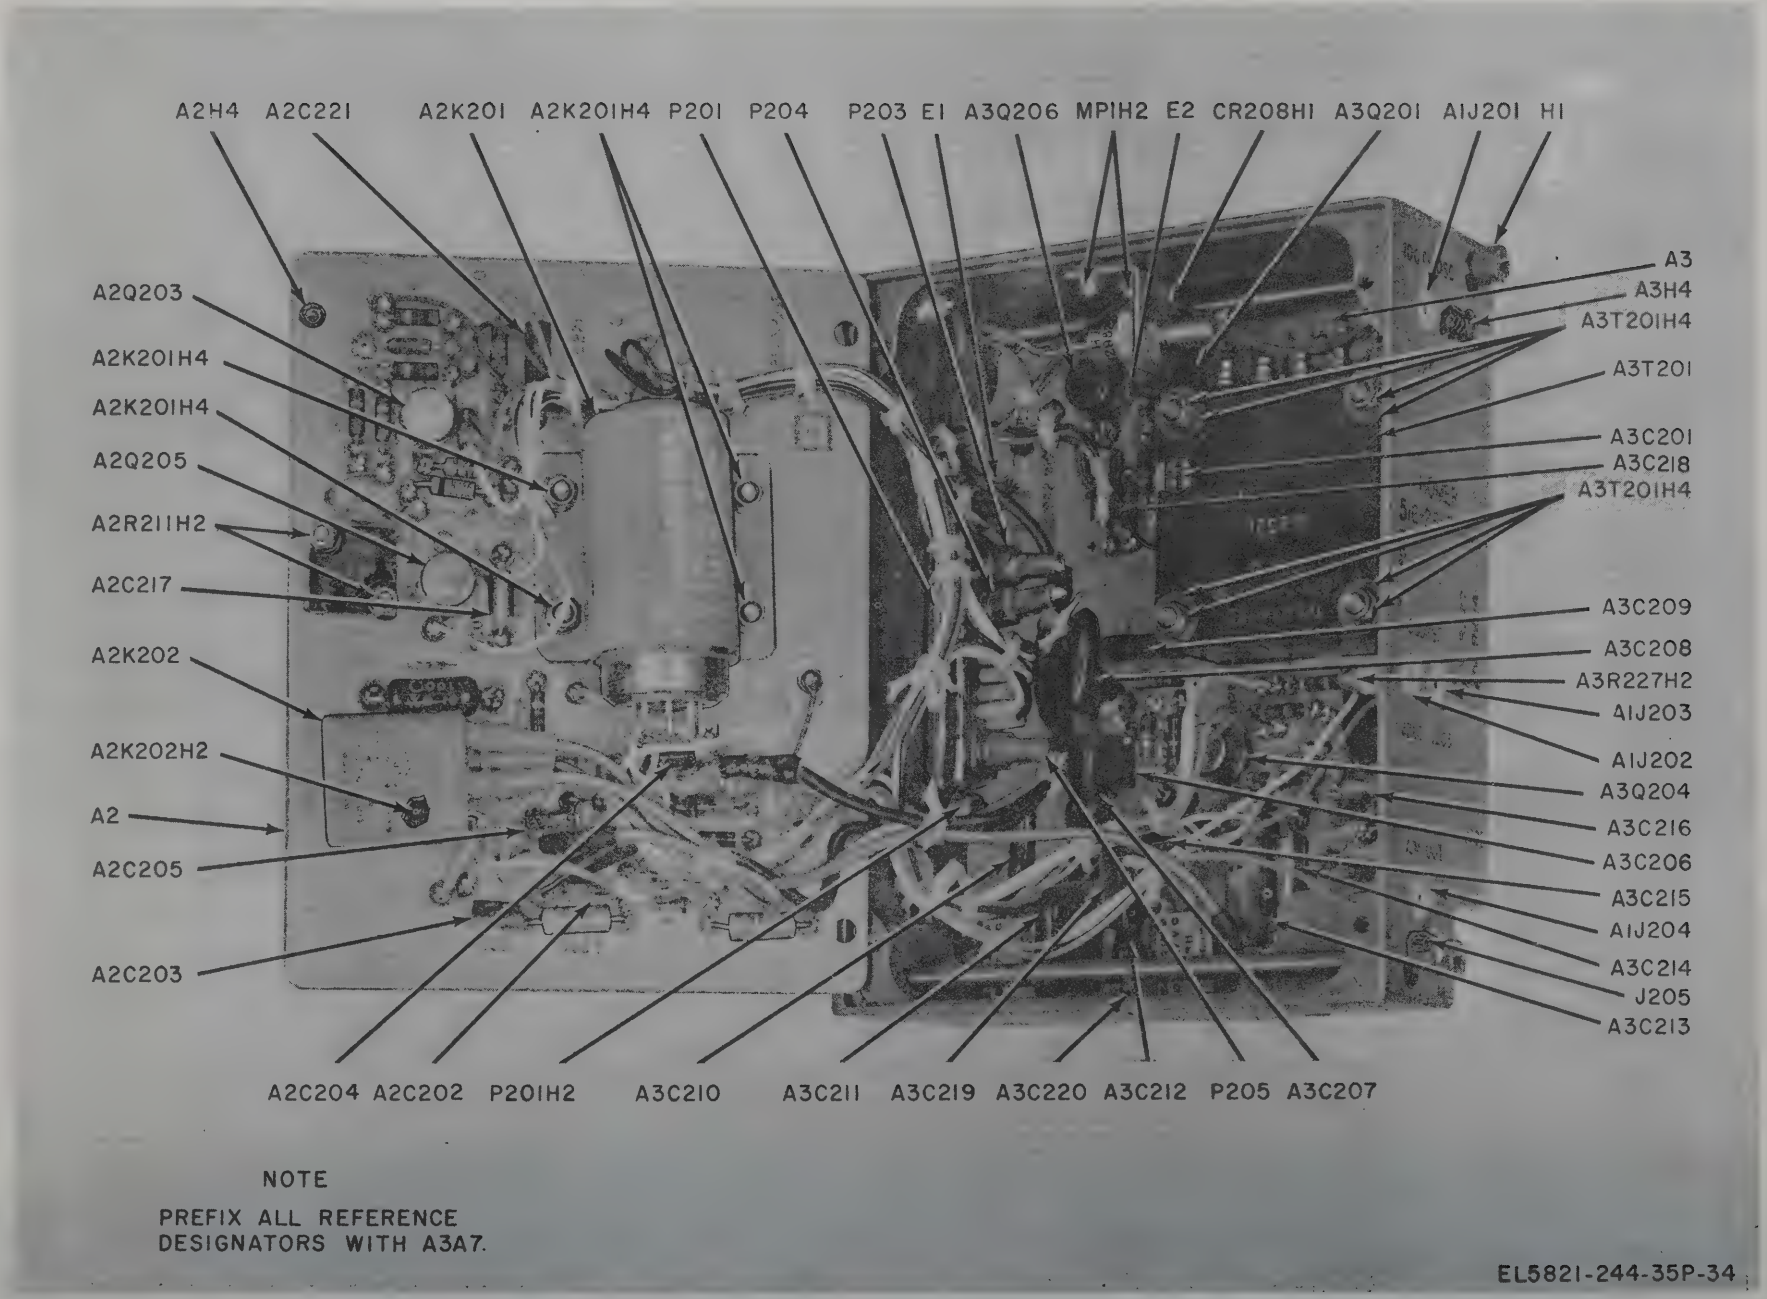

Figure 34. Homer assembly.

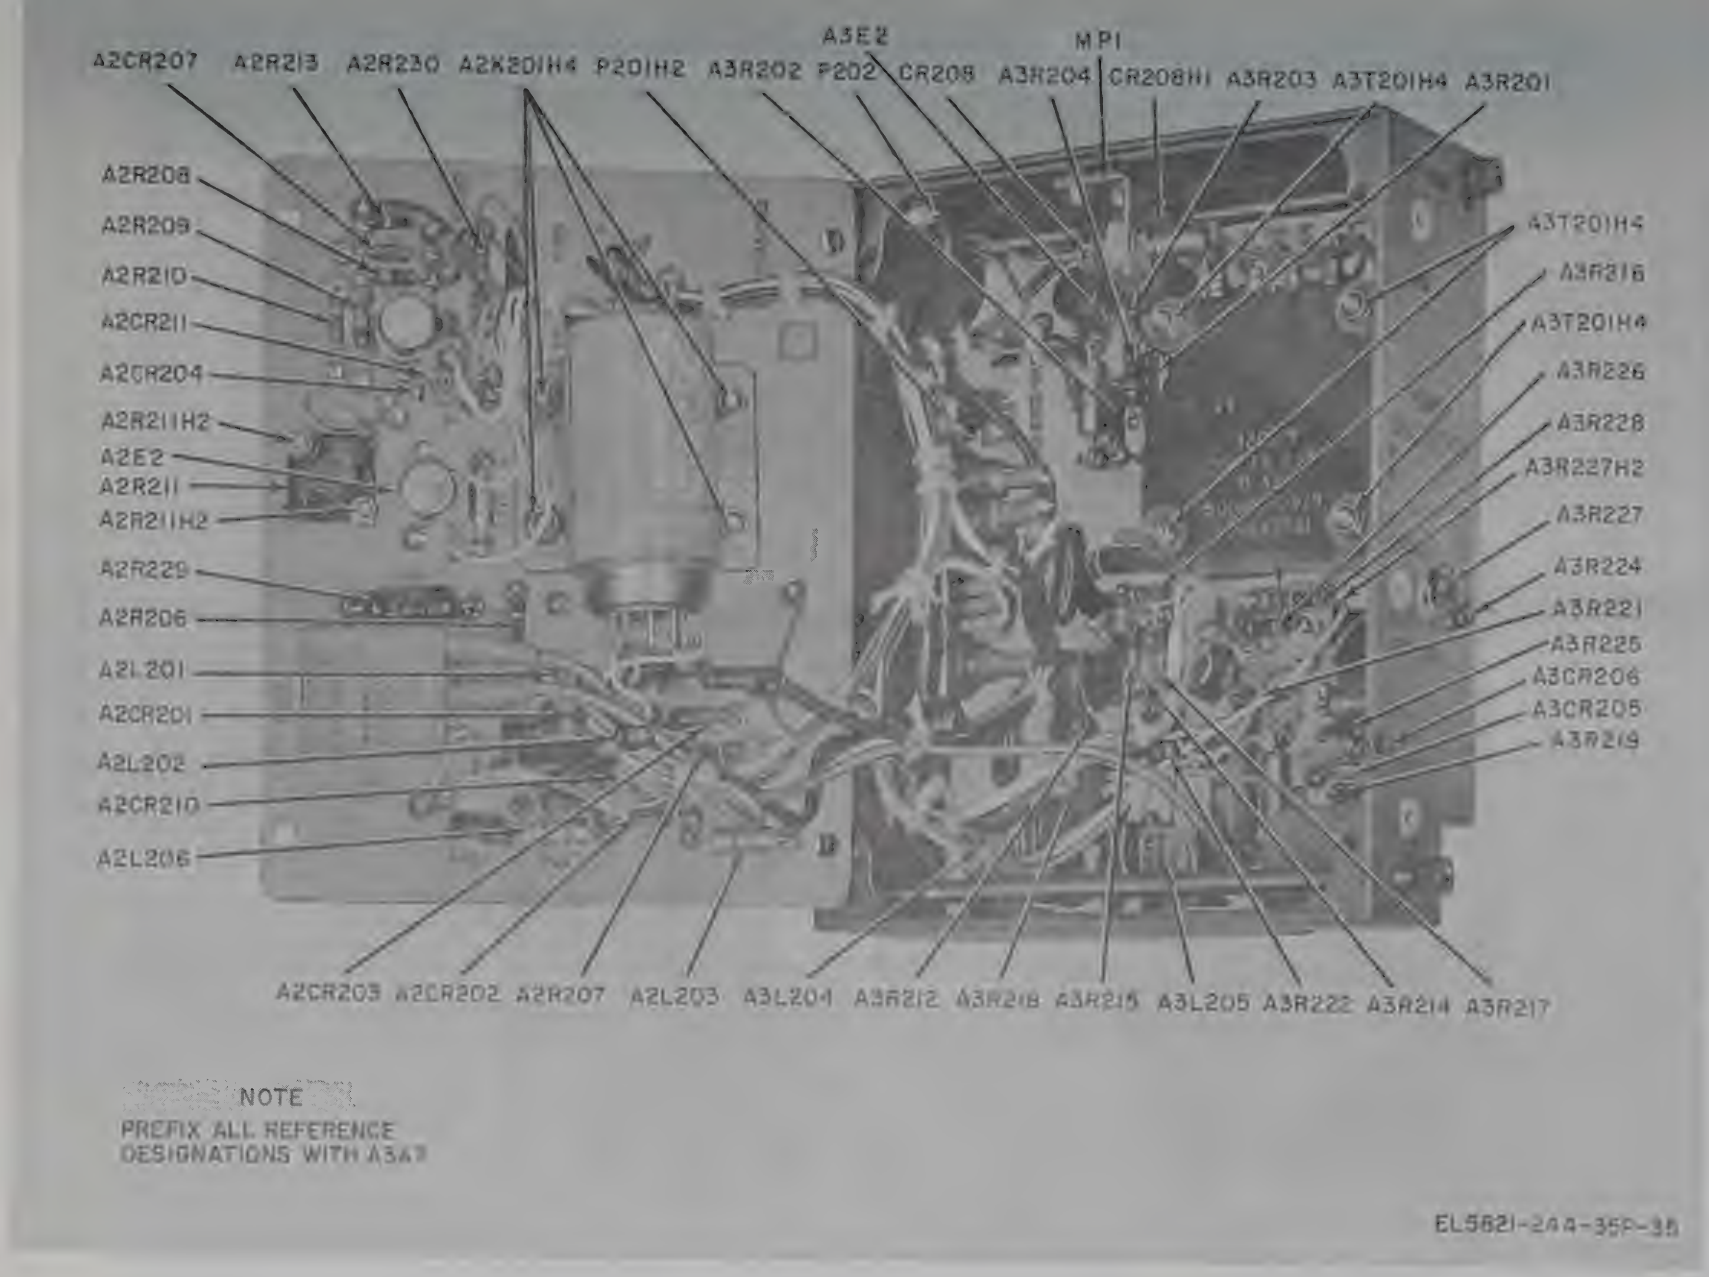

Figure 35. Homer assembly.

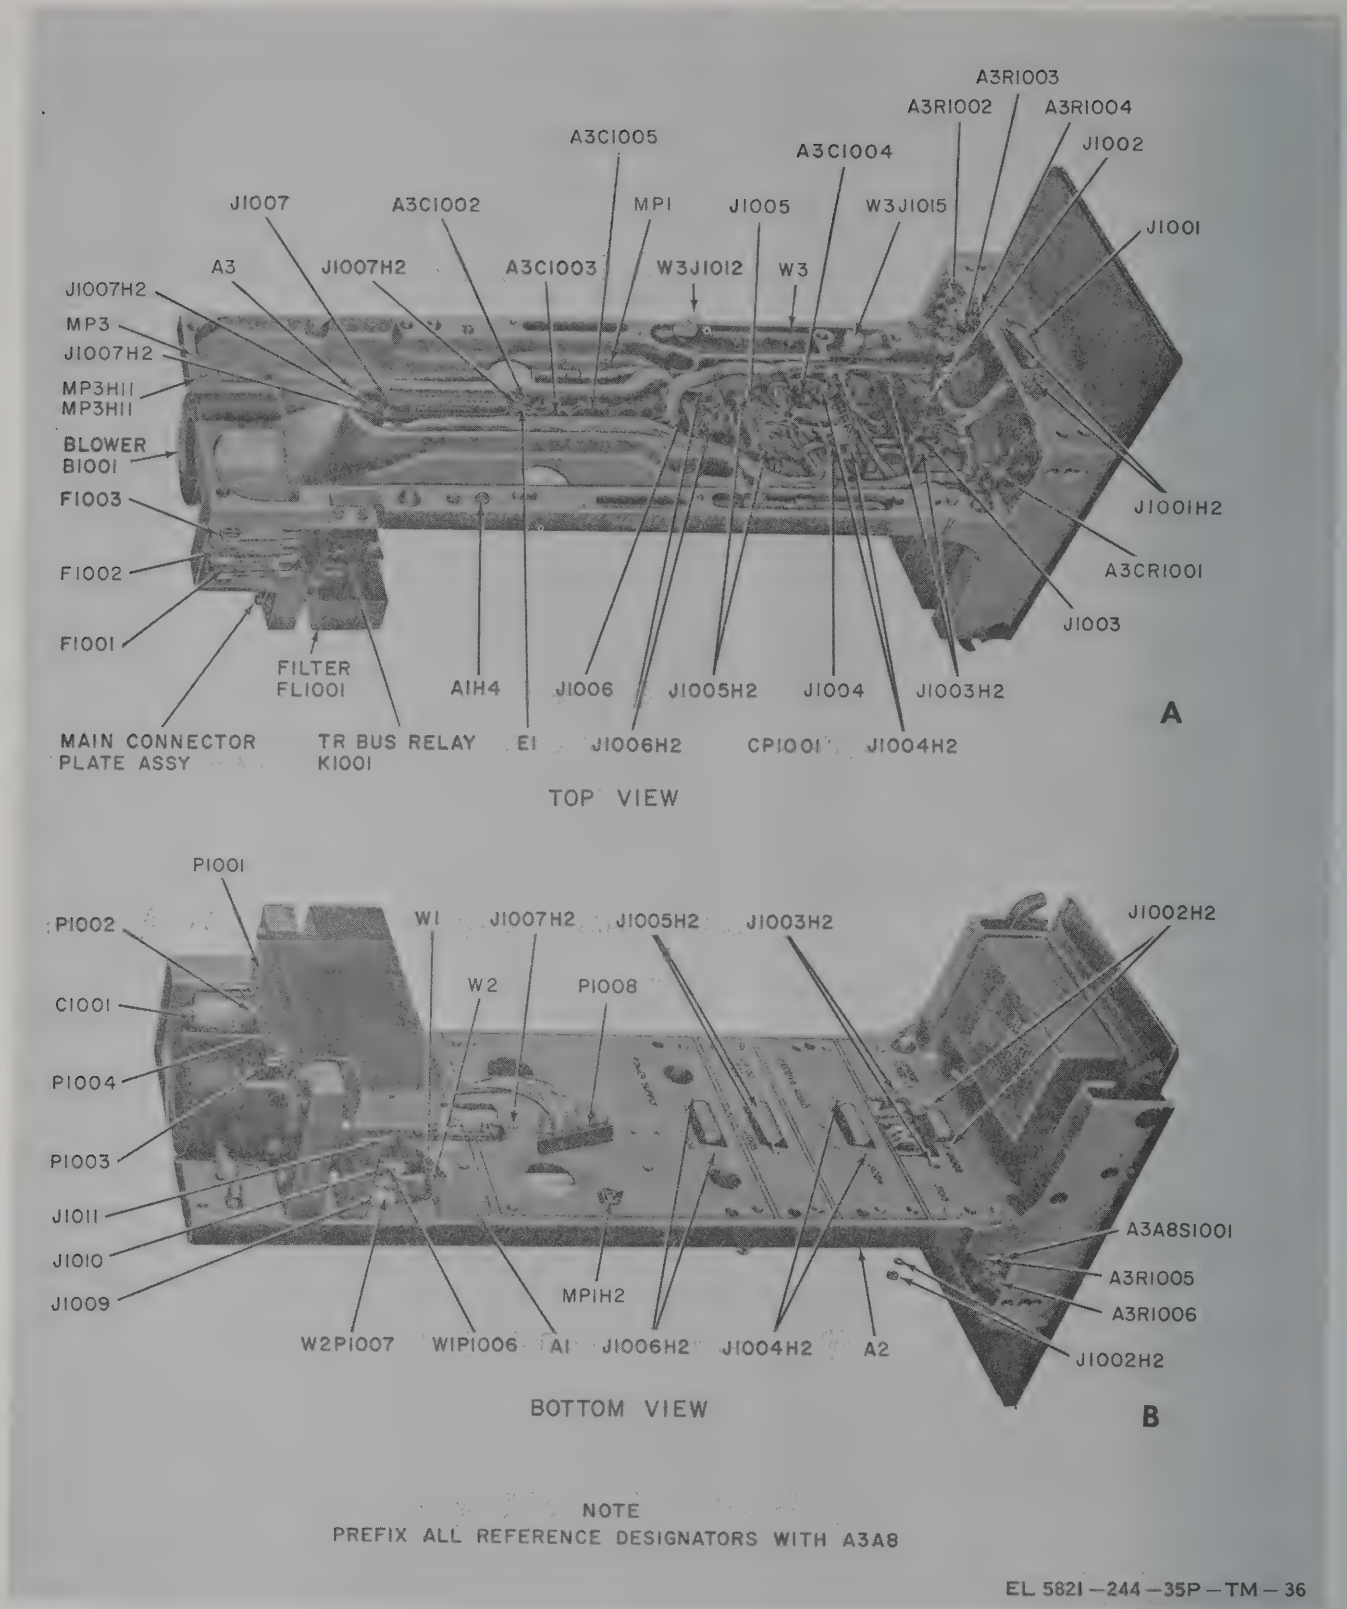

Figure 36. Main chassis.

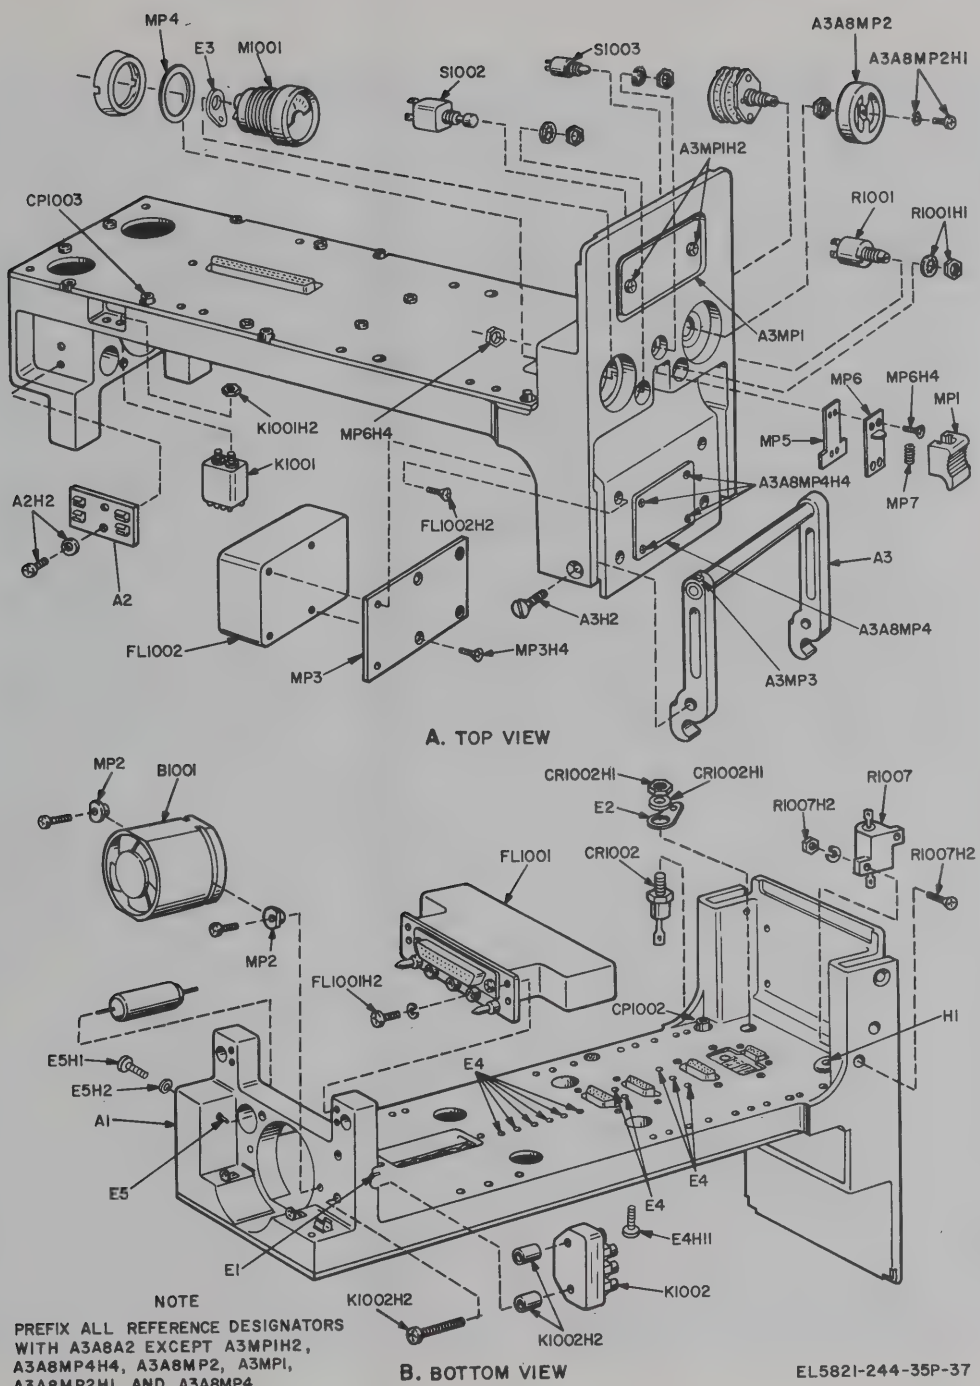

Figure 37. Main chassis.

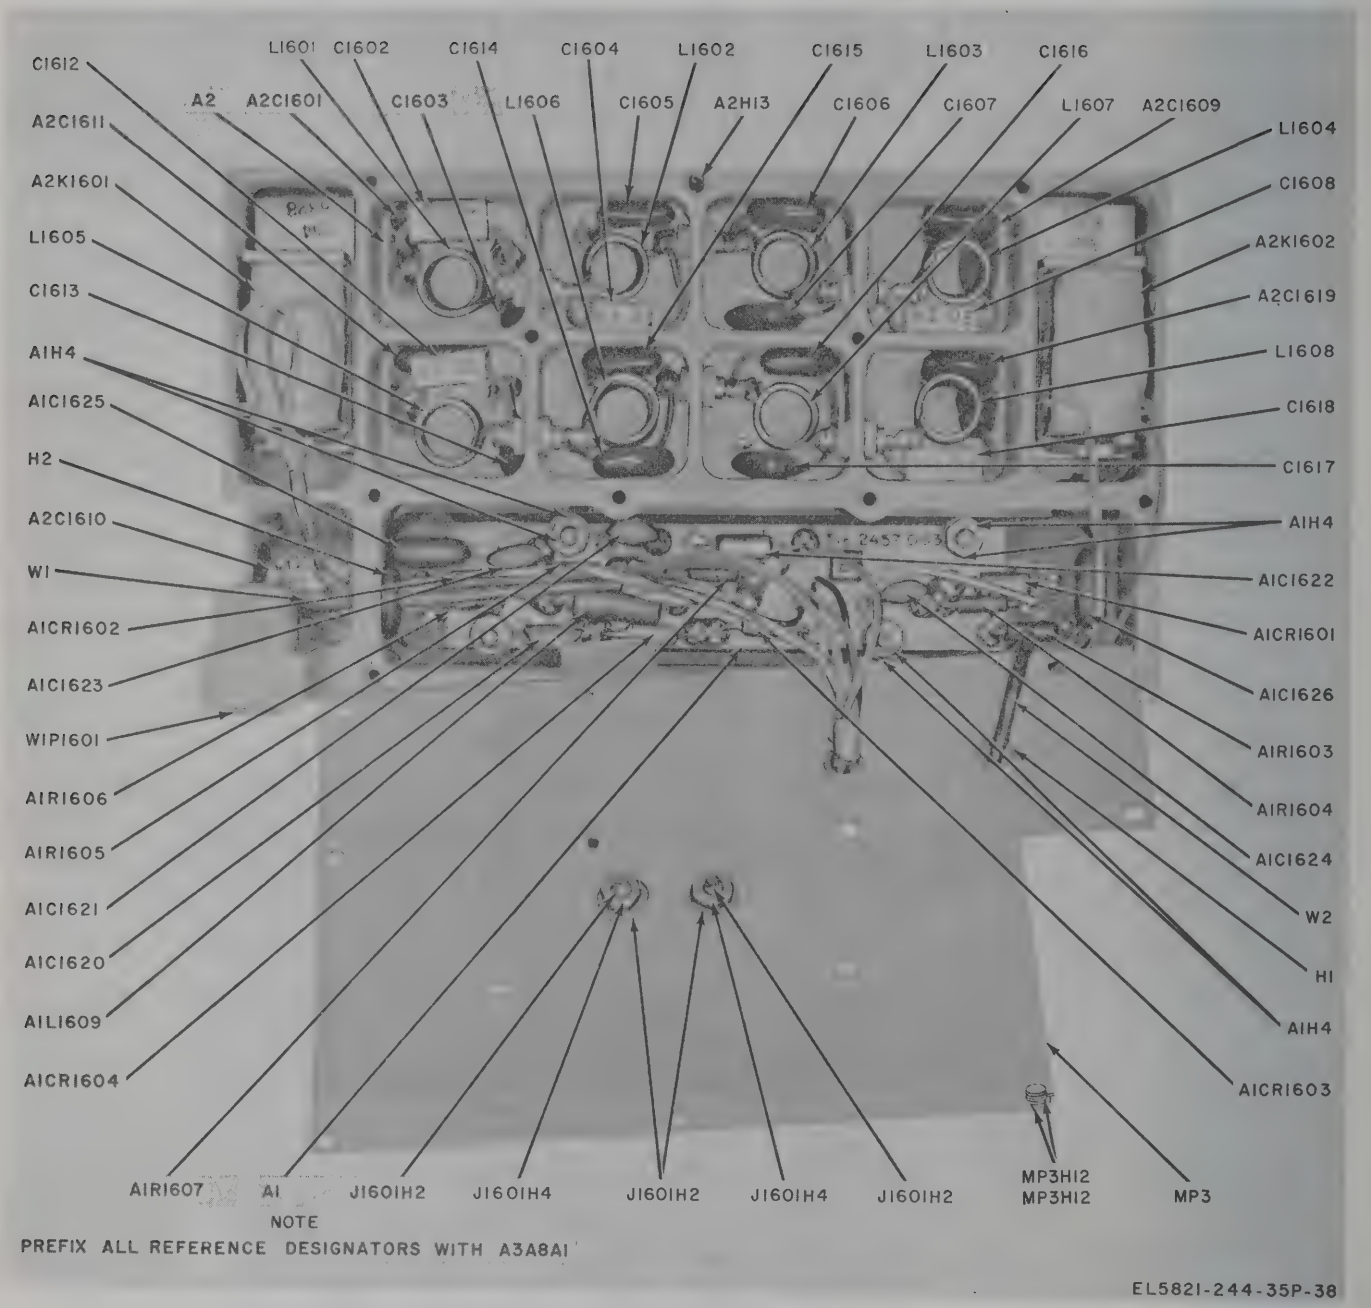

Figure 38. Harmonic filter.

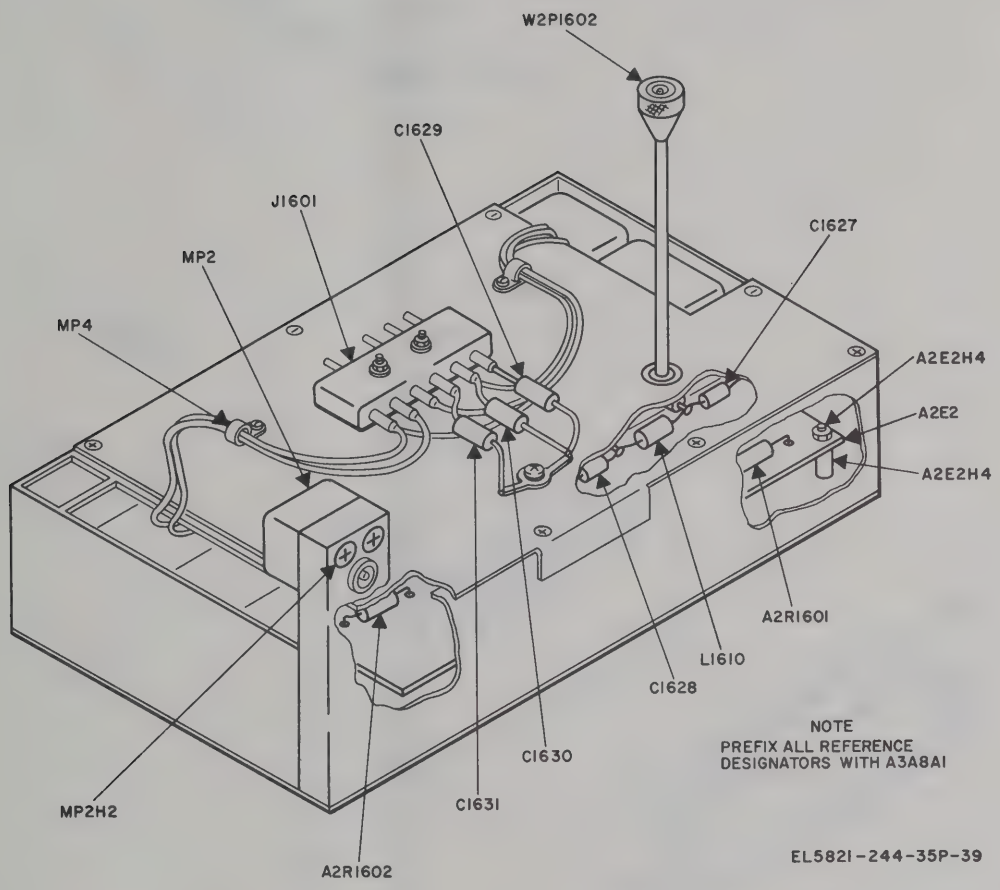

Figure 39. Harmonic filter.

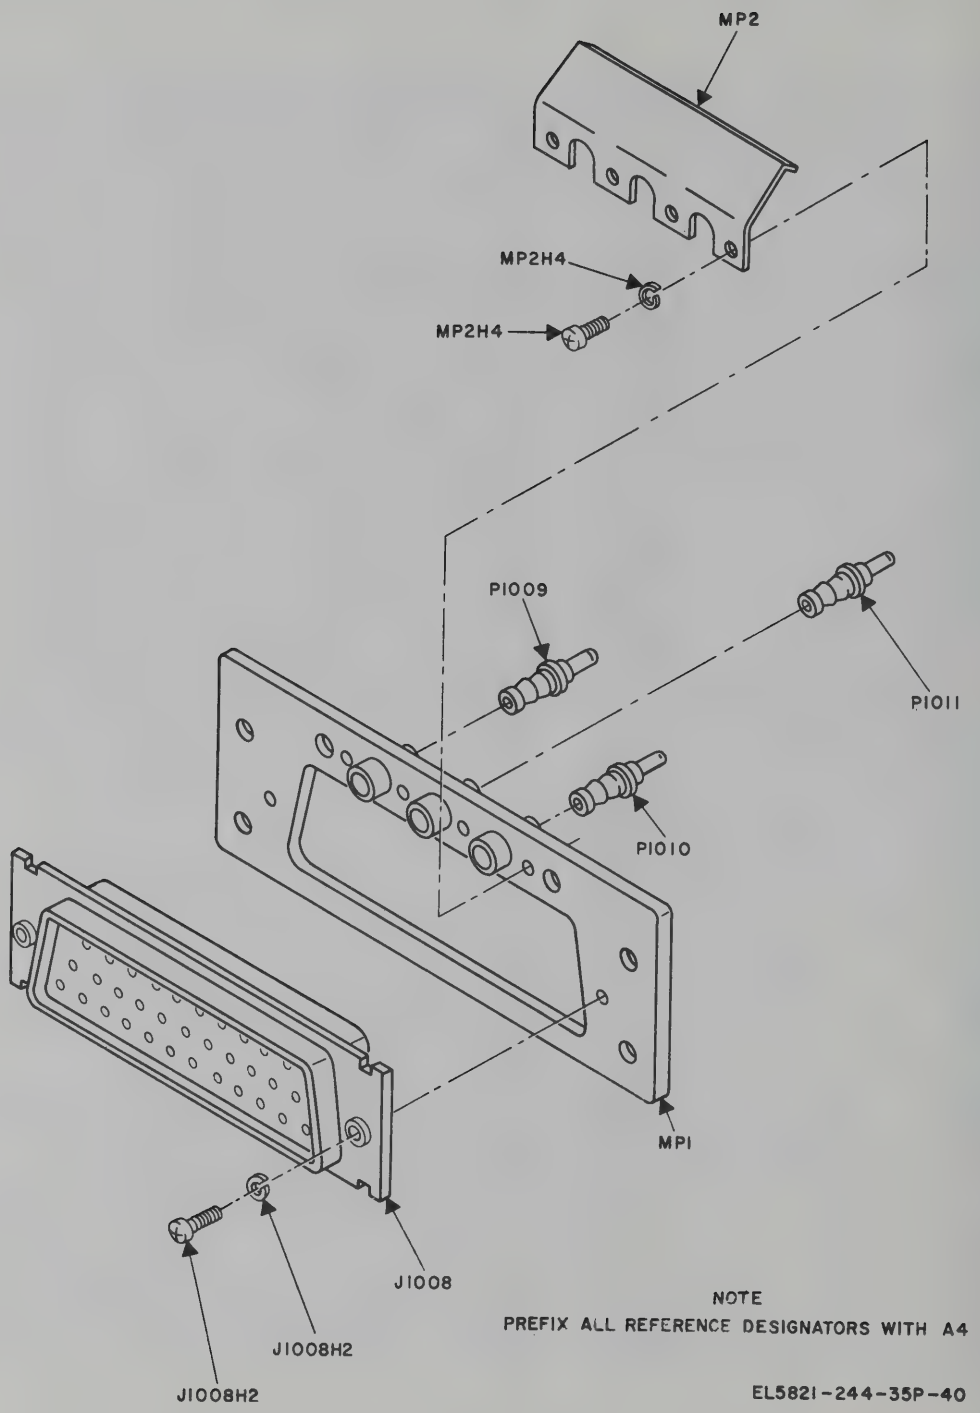

Figure 40. Connector assembly.

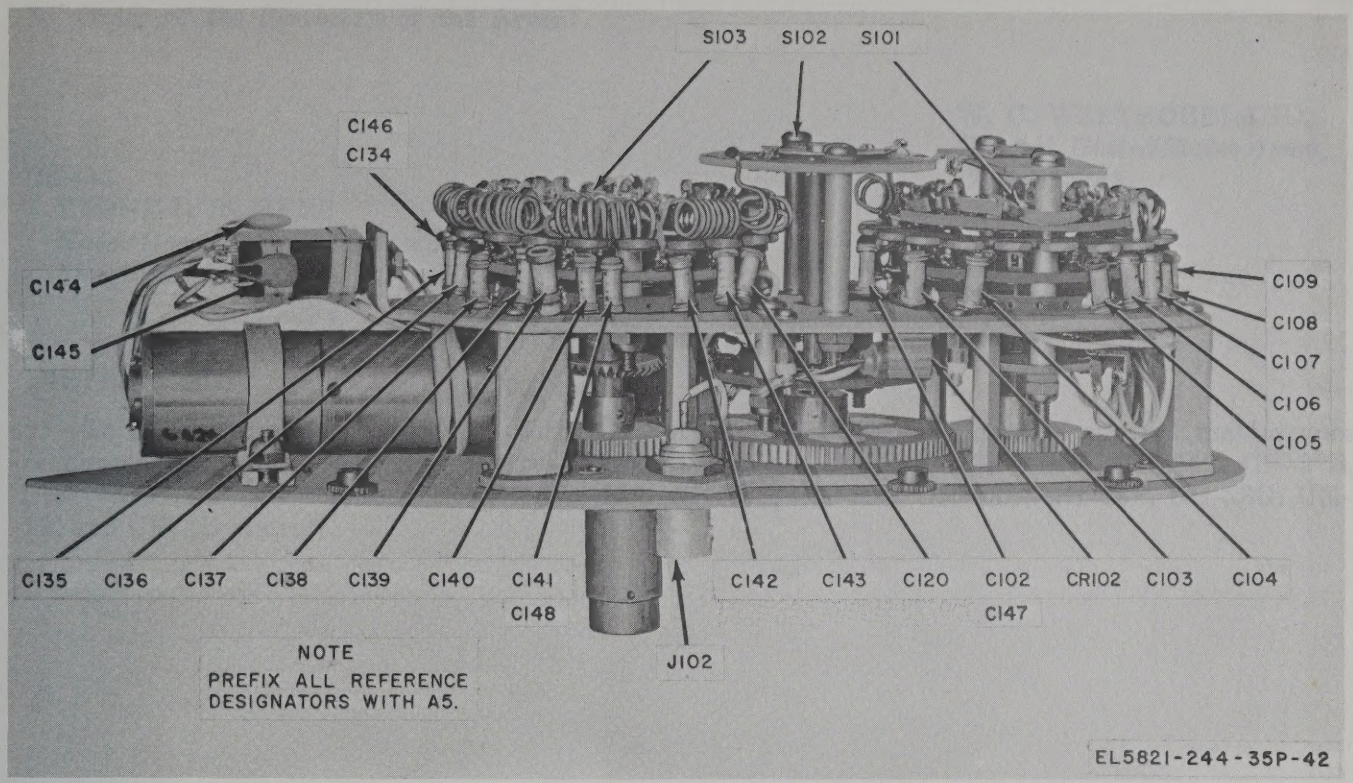

Figure 42. Antenna coupler.

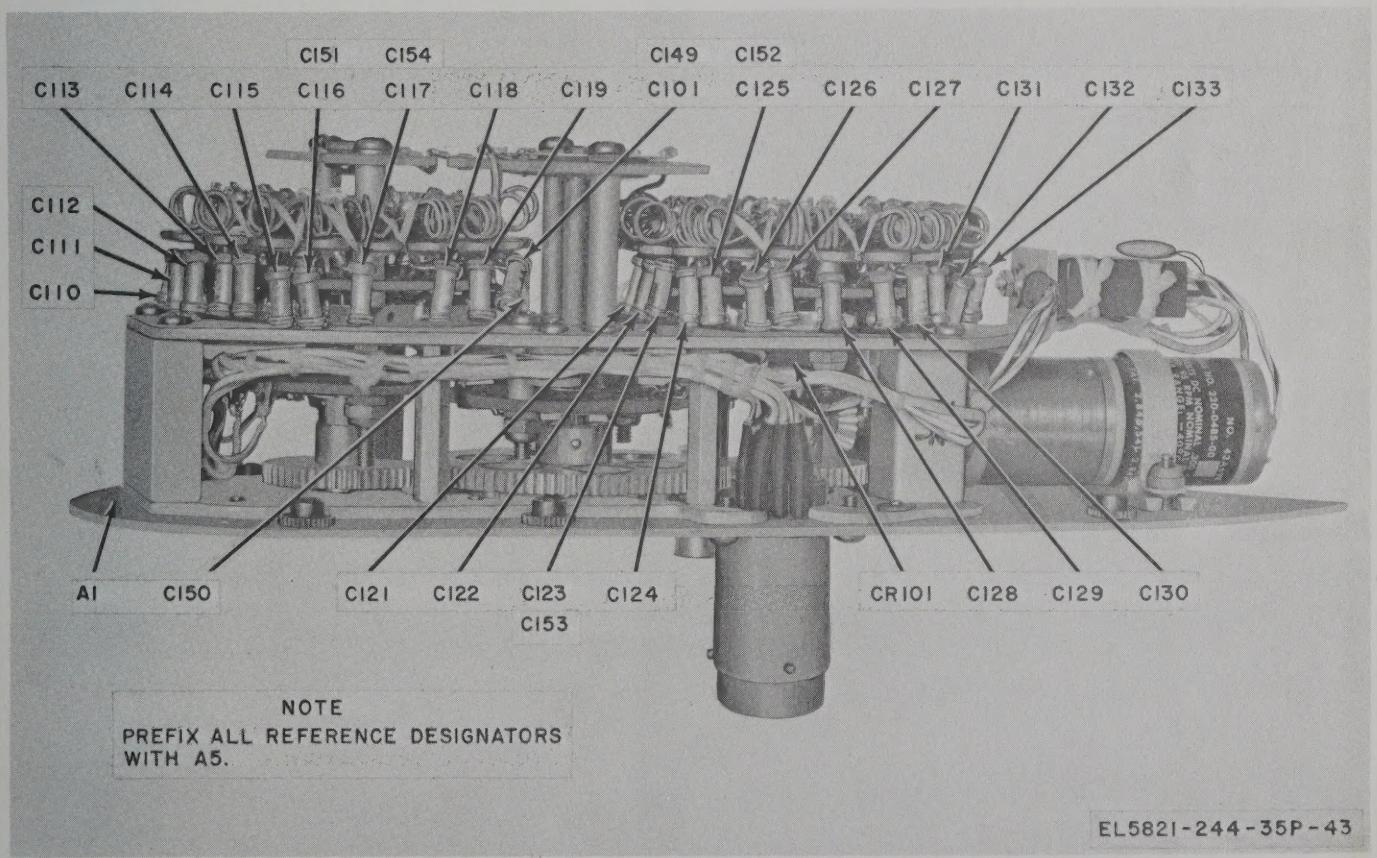

Figure 43. Antenna coupler.